


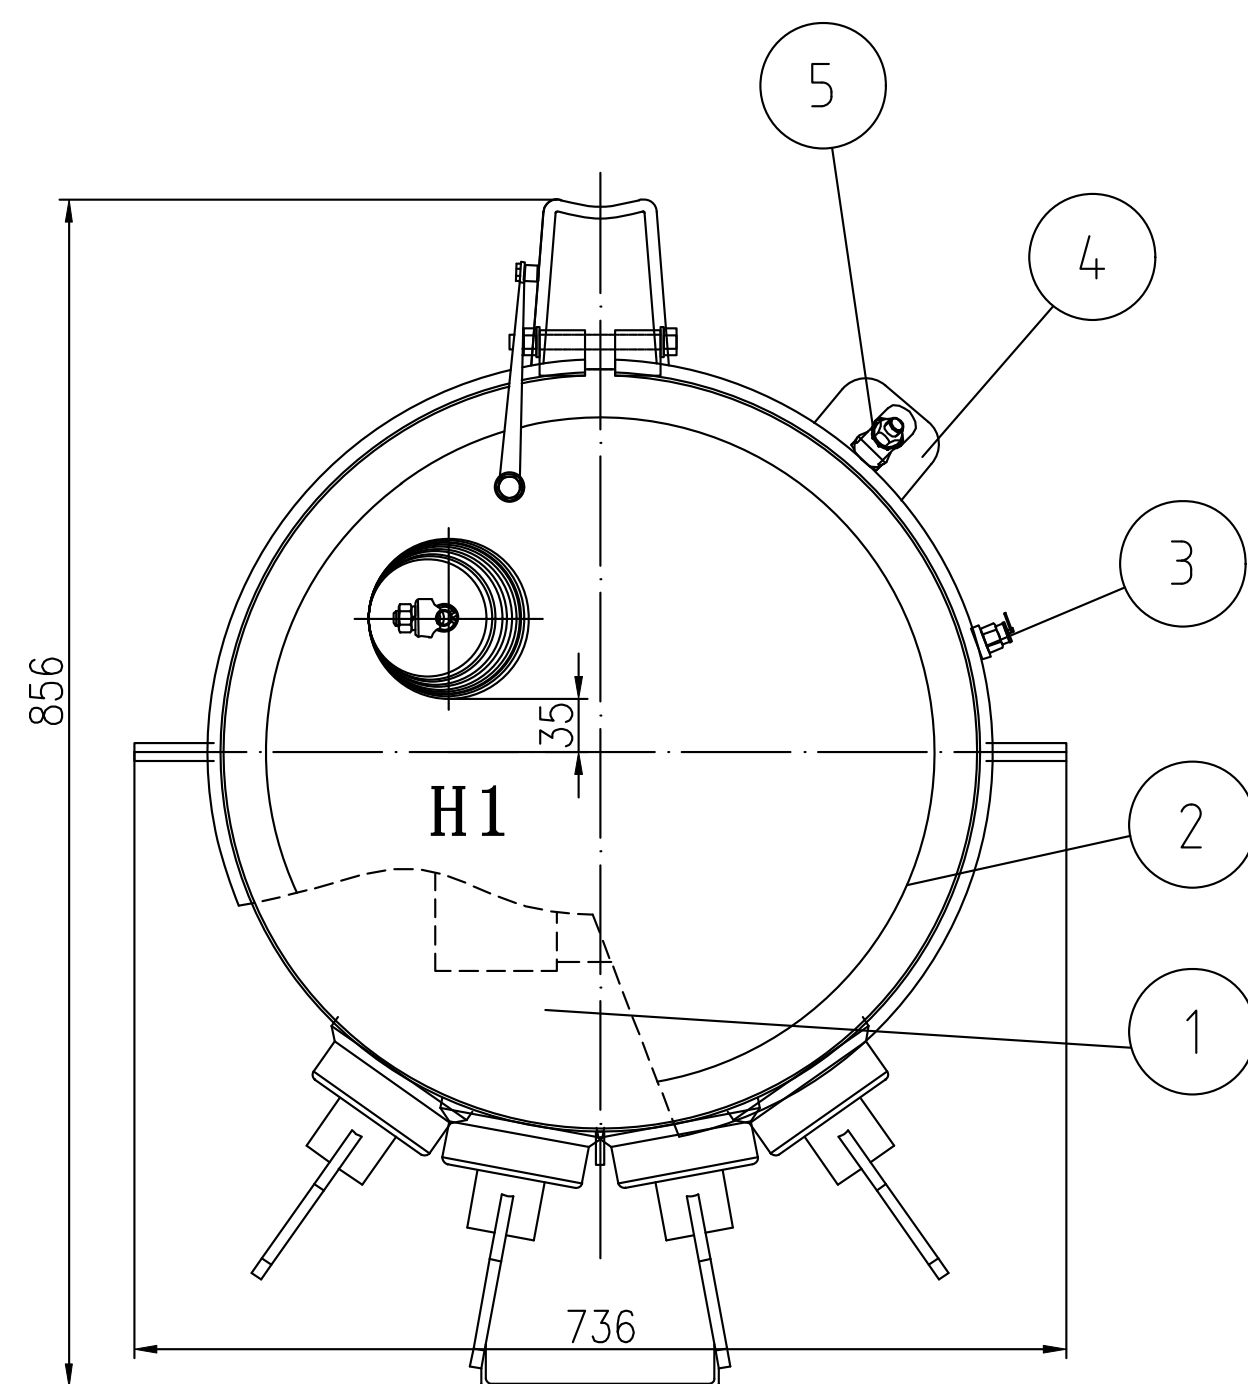


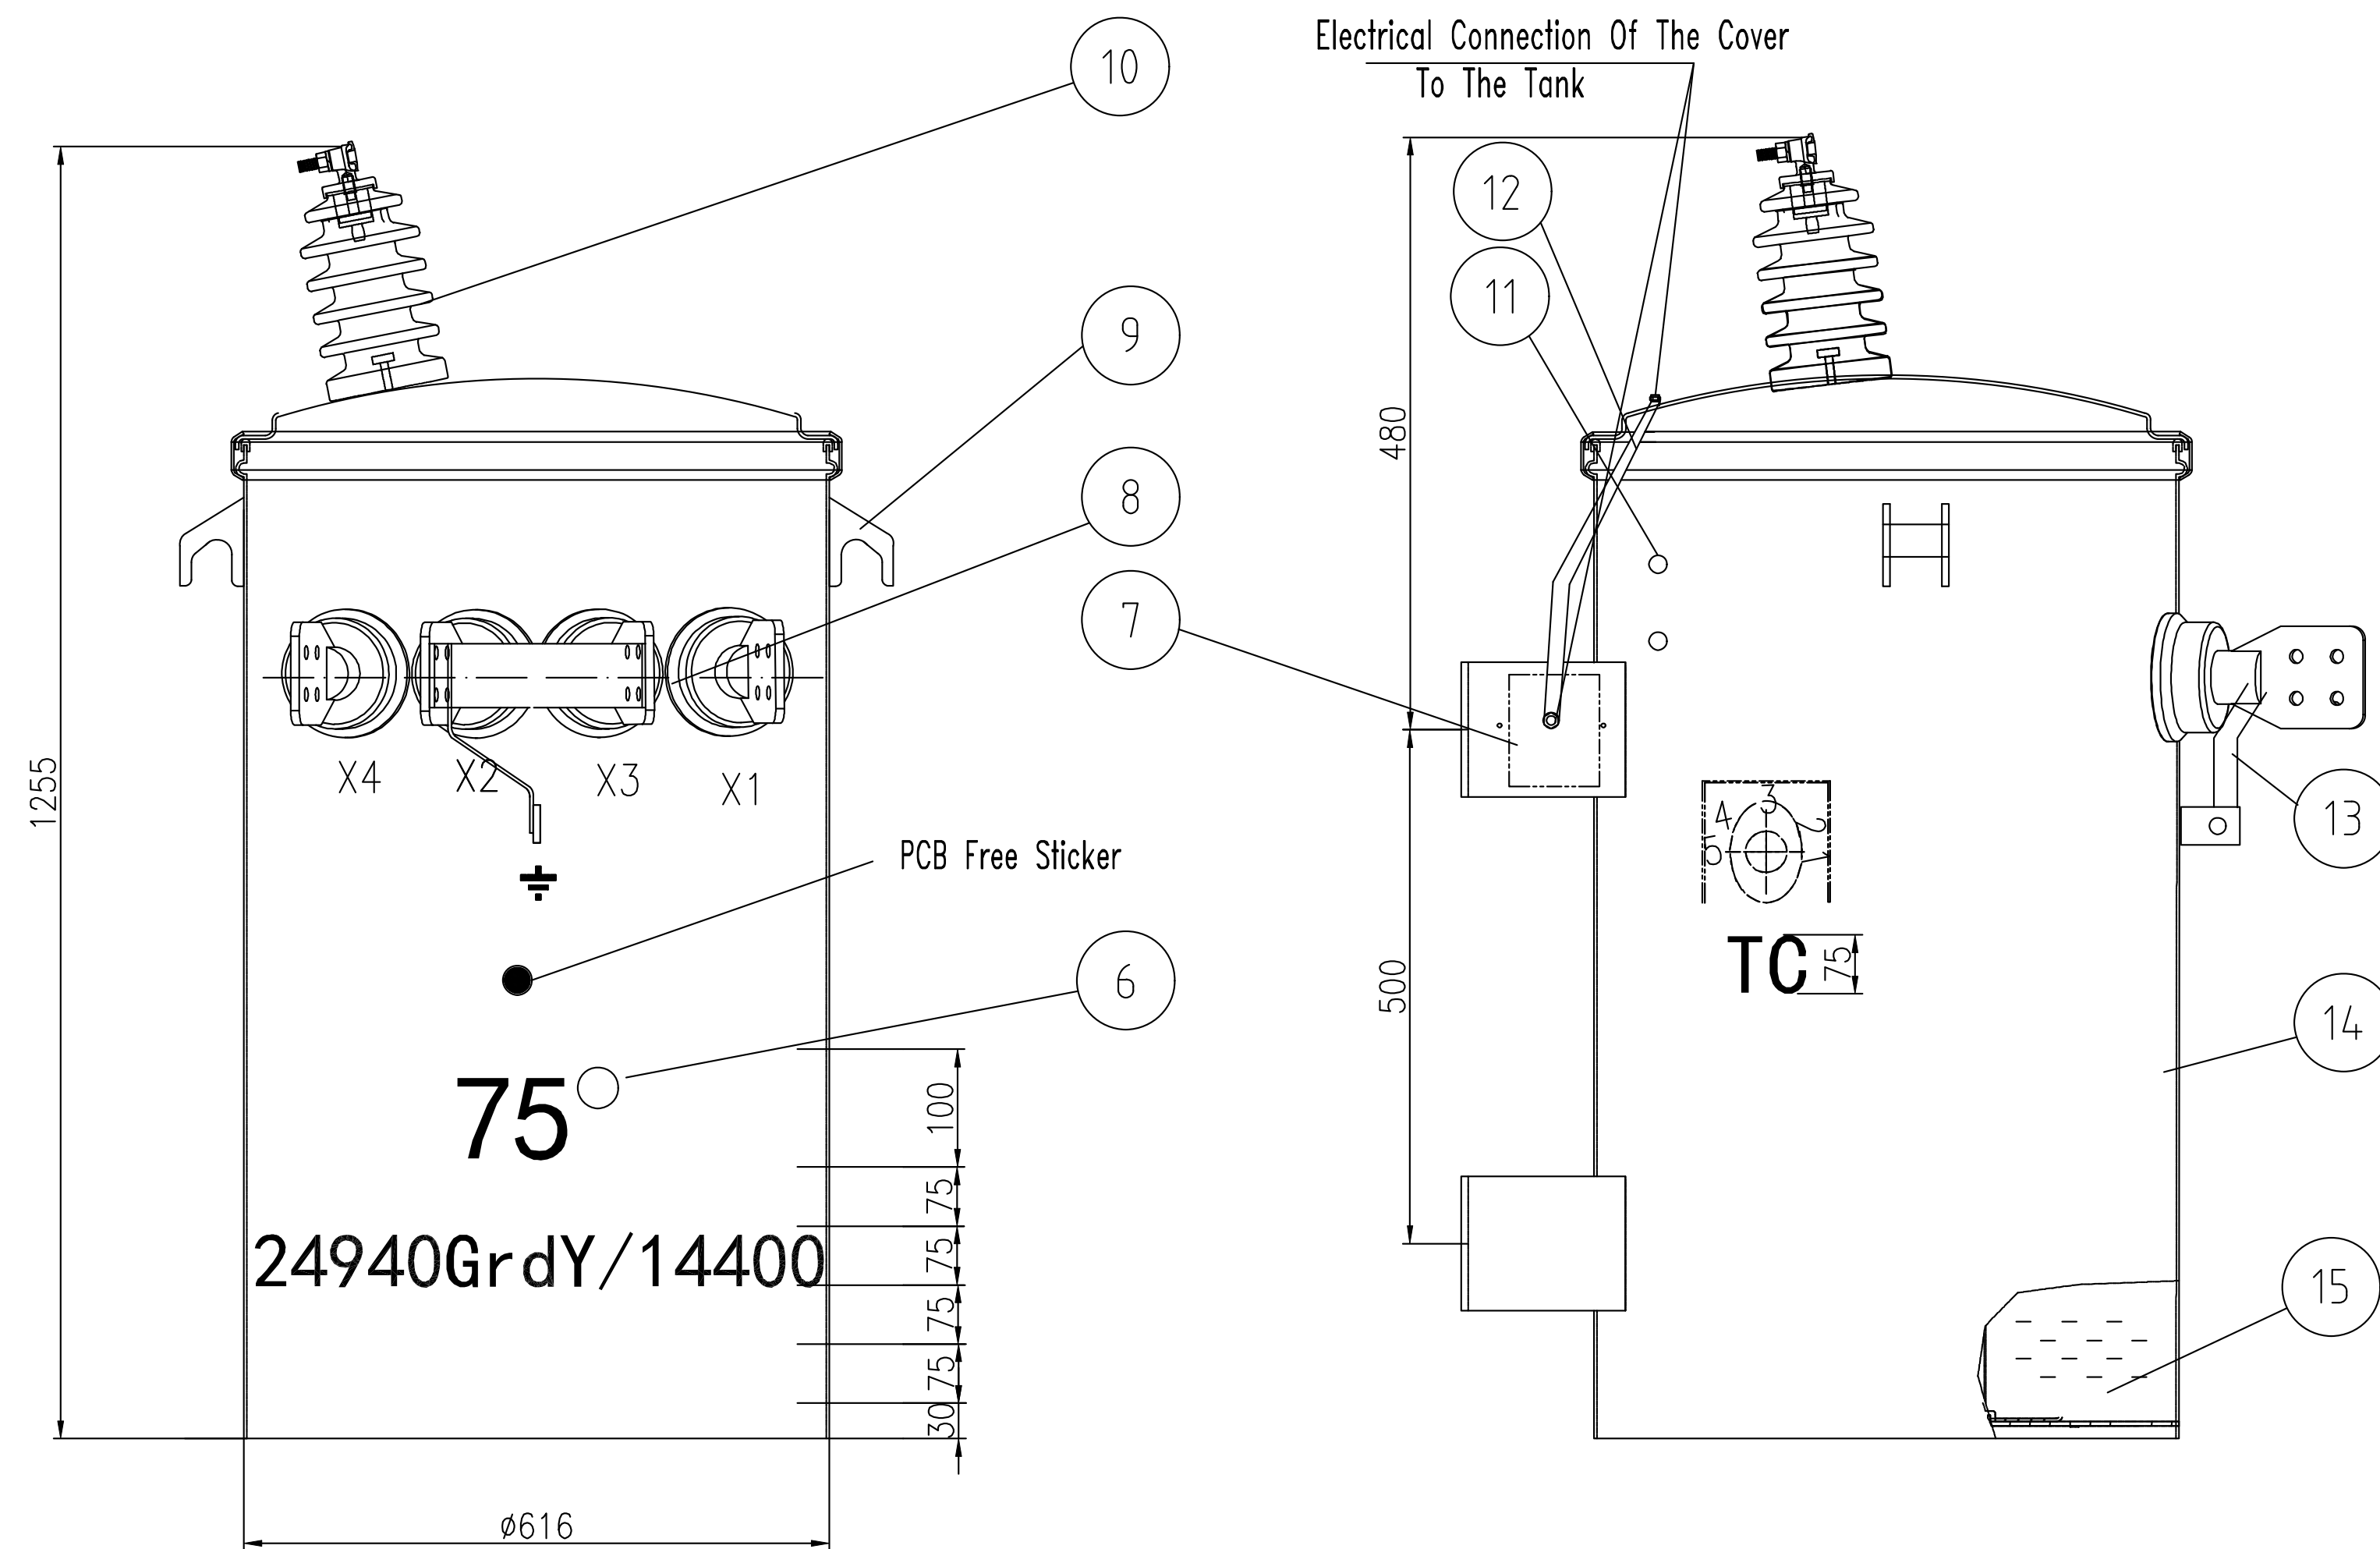

LV BUSHING TERMINAL

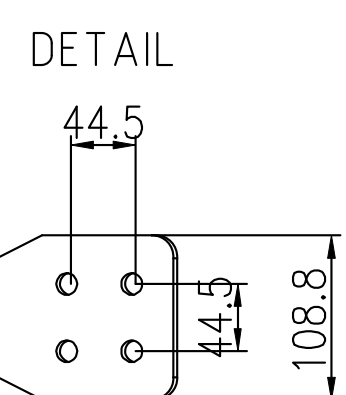

HV BUSHING TERMINAL

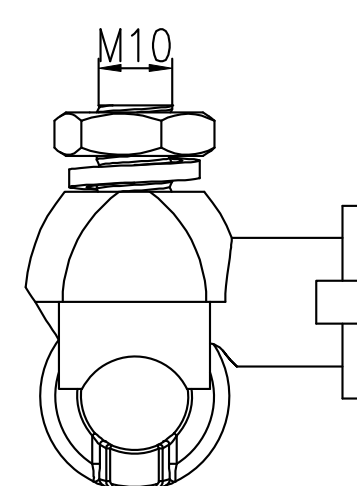

TECHNICAL DATA

RATING	75kVA
PRIMARY VOLTAGE(V)	24940GrdY/14400
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	650W
NO LOAD LOSSES	190W
IMPEDANCE	2.0%--3.0%
ALTITUDE	≤ 1000m
COLOR	ANSI GRAY
POLARITY	ADDITIVE

ITEM	WEIGHT
UNTANK WEIGHT	772Lbs
TOTAL OIL WEIGHT	375Lbs
TOTAL WEIGHT	1290Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	4
9	Lifting Hook	2
10	HV Bushing	1
11	Lightning Arrester Nut	4
12	Electrical Connection Of The Cover To The Tank	1
13	Copper Strip	1
14	Tank	1
15	Transformer Oil	

					DL-75/24.94-0.12		DWG: DL75-240227-01	
					84		QTY	WEIGHT
					JZP POWER TRANSFORMER		SCALE	B/0
REMARK	SUBAREA	ALTERATION NO.	SIGNATURE	DATE				
DESIGN	MIKE W	VERIFY	IRIS J					
CHECK	ELLA W	APPROVE	SAM S					
CRAFT								
STANDARDIZE		DATE	2024.2.27					