

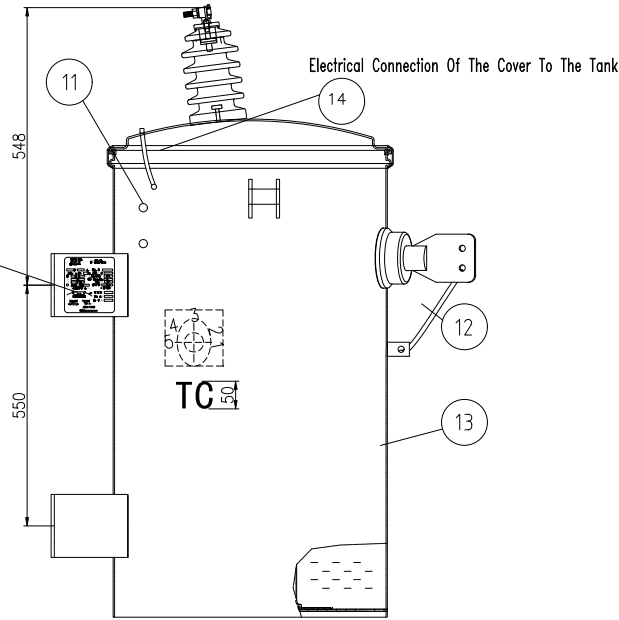
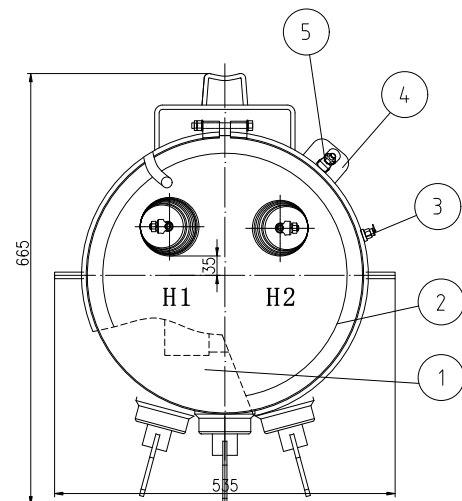
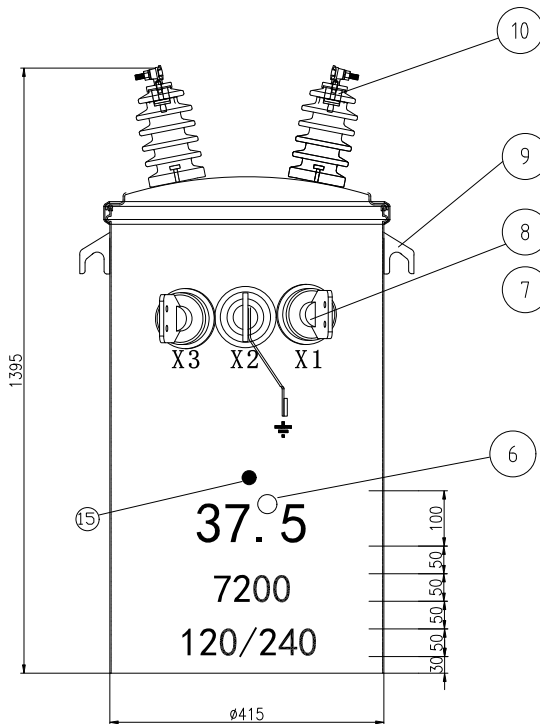


LV BUSHING TERMINAL
DETAIL



HV BUSHING TERMINAL
DETAIL



REMARK	SUBAREA	ALTERATION NO.	SIGNATURE	DATE
DESIGN	MIKE W	VERIFY	IRIS J	
CHECK	ELLA W	APPROVE	SAM S	
CRAFT				
STANDARDIZE				

TECHNICAL DATA					
RATING		37.5			
PRIMARY VOLTAGE(V)		7200			
SECONDARY VOLTAGE(V)		120/240			
INSULATION LEVEL(kV)H.V BIL		95			
INSULATION LEVEL(kV)L.V BIL		30			
FREQUENCY		60Hz			
VECTOR GROUP		LI0			
CONDUCTOR		COPPER			
POSITION OFF-LOAD TAP CHANGER		±2×2.5%			
MAGNETIC DENSITY		≤15T			
ELECTRICAL DENSITY		≤2.5A/mm ²			
INSULATING OIL		FR3 VEGETABLE OIL			
TEMPERATURE RISE		65°C			
LOAD LOSS AT RATED VOLTAGE		360W			
NO LOAD LOSSES		105W			
IMPEDANCE		2.0%--3.0%			
POLARITY		ADDITIVE			
ALTITUDE		≤5500 feet			
COLOR		ANSI 70			
ITEM		WEIGHT			
UNTANK WEIGHT		507Lbs			
TOTAL OIL WEIGHT		90 L			
TOTAL WEIGHT		795Lbs			
PARTS LIST					
ITEM	DESCRIPTION		QTY		
1	Core&Coil Assemble		1		
2	Tank Cover		1		
3	Pressure Relief Device		1		
4	Grounding Terminal		3		
5	Tap Changer		1		
6	Marking on the Tank		1		
7	Nameplate		1		
8	LV Bushing		3		
9	Lifting Hook		2		
10	HV Bushing		2		
11	Lightning Arrester Nut		4		
12	Copper Strip		1		
13	Stainless Steel Tank(304)		1		
14	Electrical Connection Of The Cover To The Tank		1		
15	PCB Free		1		
	D-37.5/7.2-0.24	DWG: D37.5-240222-01			
		QTY	WEIGHT	SCALE	
					B/O
DATE					
IRIS J					
SAM S					
2024.2.22					

Signature

JZP POWER TRANSFORMER



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH 37.5 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 95/30 kV TEMPRATURE RISE 65°C

HV 7200 V CONDUCTOR MATERIAL CU

LV 120/240 V FREQUENCY 60Hz

☐ POLARITY ADDITIVE TYPE OF OIL FR3 ☐



STANDARD PER CSA C 2.1 < 1PPM PCB

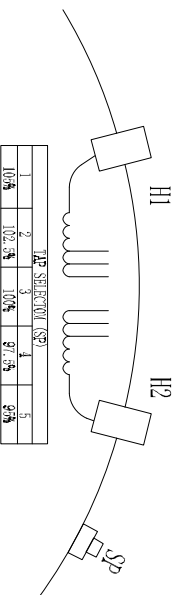

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.



JIEZOU POWER

WWW.jiezoupower.com