
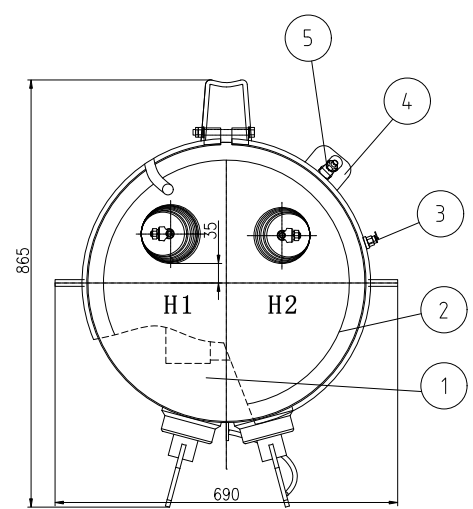


TECHNICAL DATA	
RATING	75kVA
PRIMARY VOLTAGE(V)	25000
SECONDARY VOLTAGE(V)	600
INSULATION LEVEL(kV)H.V BIL	150
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALMINUM
POSITION OFF-LOAD TAP CHANGER	±2x2.5%
POLARITY	SUBTRACTIVE
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	1300W
NO LOAD LOSSES	220W
IMPEDANCE	2.3%--3%
ALTITUDE	≤ 1000m
COLOR	LIGHT GREY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	728Lbs
TOTAL OIL WEIGHT	265Lbs
TOTAL WEIGHT	1113Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Copper Strip	1
13	Tank	1
14	Transformer Oil	

DL-75/25/0.6 Outling Drawing						2024PI01MG18-001-JZMG231211-75KVA	
Remart	Time	Subarea	Signature	Date	SM	JIEZOU POWER	
Design	XBW	Standardiza				TRANSFORMER	
Date	03/20/24						
Check	JACK	Verify	IRIS				
Craft		Approve	SAM				

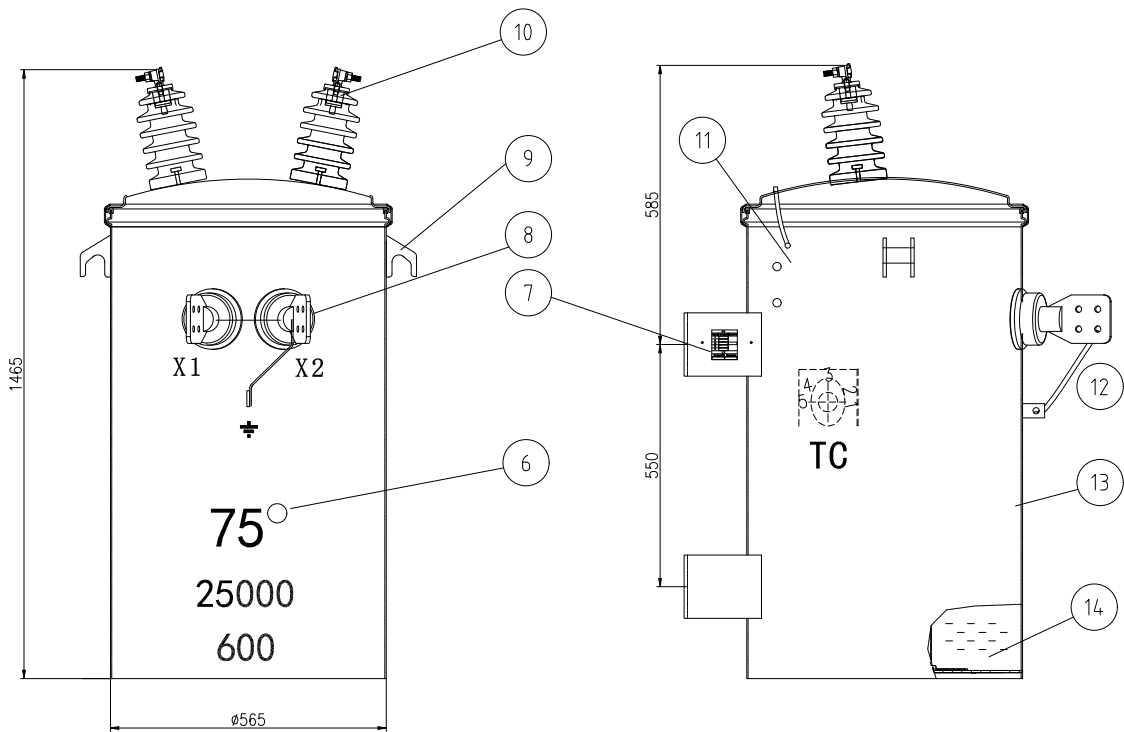

SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH 75 kVA SERIAL NO.


IMPEDANCE AT 85°C % PRODUCT NO.

BIL 150/30 kV TEMPRATURE RISE 65°C

HV 25000 V CONDUCTOR MATERIAL AL

LV 600 V FREQUENCY 60Hz

☐ POLARITY SUBTRACTIVE TYPE OF OIL MINERAL ☐
STANDARD PER CSA C 2.1 < 1PPM PCB

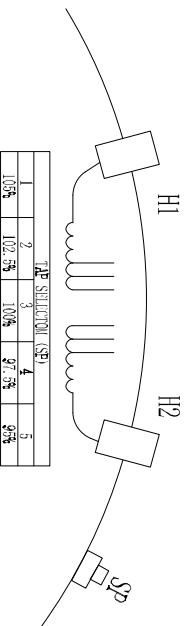

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.

JIEZOU POWER

WWW.jiezoupower.com