

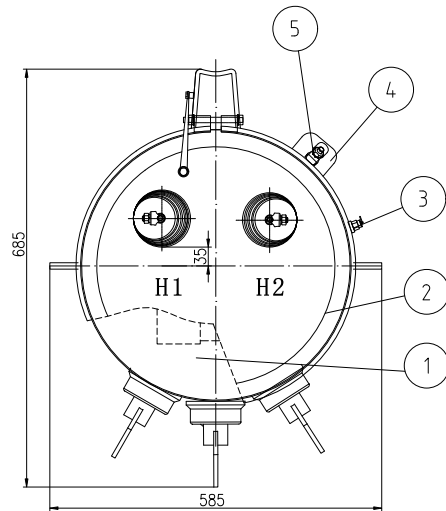
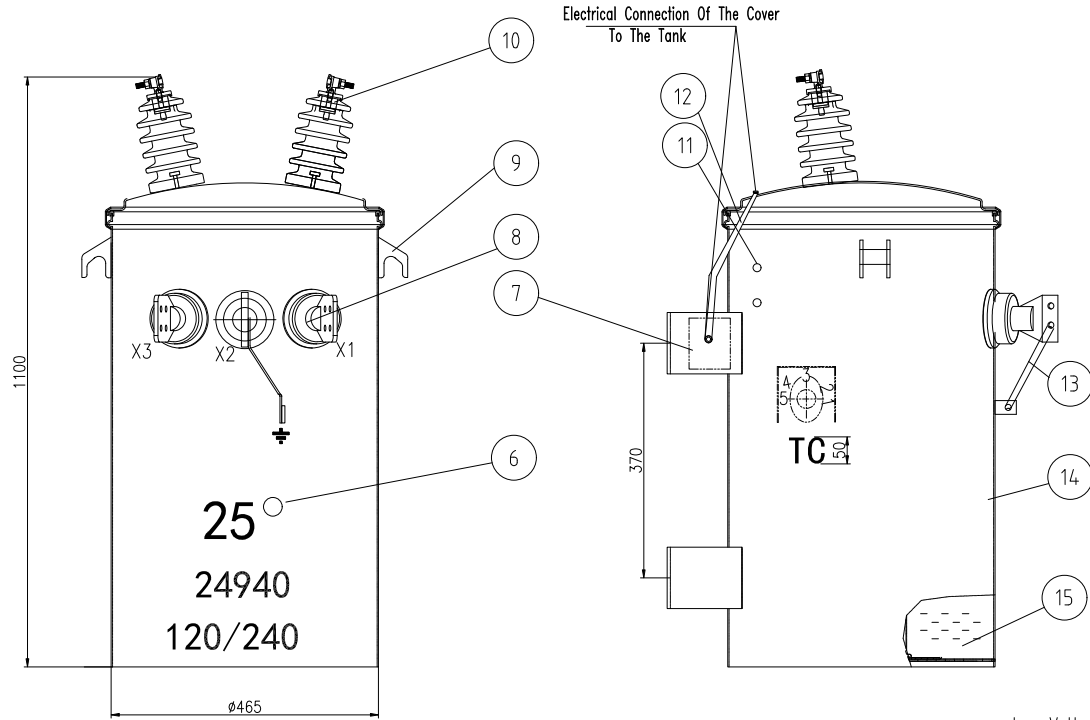





LV BUSHING TERMINAL
DETAIL



TECHNICAL DATA

RATING	25kVA
PRIMARY VOLTAGE(V)	24940
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV) H.V BIL	150
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II6
CONDUCTOR	AL
CORE FLUX DENSITY	≤1.5 T
CURRENT DENSITY	≤2.8A/mm²
LOAD LOSS AT RATED VOLTAGE	450W
NO LOAD LOSSES	80W
TEMPERATURE RISE	65°C
EFFICIENCY	98.63%
IMPEDANCE	2~2.5%
INSULATING OIL	MINERAL OIL
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	ANSI GREY
POLARITY	ADDITIVE
APPLIED STANDARD.	CSA C2.1 CSA C802.1
ITEM	WEIGHT
UNTANK WEIGHT	320 LBS
TOTAL OIL WEIGHT	85 GAL
TOTAL WEIGHT	620 LBS

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	3
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Electrical Connection Of The Cover To The Tank	1
13	Copper Strip	1
14	Tank	1
15	Transformer Oil	

JZP-DL-25/24.94/0.12-0.24

Outling Drawing

JIEZOU POWER

JZMG231214-4 25kVA

JZP
POWER TRANSFORMER

Design	XBW	Standardize	
Check	JACK		
Check	IRIS		
Approve	SAM	Date	05.04.24



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH 25 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 150/30 kV TEMPRATURE RISE 65°C

HV 24940 V CONDUCTOR MATERIAL AL

LV 120/240 V FREQUENCY 60Hz


☐ POLARITY ADDITIVE TYPE OF OIL MINERAL ☐

STANDARD PER CSA C 2.1 < IPPM PCB

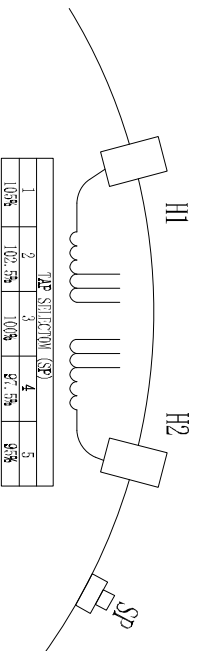

VOL OF OIL:

TOTAL MASS:

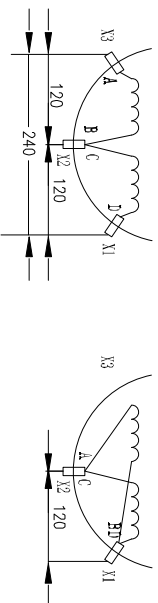

DATE OF MFG.

JIEZOU POWER

WWW.jiezoupower.com