




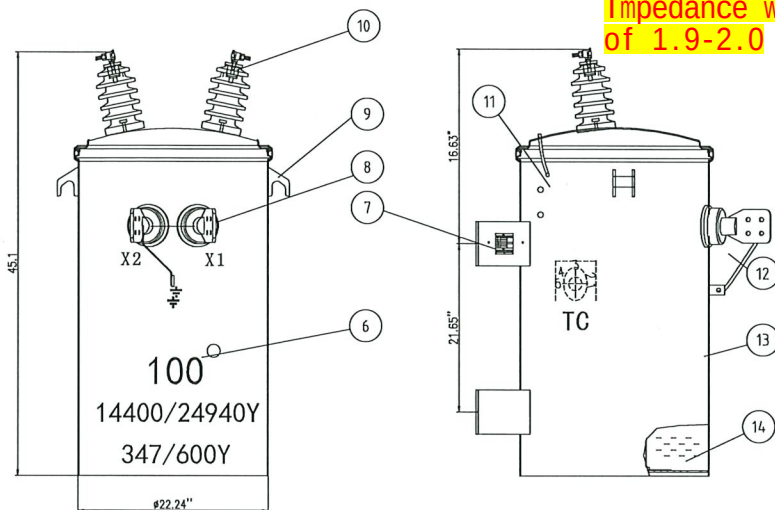


Impedance within 10%
of 1.9-2.0

TECHNICAL DATA	
RATING	100kVA
PRIMARY VOLTAGE(V)	14400 / 24940 Y
SECONDARY VOLTAGE(V)	347 / 600 Y
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LIO
CONDUCTOR	Aluminum
POSITION OFF-LOAD TAP CHANGER	±2x2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	1150W
NO LOAD LOSSES	160W
IMPEDANCE	2%--2.25%
ALTITUDE	< 1000m
COLOR	LIGHT GREY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	475Lbs
TOTAL OIL WEIGHT	232Lbs
TOTAL WEIGHT	805Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	3
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Copper Strip	1
13	Tank	1
14	Transformer Oil	

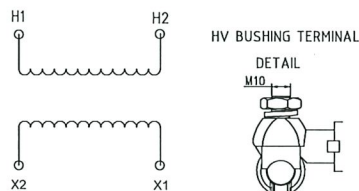

DL100/14,4/0.347 Outling Drawing	2024P030426-001-JZHG240113-1-PO_135778
Transformer	

March 25th, 2024

SINGLE PHASE POLE MOUNTED TRANSFORMER

1 PH 100 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 125/30 kV TEMPERATURE RISE 65°C

HV 14400/24940V V CONDUCTOR MATERIAL AL


LV 347/600V V FREQUENCY 60Hz

POLARITY ADDITIVE TYPE OF OIL MINERAL

STANDARD PER CSA C 2.1 < 1PPM PCB



IP SPECIM 1597			
1597	100.00	100.00	100.00
1597	100.00	100.00	100.00



VOL OF OIL:
TOTAL MASS:
DATE OF MFG.

S. D. Daman March 23, 2024