


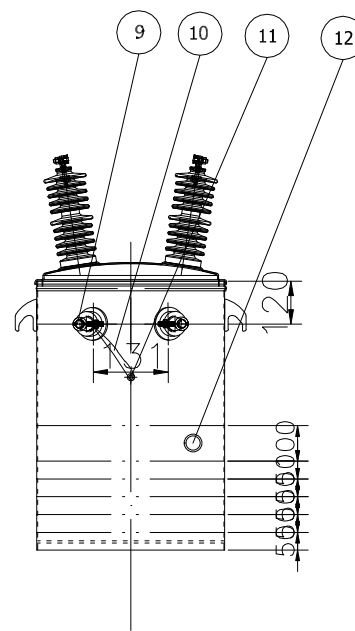




LV BUSHING TERMINAL DETAIL



HV BUSHING TERMINAL DETAIL



TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	12000
SECONDARY VOLTAGE(V)	480/277
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	IIO
CONDUCTOR	AL
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	620W
NO LOAD LOSSES	120W
IMPEDANCE	>2%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	355 Lbs
TOTAL OIL WEIGHT	255 Lbs
TOTAL WEIGHT	690 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (25kV,25A)	2
2	TANK COVER	1
4	LIFTING LUG	2
5	GROUNDING COUNECTOR	2
6	NAMEPLATE	1
7	BOTTOM BRACKET	2
8	WEIDMANN	1
9	LV BUSHING(1.2kV ,208A)	2
10	COPPER STRIP	2
11	GROUND STEEL PADS (TTC2)	4
12	PCB	1

TYPE
D-M-50/12-0.48/0.277

DWG. NAME	General Assembly Drawing
-----------	--------------------------

DRAWN	CHECKED	CHECKED		APPROVED
Mike	Jack	Iris		Sam

FIRST ANGLE PROJECTION	SCALE	1	
			REV. NO.
			

确认！
2023年10月3日

