


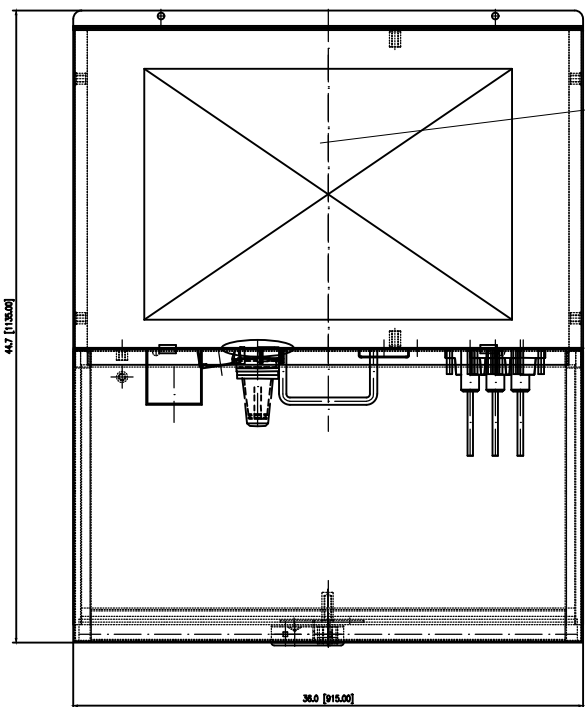
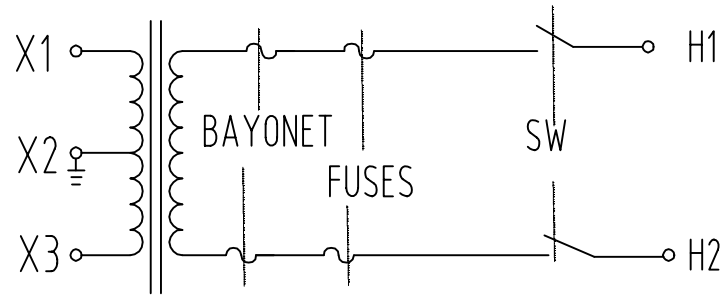
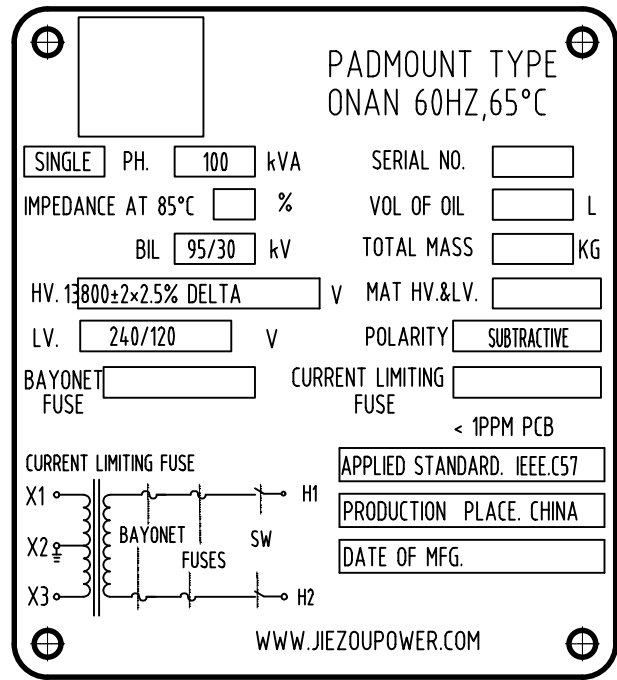


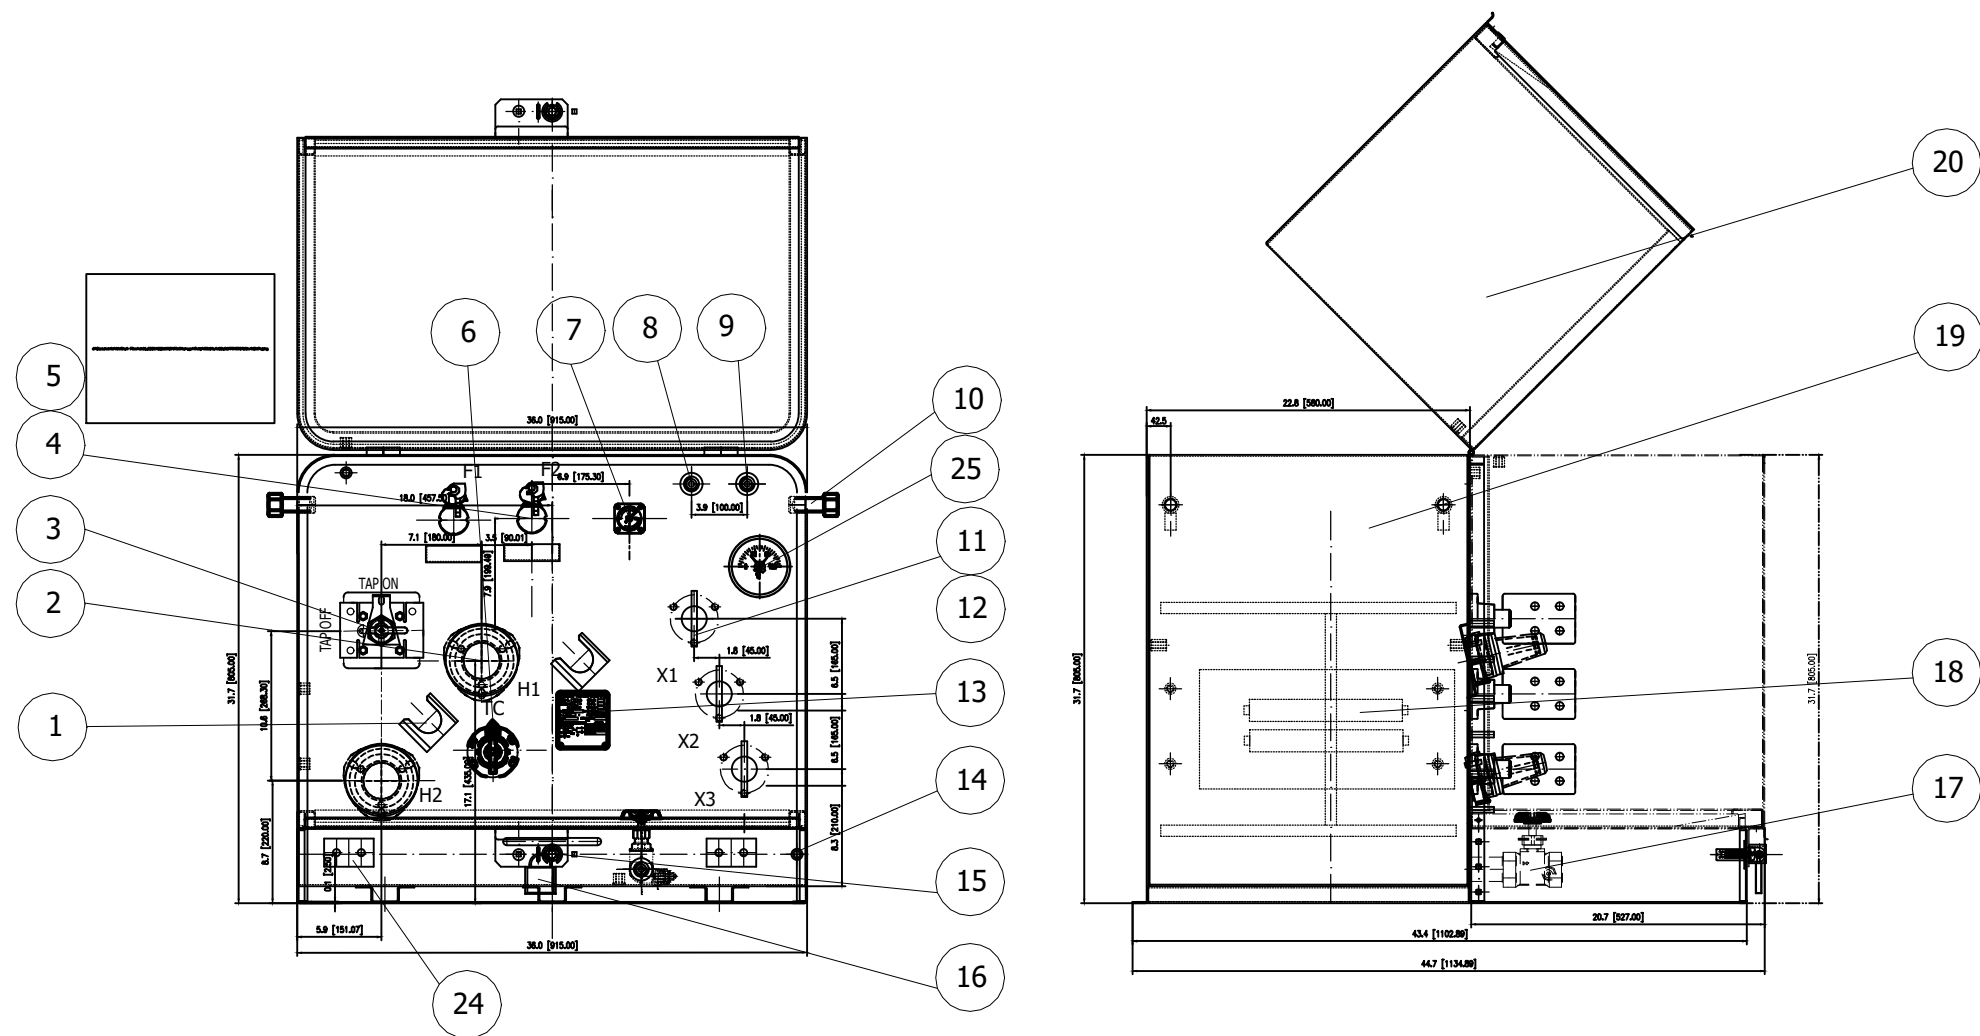


L.V. TERMINAL
DETAIL

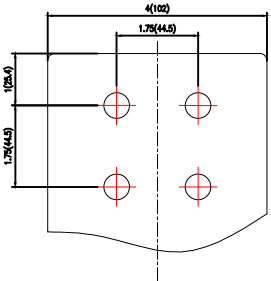

HOLD-DOWN PLATE
DETAIL



CUPPED WASHER
DETAIL



TECHNICAL DATA	
RATING	100kVA
PRIMARY VOLTAGE(V)	13800±2*2.5%DELTA
SECONDARY VOLTAGE(V)	240/120
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	CU
MINERAL OIL	MINERAL OIL
TEMPERATURE RISE	65°C
EFFICIENCY	99.15%
LOAD LOSS AT RATED VOLTAGE	1150
NO LOAD LOSSES	150
IMPEDANCE	>1.8%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	Munsell 7GY 3.29/1.5
POLARITY	SUBTRACTIVE
APPLIED STANDARD.	ANSI/IEEE

ITEM	WEIGHT
TANK & ACCESSORIES	390 Lbs
TOTAL OIL WEIGHT	850 Lbs
TOTAL WEIGHT	1780 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	PARKING STAND BRACKET	2
2	HV BUSHING (15kv,200A)	2
3	TWO POSITION LOADBREAKE SWITCH	1
4	BAY-O-NET SELECTION	2
5	FUSE HOLDER	2
6	TAP CHANGER 1PH	1
7	OIL LEVEL GAUGE	1
8	1" UPPER FILL VALVE	1
9	PRESSURE RELIEF VALVE	1
10	LIFTING LUG	4
11	LV BUSHING(1.2kv 5/8)	3
12	4 HOLE SPAD	3
13	NAMEPLATE	1
14	GROUND STEEL PADS (TTC2)	4
15	FIXED PROJECTING CUP	1
16	PADLOCK PENTAHEAD LOCKING BOLT	1
17	1"DRAIN VALVE WITH 3/8" SAMPLER	1
18	CURRENT LIMITING FUSE	2
19	TANK	1
20	COVER	1
21	BOLT FOR LIFTING	1
22	HOLD-DOWN PLATE	4
23	CUPPED WASHER	4
24	GROUND PAD	2
25	OIL THERMOMETER	1

TYPE					DWG. NAME			
ZGD-H-100/13.8/0.12(0.24)					GENERAL ASSEMBLY DRAWING			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.