| ITEM | WEIGHT |
|---|---|
| TANK & ACCESSORIES | 407lbs |
| TOTAL OIL WEIGHT | 76gal |
| TOTAL WEIGHT | 1730lbs |

| TECHNICAL DATA | |
|---|---|
| RATING | 75kVA |
| PRIMARY VOLTAGE(V) | 23900GRDY/13800 |
| SECONDARY VOLTAGE(V) | 240/120 |
| FREQUENCY | 60Hz |
| POLARITY | Subtractive |
| WINDING MATERIAL | AL |
| EFFICIENCY | 98.84% |
| LOAD LOSS AT RATED VOLTAGE | ≤920W |
| NO LOAD LOSSES | ≤105W |
| IMPEDANCE | ＞1.9% |
| OIL TYPE | FR3 |
| COOLING CLASS | KNAN |
| ALTITUDE | ≤1000m |
| No. OF TAP POSITION | 5 |
| COLOR | SEAFOAM GREEN Munsell7GY3.29/1.5 |

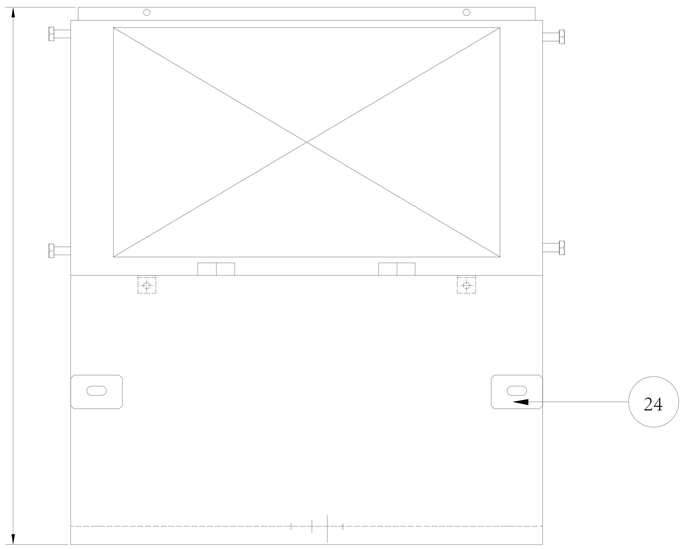


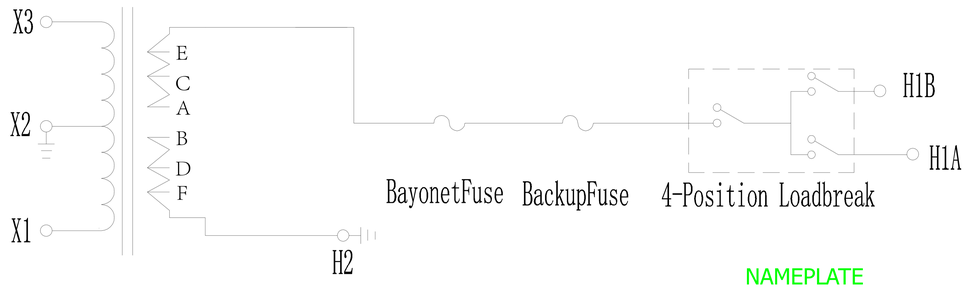


NAMEPLATE DETAIL

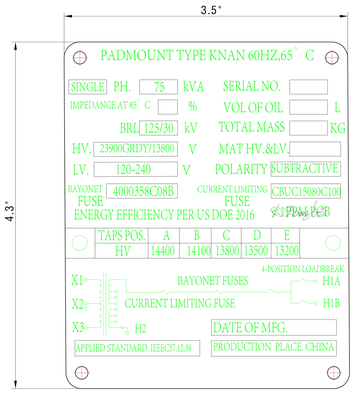


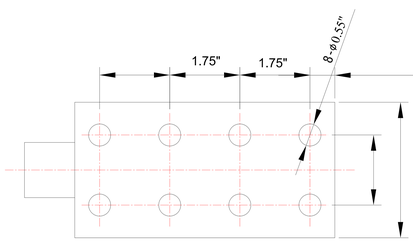


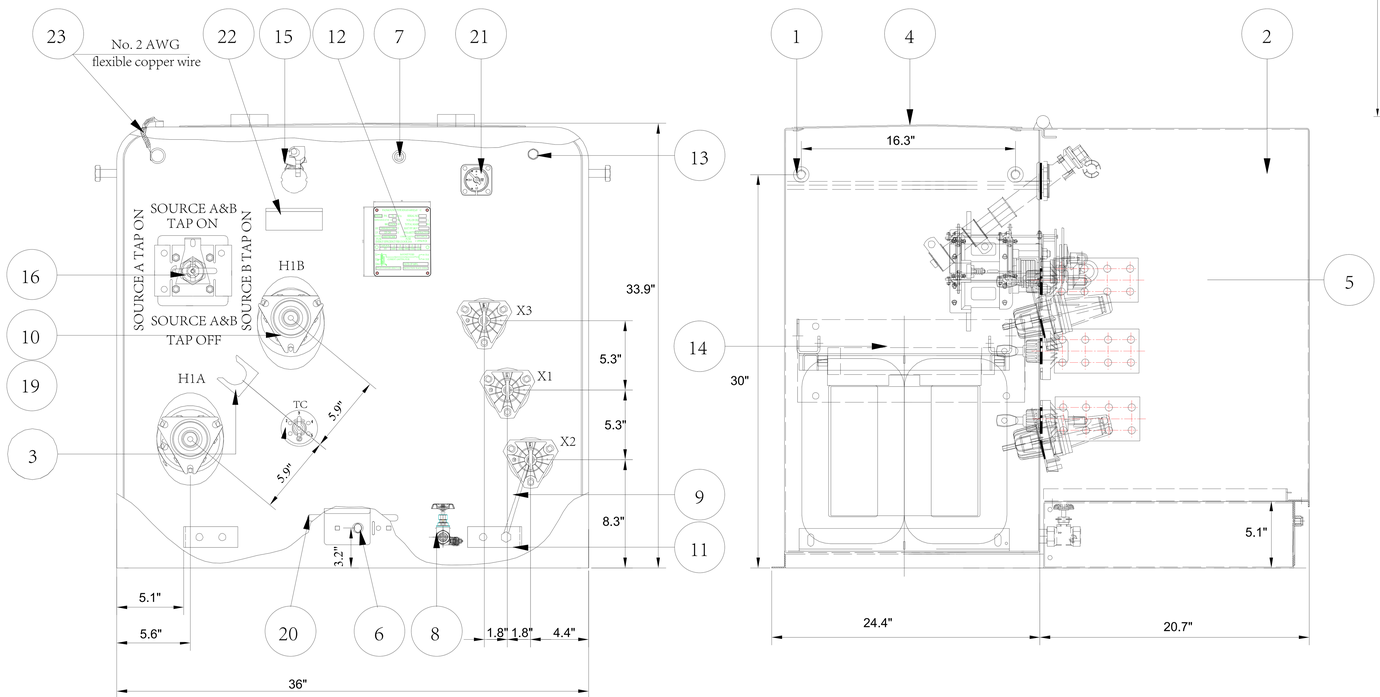


| PARTS LIST | | |
|---|---|---|
| ITEM | DESCRIPTION | QTY |
| 1 | BOLT FOR LIFTING(M20 ×65) | 4 |
| 2 | HINGED DOOR | 1 |
| 3 | PARKING STAND BRACKET | 1 |
| 4 | FLIP TOP COVER | 1 |
| 5 | LV BUSHING (1.2 kV 630A-4 Hole) | 3 |
| 6 | PENTAHEAD BOLT ARRANGEMENT(STAINLESS STEEL) | 1 |
| 7 | FILL PLUG | 1 |
| 8 | 1"DRAIN VALVE WITH 3/8" SAMPLER | 1 |
| 9 | GROUND STRAP COPPER | 1 |
| 10 | HV BUSHING WELL(25KV,200A) | 2 |
| 11 | GROUNDING SPADE TERMINAL | 2 |
| 12 | NAME PLATE(STAINLESS STEEL) | 1 |
| 13 | PRESSURE RELIEF VALVE | 1 |
| 14 | ELSP FUSE(CBUC15080C100) | 1 |
| 15 | BAYONET FUSE(4000358C08B) | 1 |
| 16 | FOUR POSITION LOADBREAKE SWITCH | 1 |
| 17 | | |
| 18 | TC | 1 |
| 19 | INSERT WITH DUST CAP (25KV,200A) | 2 |
| 20 | GROUNDING BRACKET | 1 |
| 21 | OIL LEVEL GAUGE | 1 |
| 22 | DRIP TRAY | 1 |
| 23 | EQUIPOTENTIAL DEVICE(COPPER) | 1 |
| 24 | CLAMP | 2 |

TYPE: ZGDL-H-75/23.9(13.8) /0.24(0.12)

DWG. NAME: General Assembly Drawing

| DRAWN | CHECKED | CHECKED | | APPROVED |
|---|---|---|---|---|
| | | | | |

FIRST ANGLE PROJECTION | SCALE 1

JIEZOU POWER

REV. NO. 0

CHANGE

NO.

DWG.