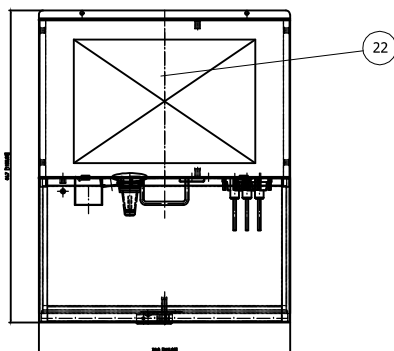
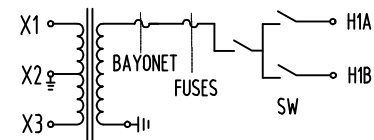

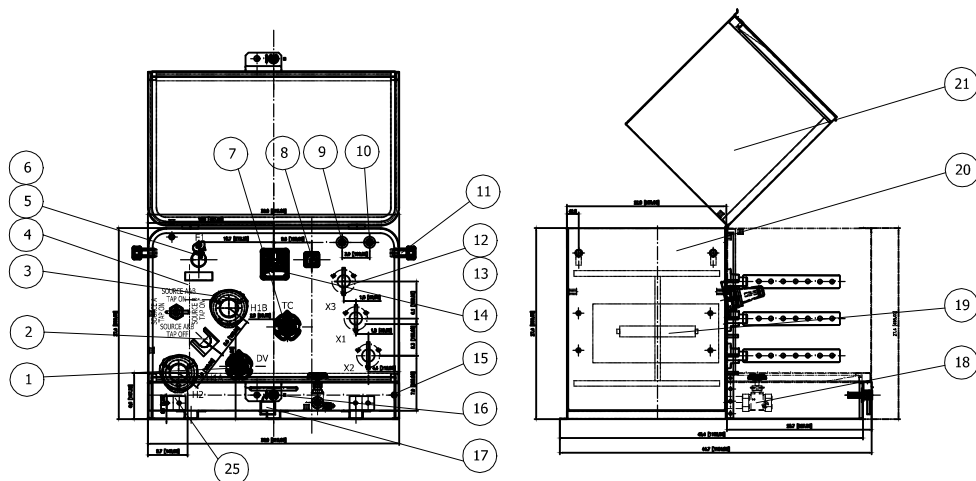
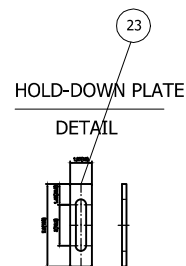
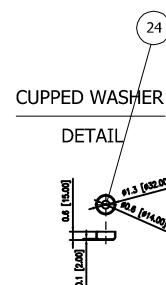


L.V. TERMINAL
DETAILHOLD-DOWN PLATE
DETAILCUPPED WASHER
DETAIL

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	4160GrdY/2400 x 14400GrdY/8320
SECONDARY VOLTAGE(V)	240/120
INSULATION LEVEL(KV) H.V BIL	95
INSULATION LEVEL(KV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	CU
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	98.84%
LOAD LOSS AT RATED VOLTAGE	800W
NO LOAD LOSSES	100 W
IMPEDANCE	>2.3%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	Munsell 4.82 G 4.07/3.35
POLARITY	POLARITY IS ADDITIVE
APPLIED STANDARD.	CSA.C227.3

ITEM	WEIGHT
TANK & ACCESSORIES	360 Lbs
TOTAL OIL WEIGHT	670 Lbs
TOTAL WEIGHT	1340 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	DOUBLE VOLTAGE SWITCH	1
2	PARKING STAND BRACKET	1
3	HV BUSHING (15kV, 200A)	2
4	FOUR POSITION LOADBREAKER SWITCH	1
5	BAY-O-NET SELECTION	1
6	FUSE HOLDER	1
7	TAP CHANGER 1PH	1
8	OIL LEVEL GAUGE	1
9	1" UPPER FILL VALVE	1
10	PRESSURE RELIEF VALVE	1
11	LIFTING LUG	4
12	LV BUSHING(1.2kV 5/8)	3
13	7 HOLE SPAD	3
14	NAMEPLATE	1
15	GROUND STEEL PADS (TTC2)	4
16	FIXED PROJECTING CUP	1
17	PADLOCK	1
18	1" DRAIN VALVE WITH 3/8" SAMPLER	1
19	CURRENT LIMITING FUSE	2
20	TANK	1
21	COVER	1
22	BOLT FOR LIFTING	1
23	HOLD-DOWN PLATE	4
24	CUPPED WASHER	4
25	GROUND PAD	2

TYPE				DWG. NAME	
ZGD-H-50/2.4-8.32				GENERAL ASSEMBLY DRAWING	
DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE 1
MIKE	WELLA	WIRIS	J	SAM	S
ZGD-H-50-230912-01				REV. NO.	

JZP
SINCE 1989 FROM USA

