

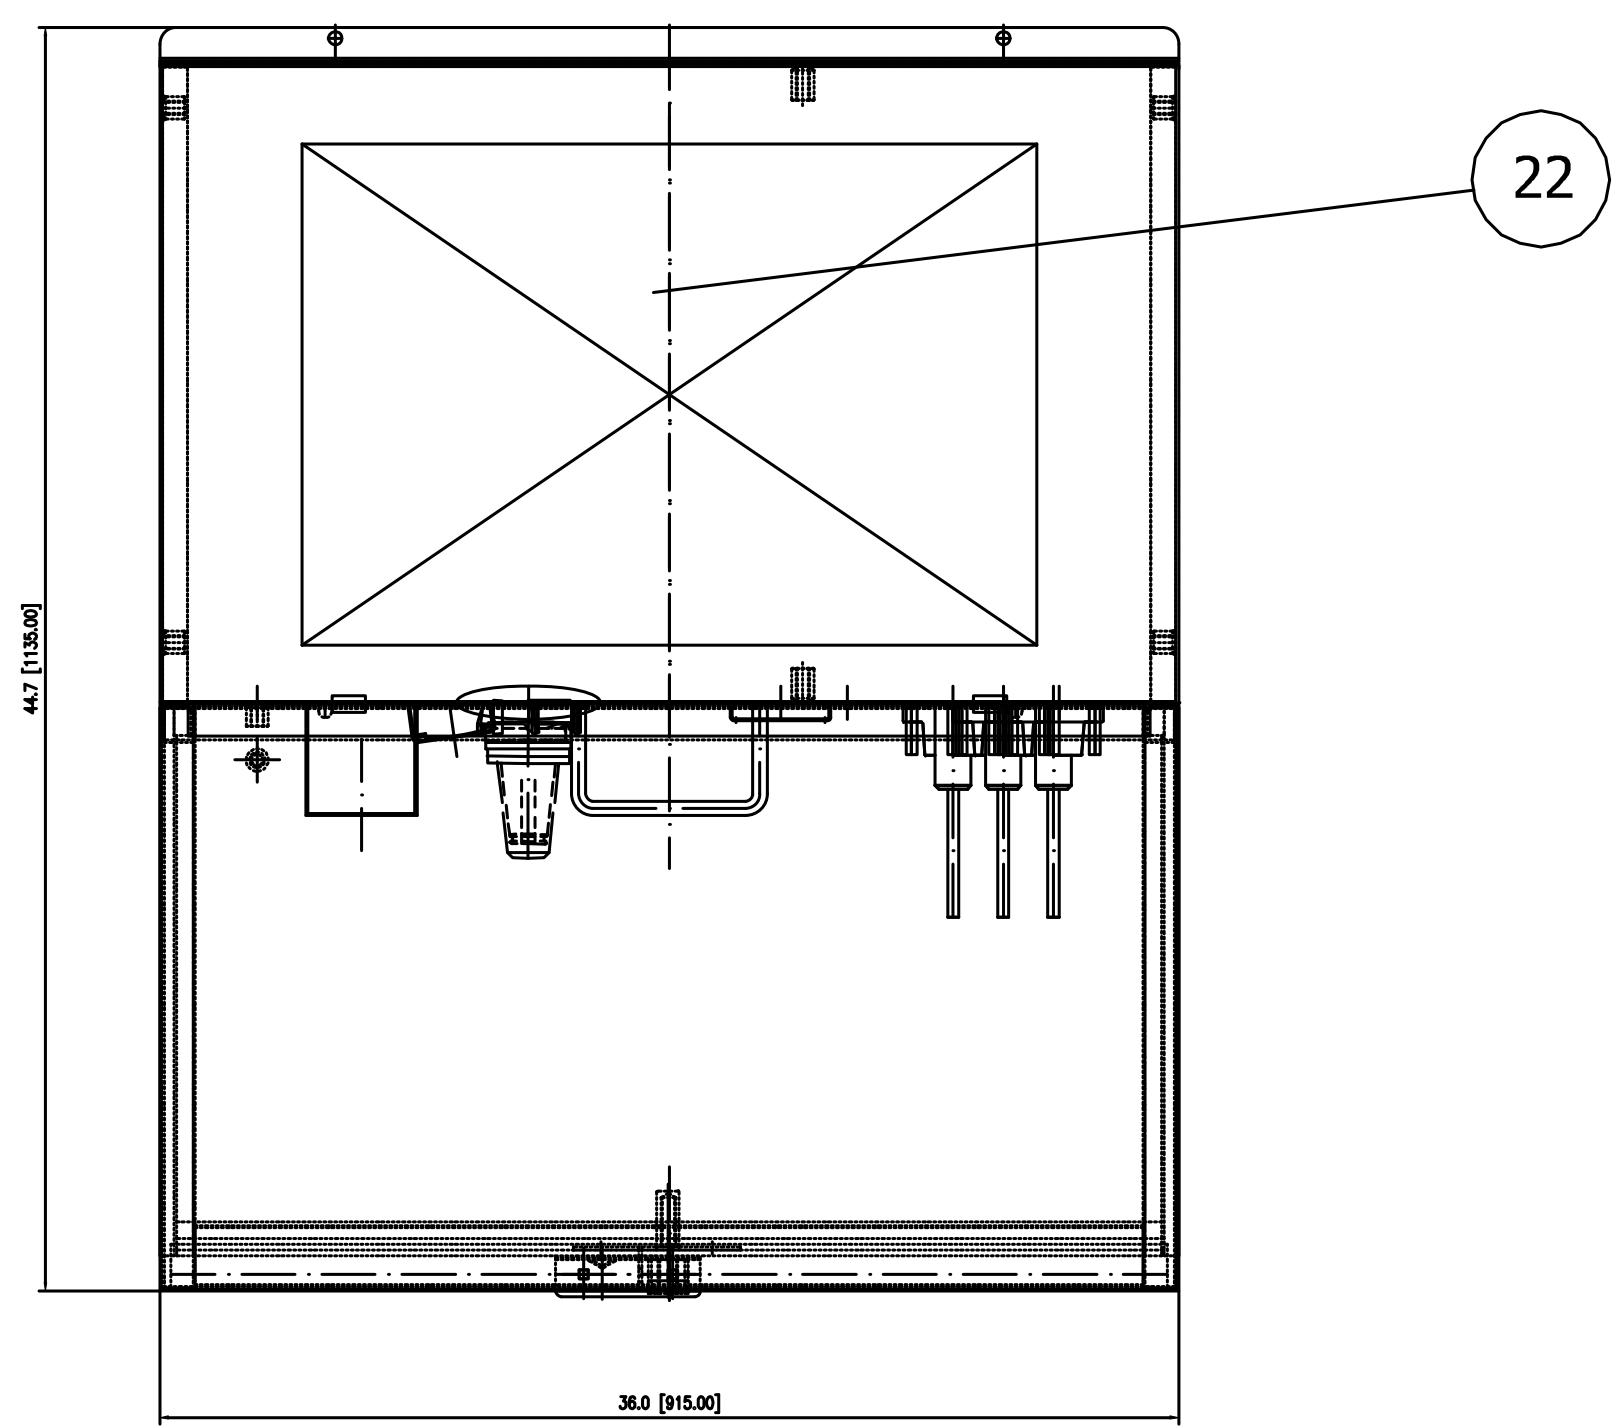
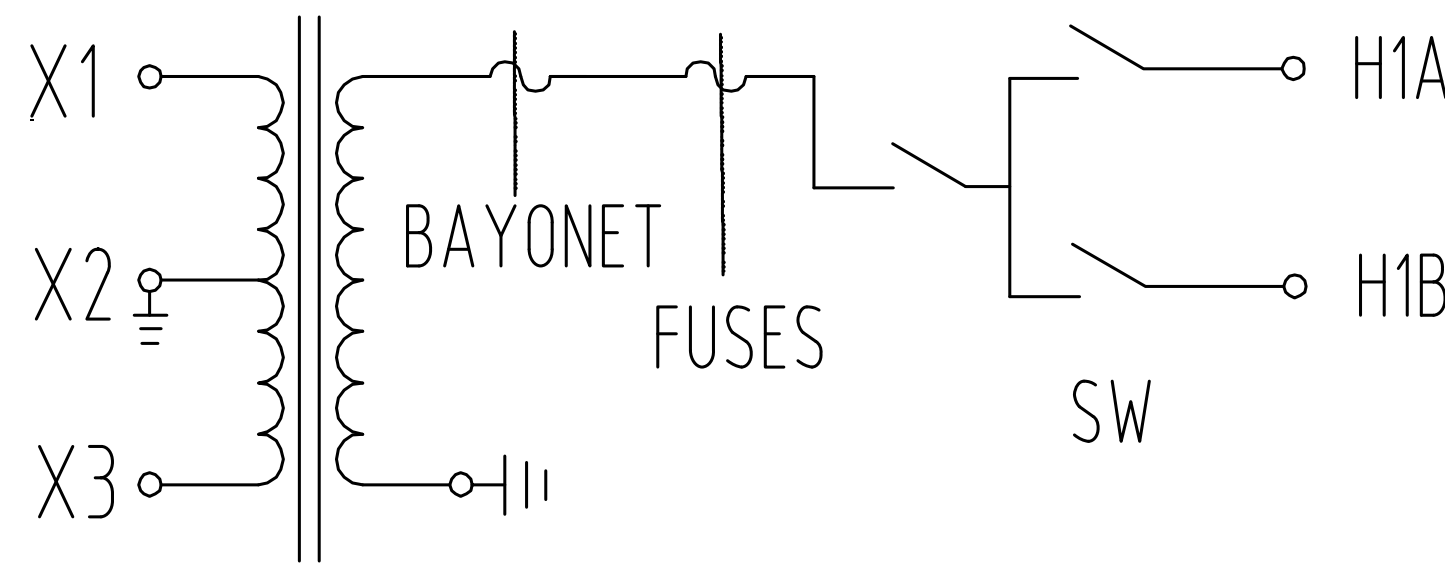
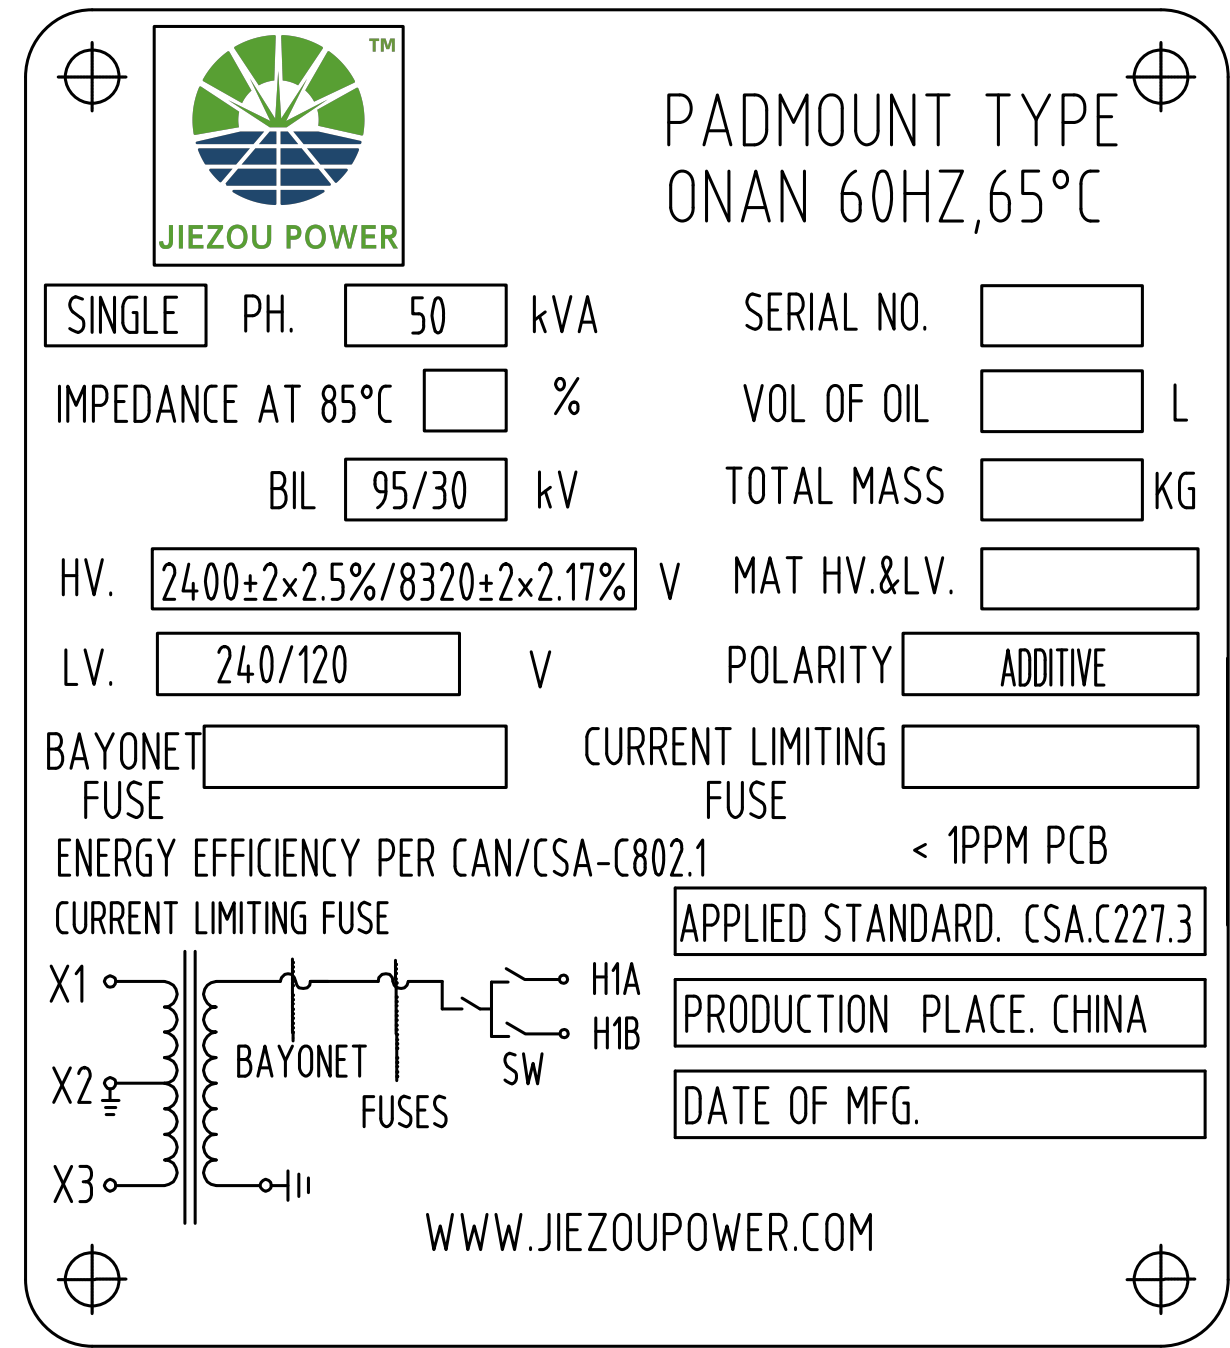
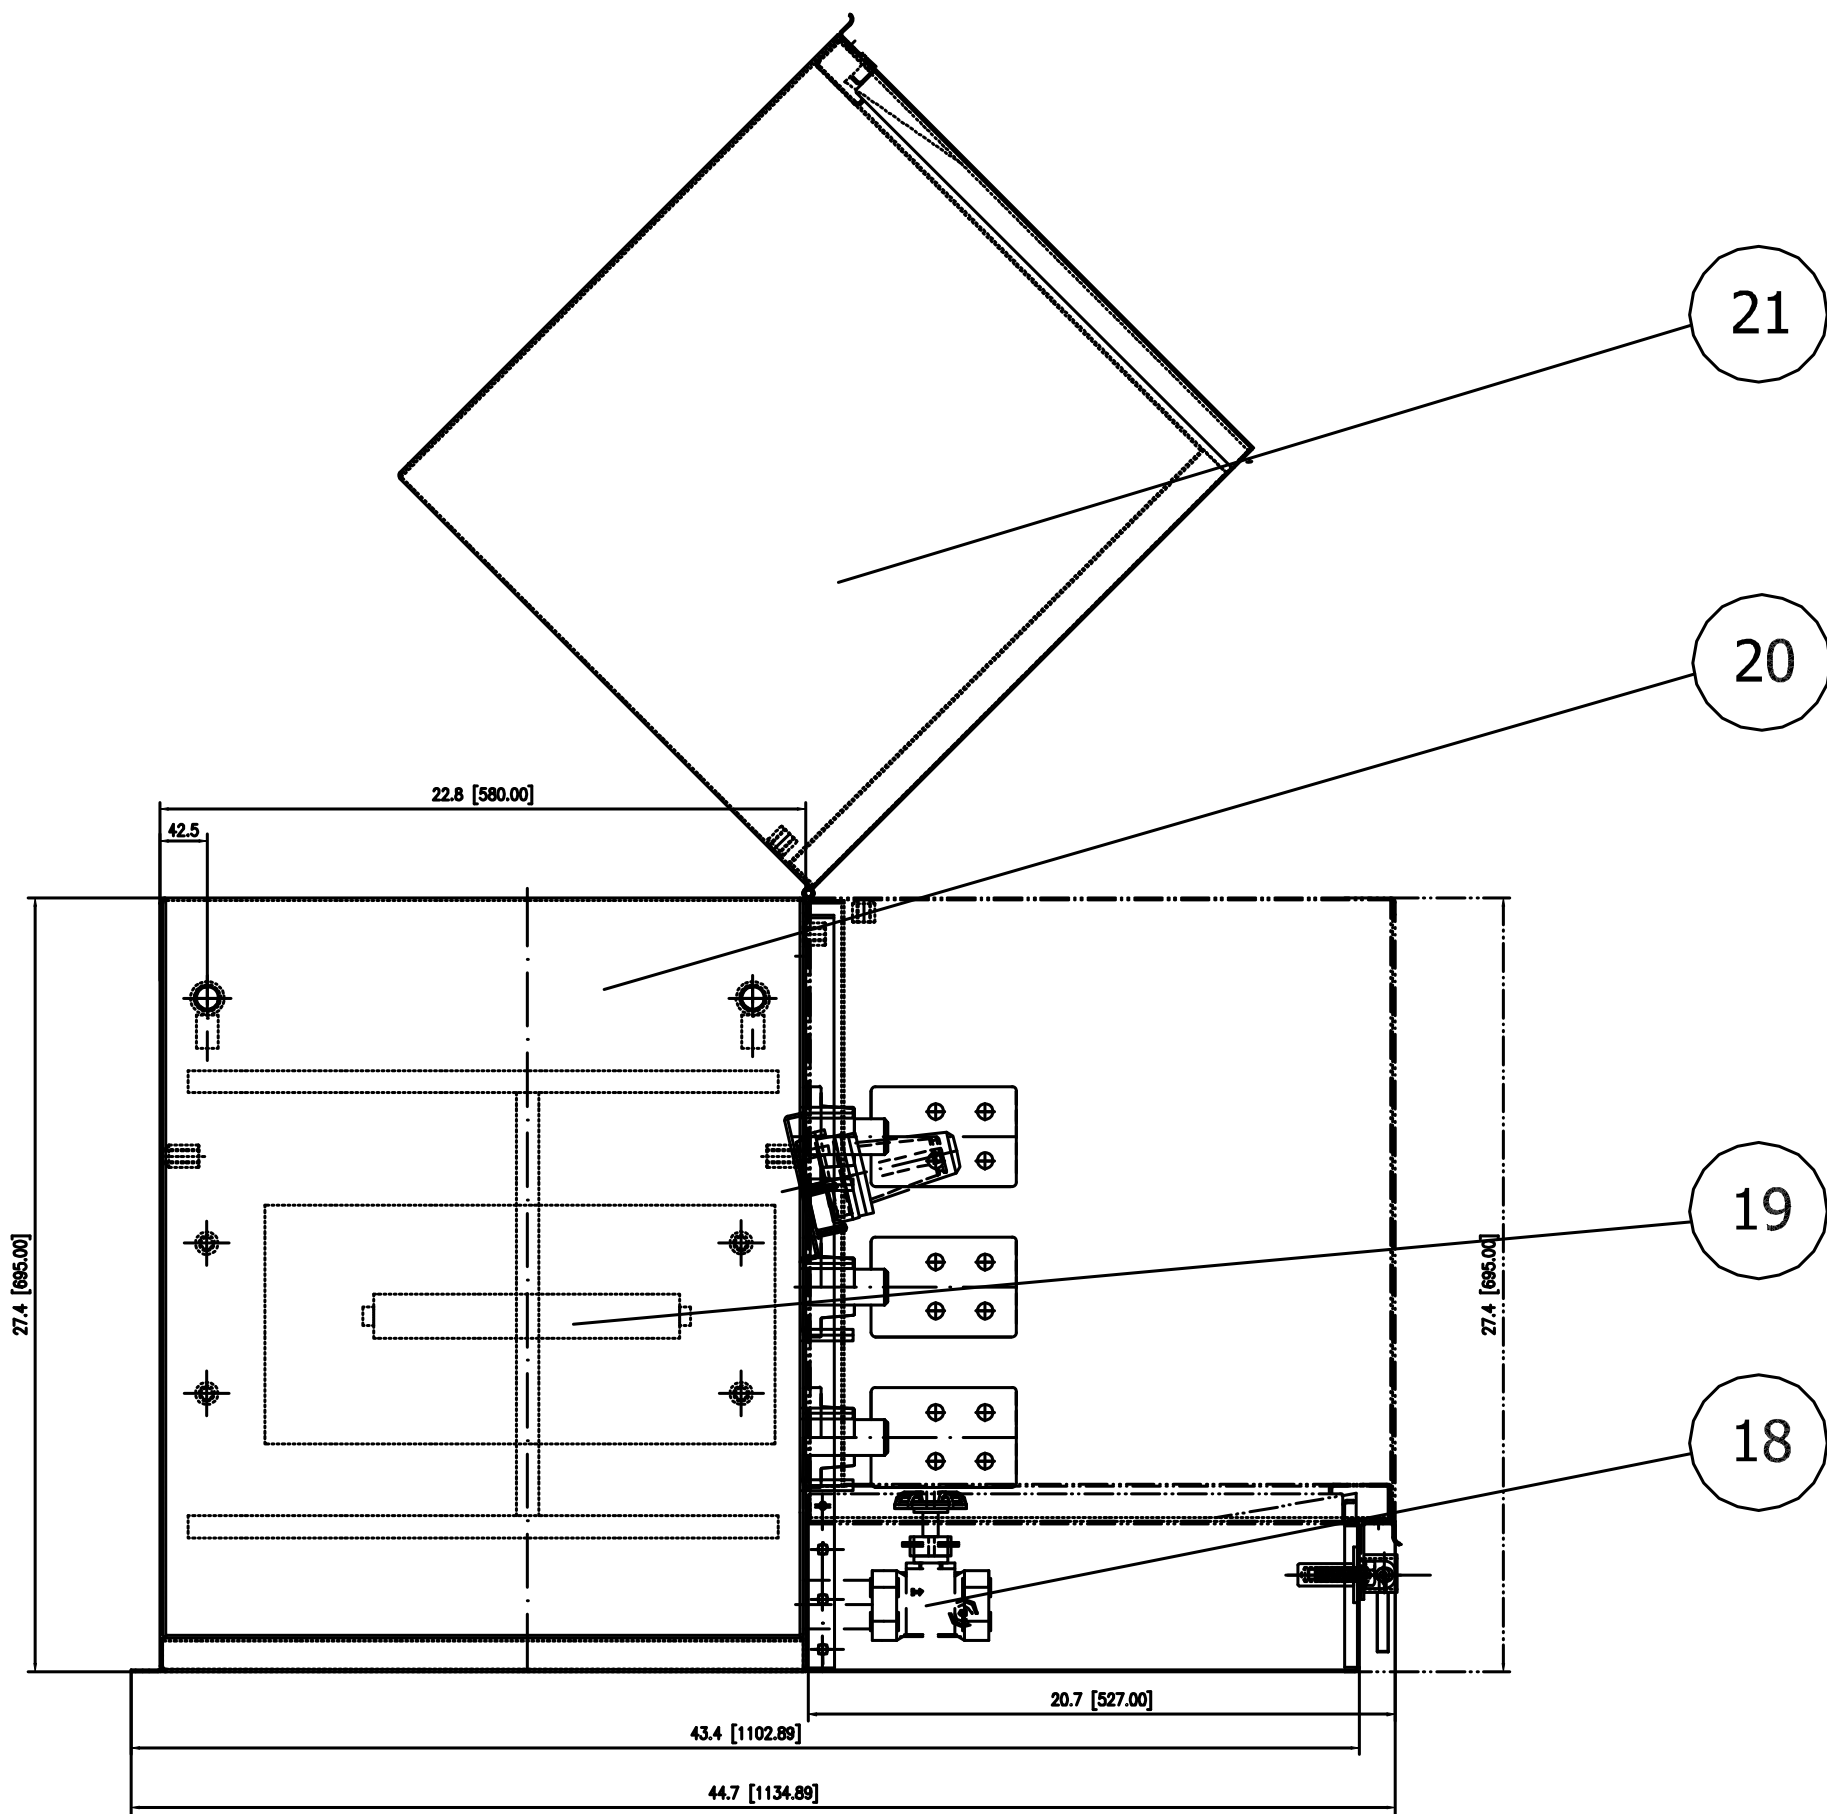


DWG. NO.


ZGD-H-50-230912-04

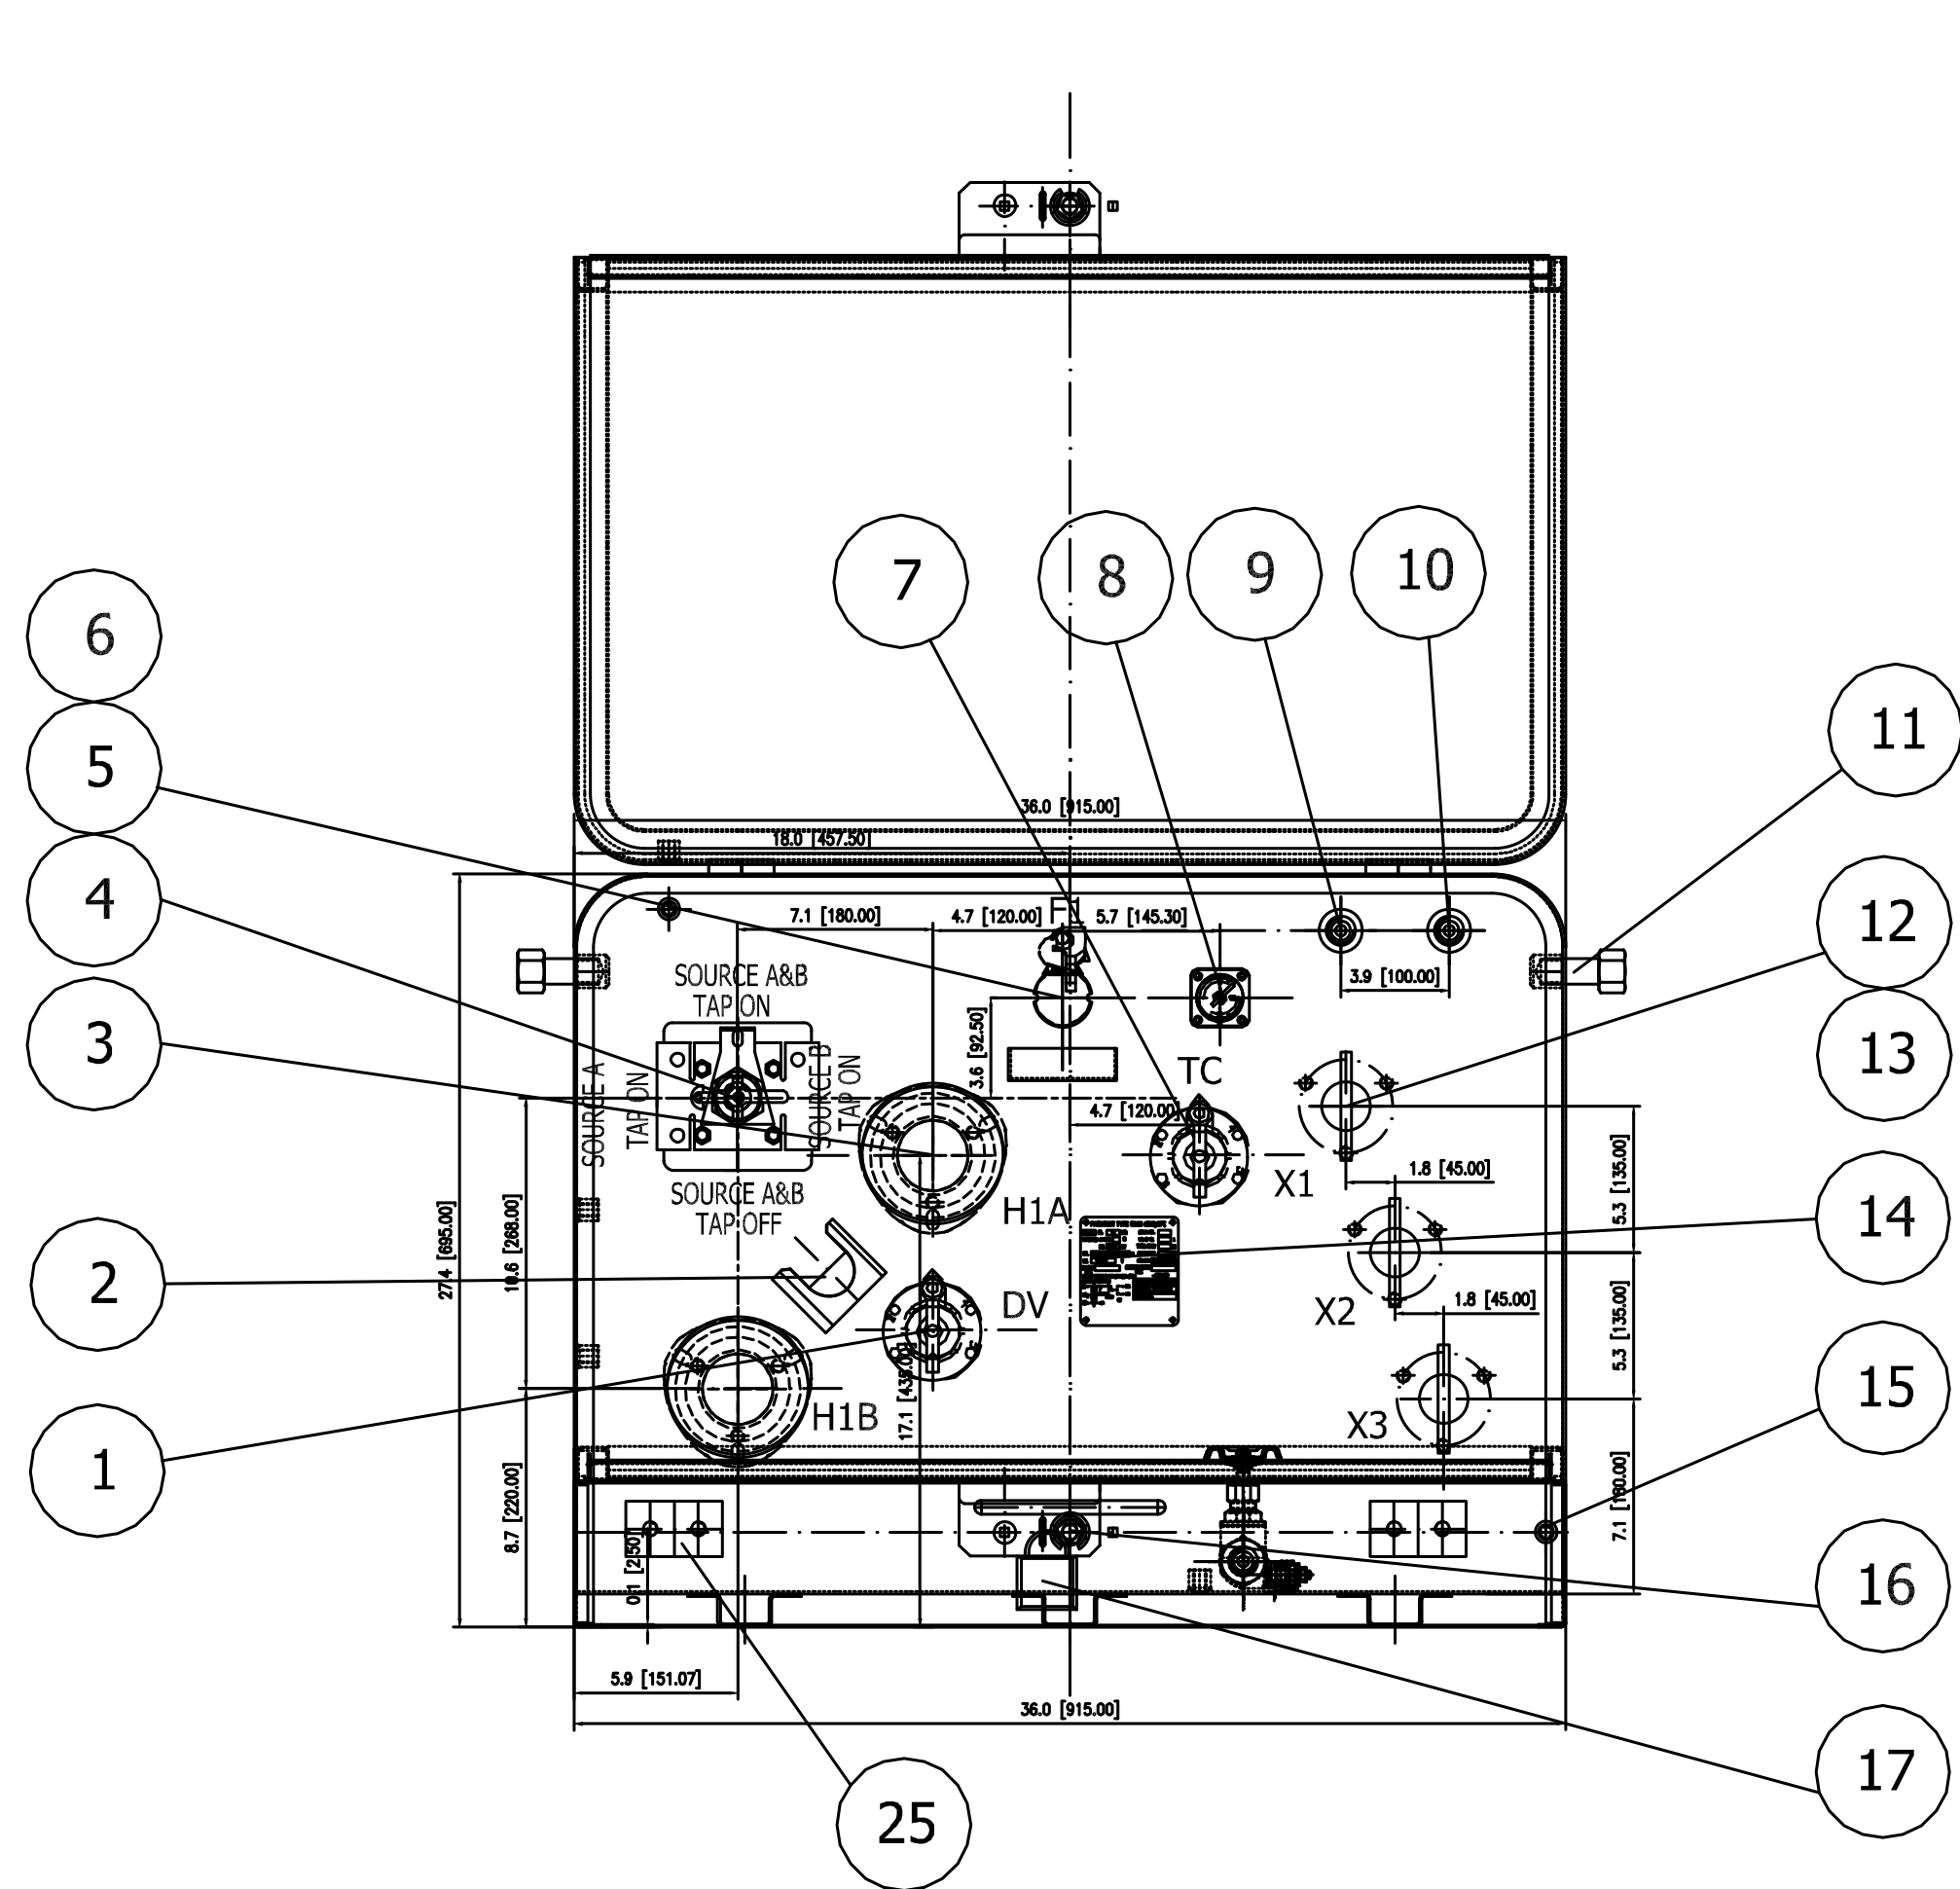


L.V. TERMINAL
DETAIL

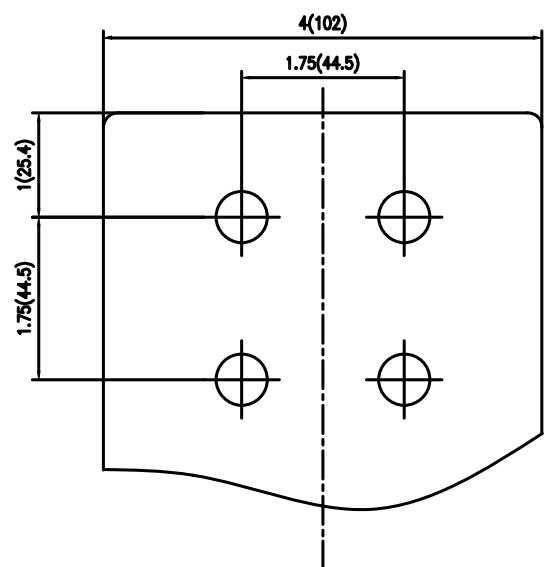

HOLD-DOWN PLATE
DETAIL

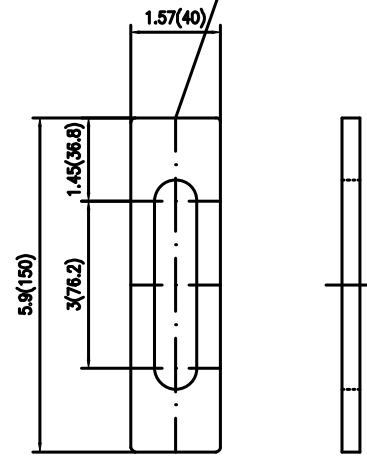

CUPPED WASHER
DETAIL

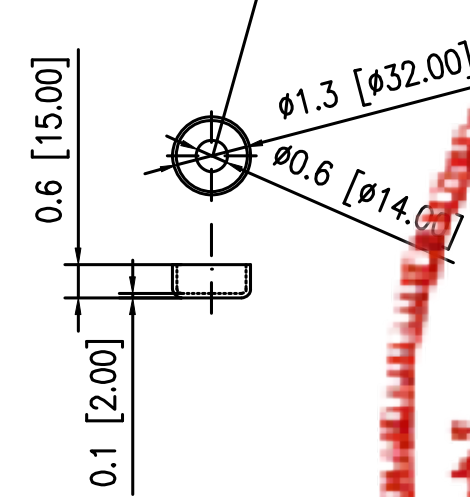

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	2400±2*2.5%/8320±2*2.17%
SECONDARY VOLTAGE(V)	240/120
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	CU
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	98.84%
LOAD LOSS AT RATED VOLTAGE	800W
NO LOAD LOSSES	100
IMPEDANCE	>2.3%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	Munsell 4.82 G 4.07/3.35
POLARITY	ADDITIVE
APPLIED STANDARD.	CSA.C227.3

ITEM	WEIGHT
TANK & ACCESSORIES	360 Lbs
TOTAL OIL WEIGHT	670 Lbs
TOTAL WEIGHT	1340 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	DOUBLE VOLTAGE SWITCH	1
2	PARKING STAND BRACKET	1
3	HV BUSHING (15kV,200A)	2
4	FOUR POSITION LOADBREAKE SWITCH	1
5	BAY-O-NET SELECTION	1
6	FUSE HOLDER	1
7	TAP CHANGER 1PH	1
8	OIL LEVEL GAUGE	1
9	1" UPPER FILL VALVE	1
10	PRESSURE RELIEF VALVE	1
11	LIFTING LUG	4
12	LV BUSHING(1.2kV 5/8)	3
13	4 HOLE SPAD	3
14	NAMEPLATE	1
15	GROUND STEEL PADS (TTC2)	4
16	FIXED PROJECTING CUP	1
17	PADLOCK	1
18	1"DRAIN VALVE WITH 3/8" SAMPLER	1
19	CURRENT LIMITING FUSE	2
20	TANK	1
21	COVER	1
22	BOLT FOR LIFTING	1
23	HOLD-DOWN PLATE	4
24	CUPPED WASHER	4
25	GROUND PAD	2

TYPE ZGD-H-50/2.4-8.32/0.24(0.12)					DWG. NAME GENERAL ASSEMBLY DRAWING			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike W	Ella W	Iris J		Sam	 JIEZOU POWER			REV. NO.
ZGD-H-50-230912-04								