

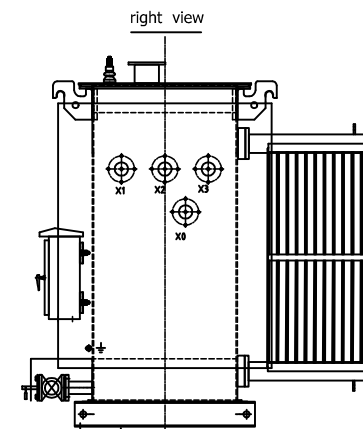


CHANGE

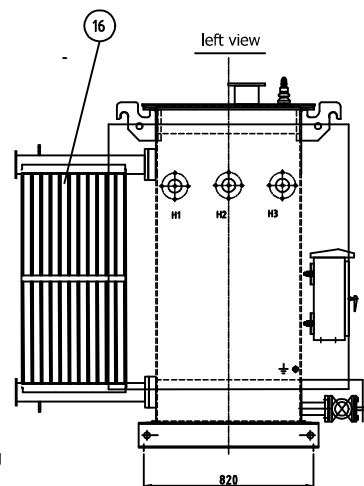

TECHNICAL DATA		
RATING	500kVA	
PRIMARY VOLTAGE	25000V	
SECONDARY VOLTAGE	14400V	
FREQUENCY	60Hz	
VECTOR GROUP	Dy1	
WINDING MATERIAL	COPPER	
LOAD LOSS AT RATED VOLTAGE	6800W Tol +0%	
NO LOAD LOSSES	1900W Tol +0%	
IMPEDANCE	7.0% Tol±10%	
ALTITUDE	≤1000m	
No. OF TAPPOSITION	5	
COLOR	ANSI 61 GREY	
CORE FORM	THREE-PHASE THREE COLUMN	
PRIMARY CURRENT TRANSFORMER	100:5A C200	3
SECONDARY CURRENT TRANSFORMER	200:5A C200	3

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HV LIGHTING PROTECTION BUSHING	3
2		3
3		3
4	EARTHING NUT	4
5	LV BUSHING	4
6		4
7	PRIMARY TERMINAL BOX	1
8	OIL THERMOMETER (BWY-803A)	1
9	WINDING THERMOMETER	1
10	CT TERMINAL BOX	1
11	OIL-LEVEL INDICATOR (YZF-90)	1
12	PRESSURE RELIEF DEVICE (YZF-35/25KJ)	1
13	VACUUM MANOMETER	1
14	TAP CHANGER (WSLII3-63/35-6×5)	1
15	SECONDARY TERMINAL BOX	1
16	RADIATORS(PC1000-12/520)	1
17	OIL DRAIN VALVE (DN25)	1
18	GROUND STAINLESS STEEL	3
19	TANK AND COVER ASSEMBLY	1
20	OIL FILL VALVE	1
21	STAINLESS STEEL JUNCTION BOX, PADLOCK LOCKABLE IP56 Equivalent to NEMA 4X	1
22	SCREW CONNECTED BUSING	2

TYPE				DWG. NAME			
S-500/25				General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
X.K.Jin	H.H.Xu	H.J.Qiao		D.J.Mei			REV NO
1.710.XXX.1							4