

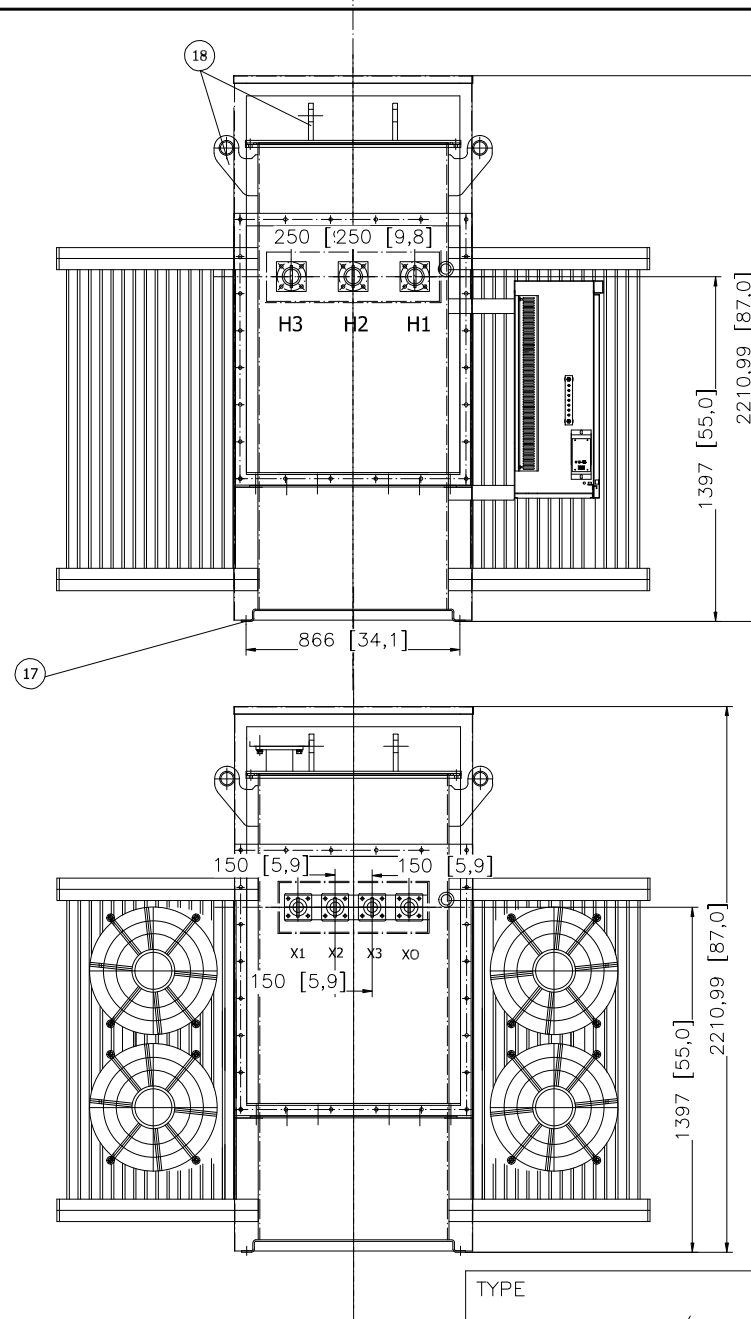
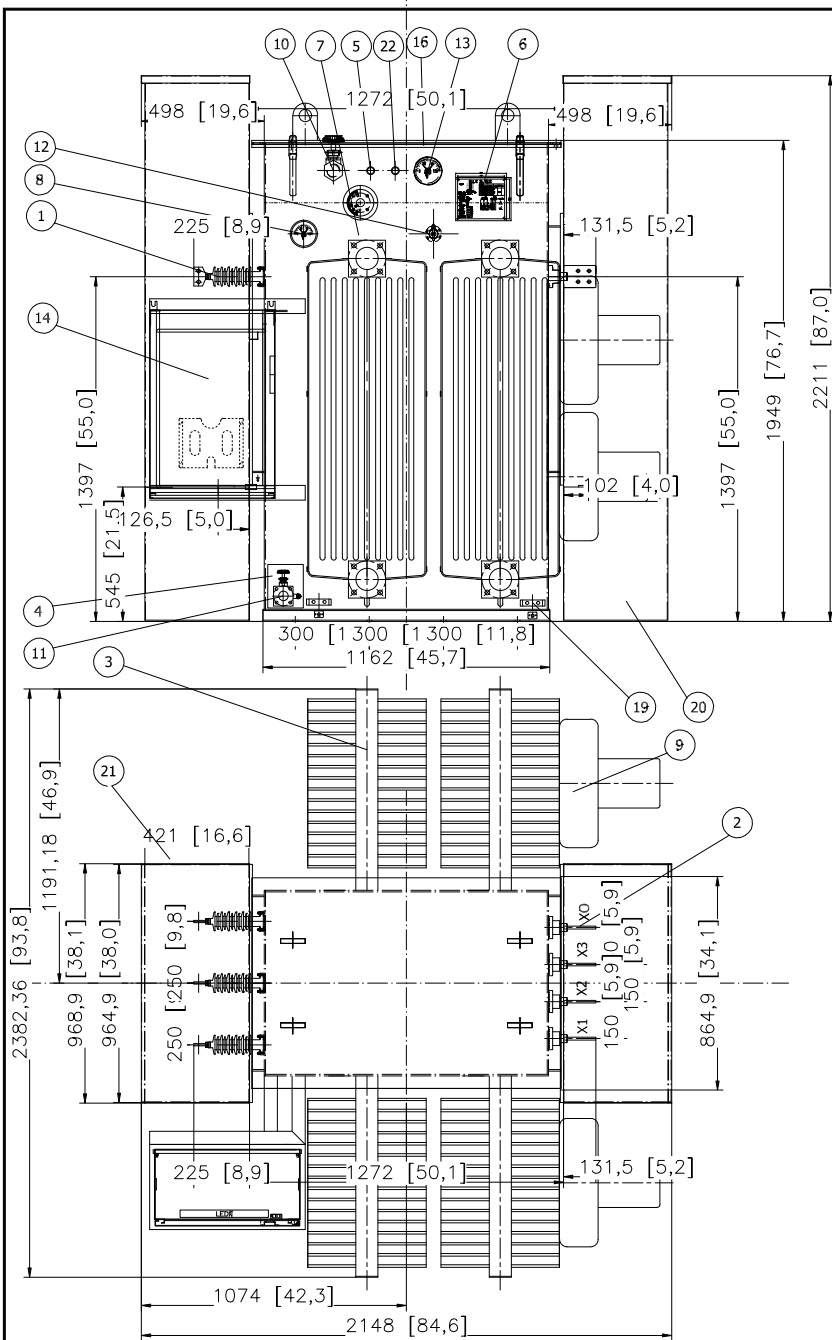


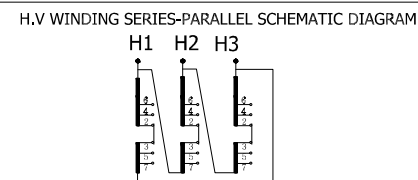

TECHNICAL DATA	
RATING	1300/1500kVA
PRIMARY VOLTAGE	13200V
SECONDARY VOLTAGE	550V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	AL
LOAD LOSS AT RATED VOLTAGE	10700W
NO LOAD LOSSES	1400W
IMPEDANCE(KNAN)	5.65%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	ANSI-70

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HV BUSHING (15KV 417A)	3
2	LV BUSHING (1.2KV 2000A)	4
3	RADIATORS(PJ1300-16/480)	4
4	PROTECTIVE COVER WITH LOCK	1
5	PRESSURE RELIEF DEVICE	1
6	NAME PLATE.	1
7	LIQUID LEVEL INDICATOR	1
8	LIQUID TEMPERATURE INDICATOR	1
9	FANS	2
10	OIL FILL VALVE	1
11	DRAIN VALVE WITH SAMPLING DEVICE	1
12	TAP CHANGER,125/15-6×5	1
13	VACUUM PRESSURE GAUGE	1
14	AIR COOLING CONTROL BOX	1
15	THROAT FLANGE,H.V	1
16	TANK AND COVER ASSEMBLY	1
17	BASE WELDED TO TANK	1
18	LIFTING EYE FOR ACTIVE PART WITH TANK COVER	4
19	GROUND PAD ON TANK WALL	2
20	LOW VOLTAGE CABLE BOX	1
21	HIGH VOLTAGE CABLE BOX	1
22	PRESSURE VACUUM GAUDE AND AIR TEST VALVE	1

L.V WINDING SERIES-PARALLEL SCHEMATIC DIAGRAM	
ITEM	WEIGHT(Kg)
TANK & ACCESORIES	1800
TOTAL OIL WEIGHT	980
TOTAL WEIGHT	4500



TYPE 1500KVA,13.2/0.55kv				DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
Mike	Iris	Jack		Sam			
JZP.3ST.01500.13200						REV. NO.	