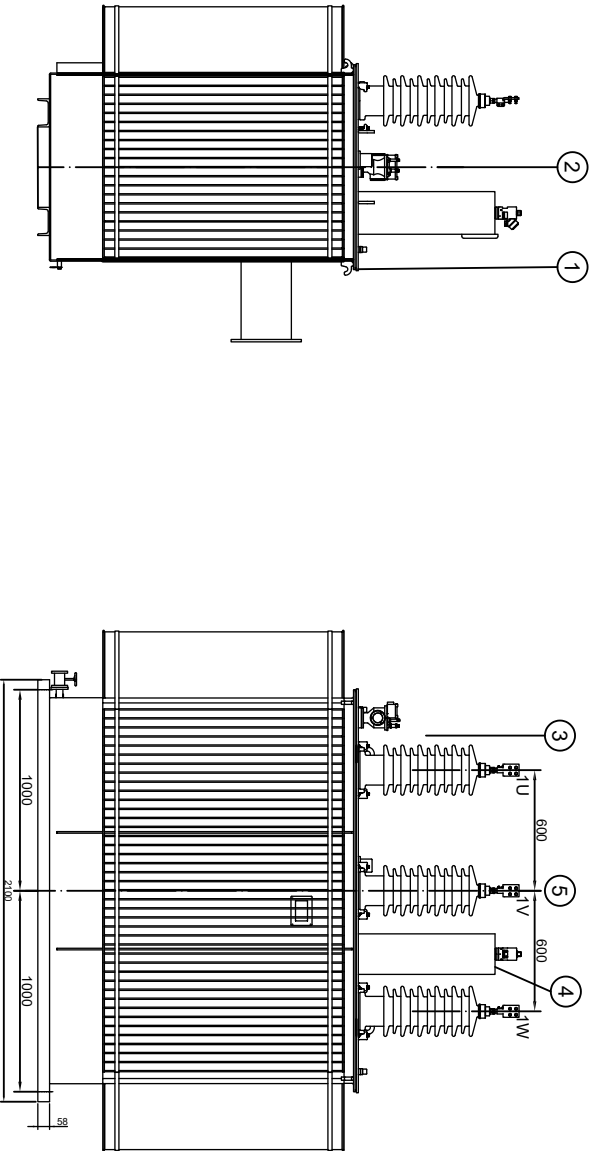
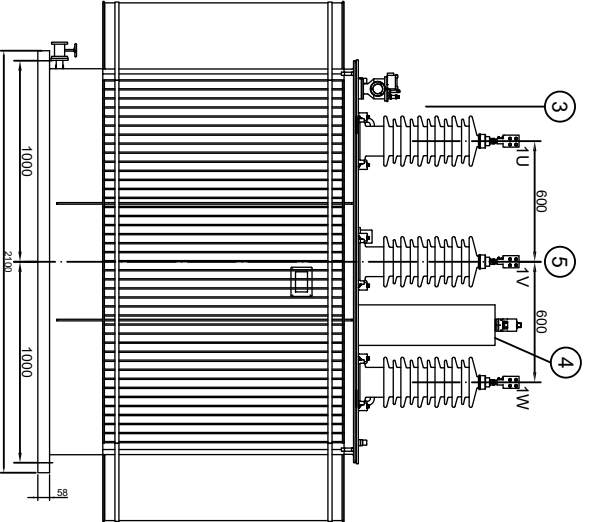
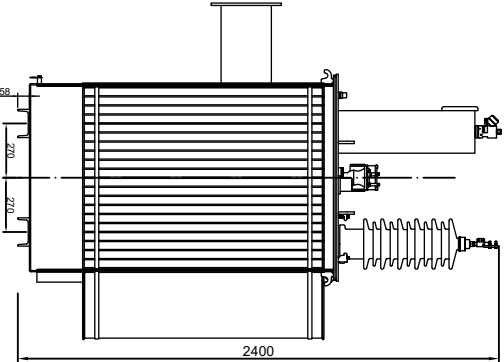
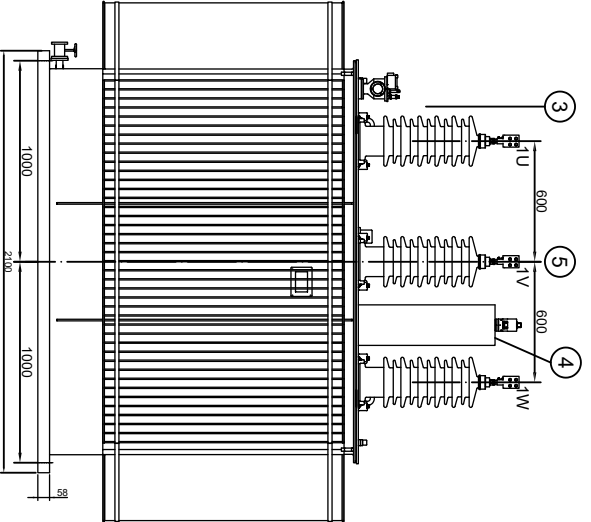
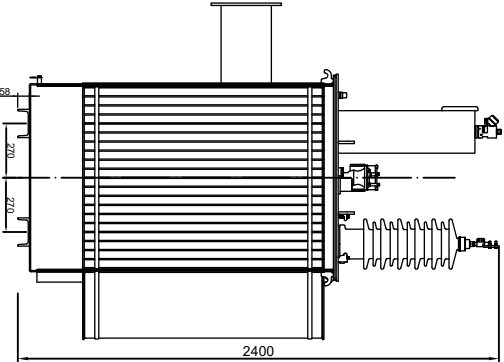
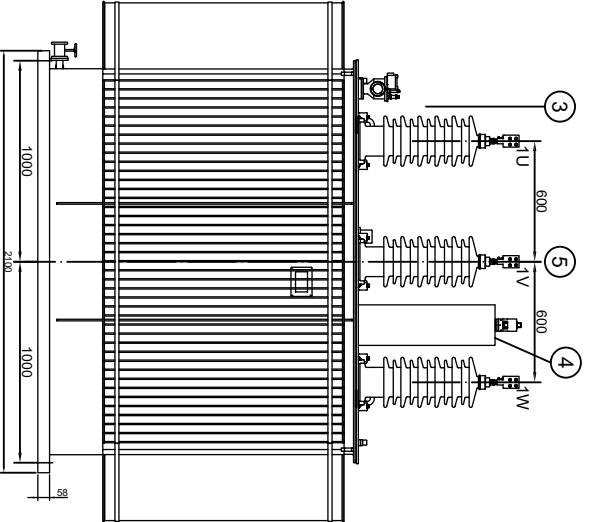
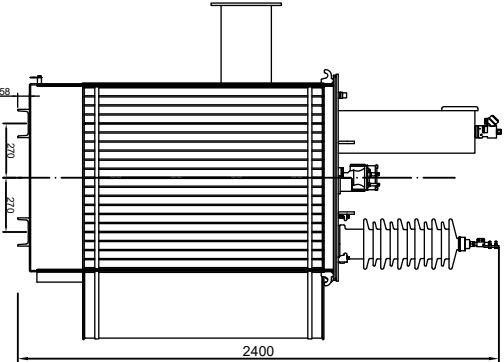
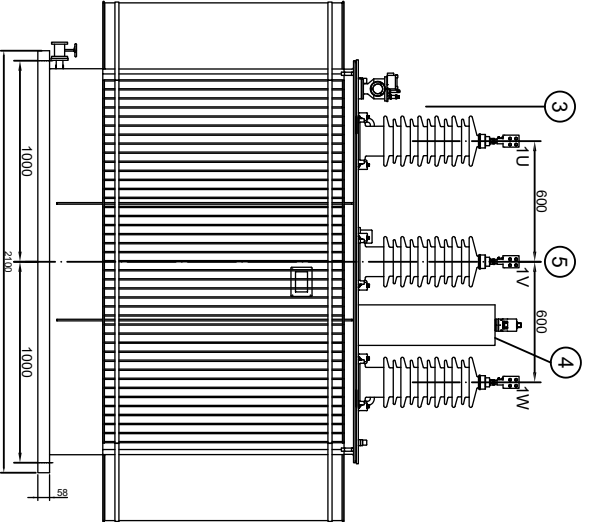
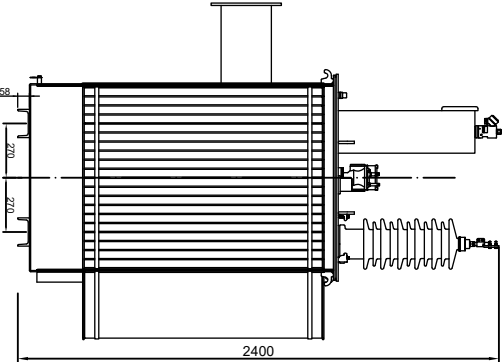
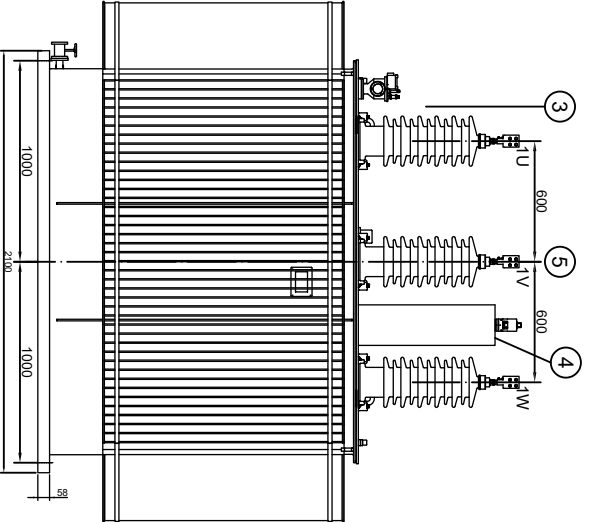
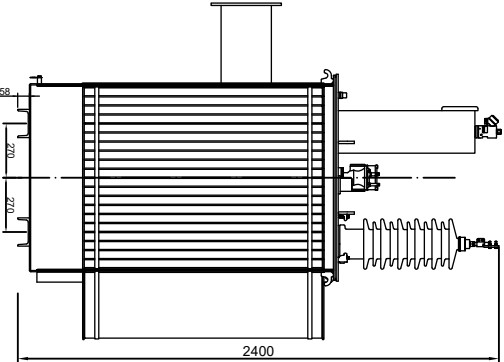
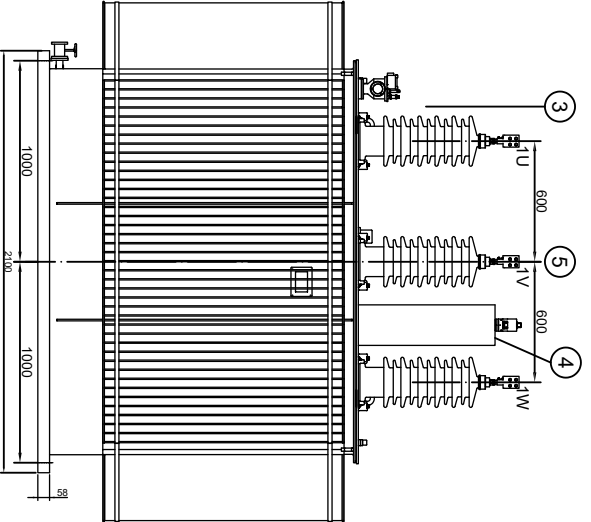
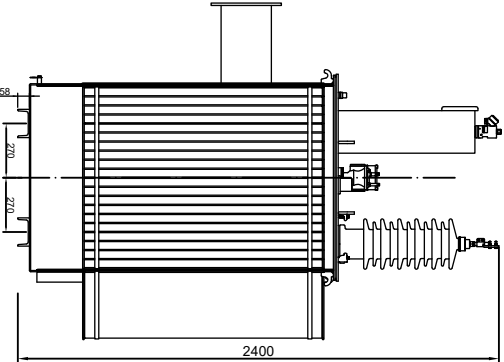
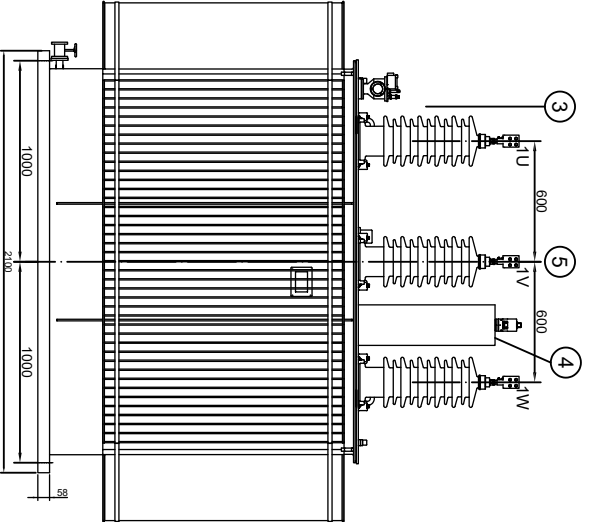
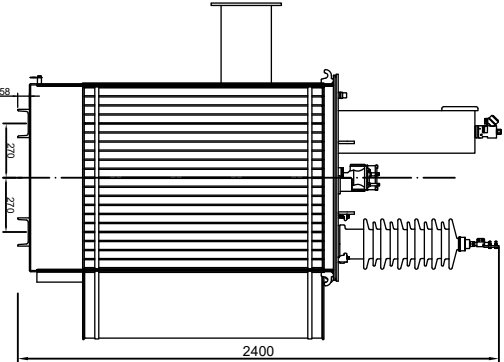
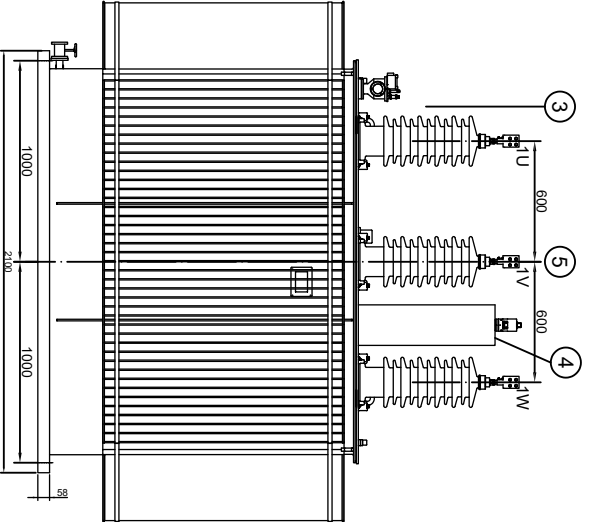
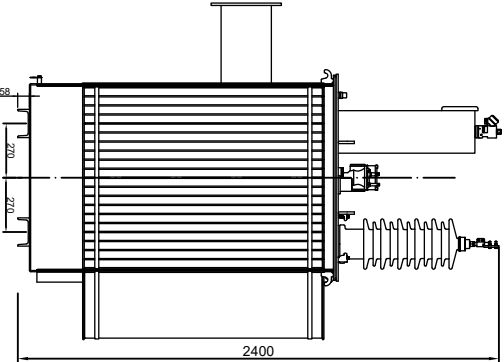
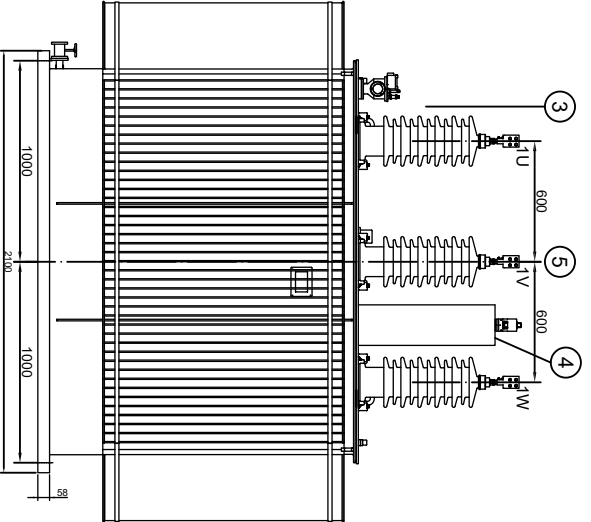
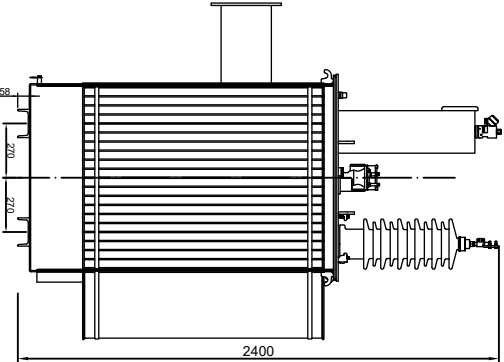
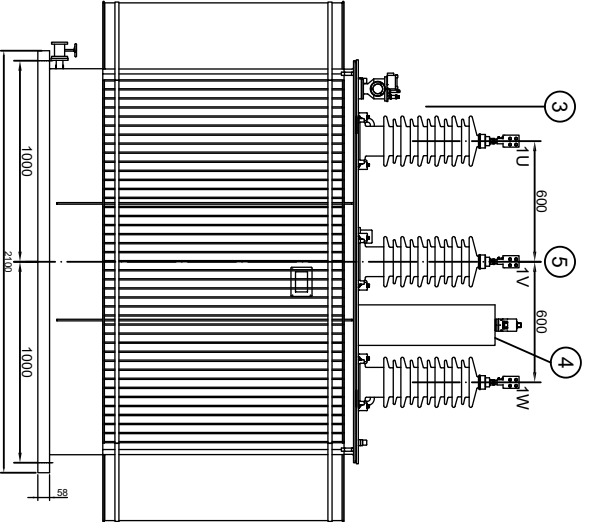
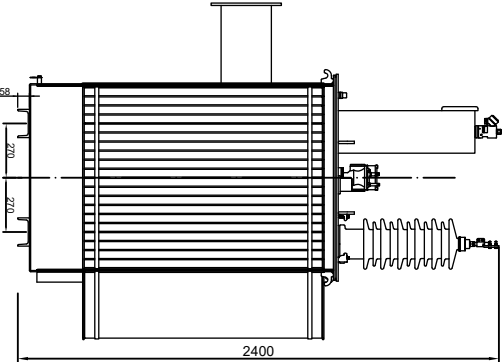
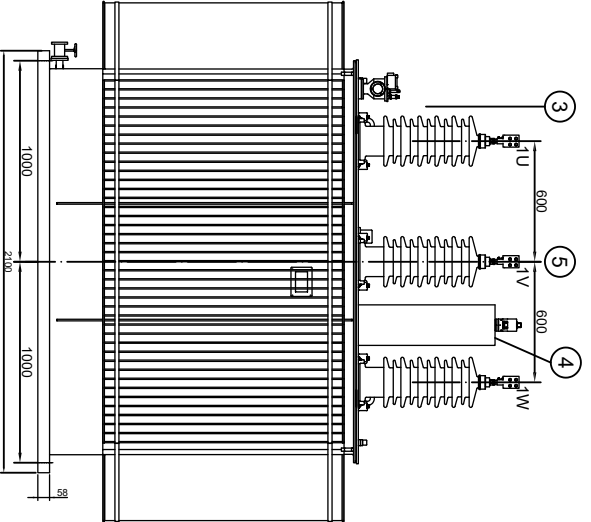
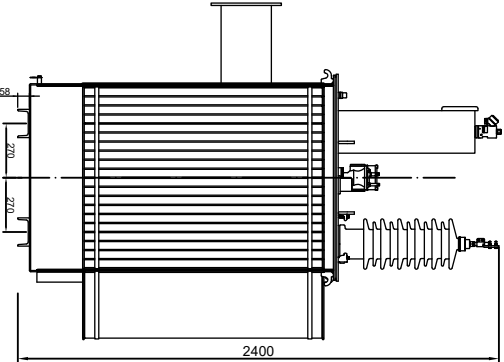


1				7		8	
A				secondary terminal material: Copper primary terminal material: Copper		REV. C B A DATA DESCRIPTION ARROVED	
							
							
							
B							
C							
D							
							
							
							
E							
F							

Tap	Voltage	Amps	Connections
1	39900	36.17	
2	38950	37.06	
3	38000	37.98	
4	37050	38.96	
5	36100	39.98	

Standards ANSI/IEEE C57.12.10-2010





Rated power	2500	kVA	Frequency	60	Hz
Rated Primary voltage	38	kV	Impedance	7	%
Rated secondary voltage	0.48	kV	Weight	7060	kg
Off-Load Tapping on HV Coil	±2x2.5	%	Phase	3	
Winding Material (HV/LV)	AL/AL	Vector group		Dyn1	
Climatic Class	C2	Type of cooling		AN	
Environmental Class	E1	Insulation class		A	
Fire Behaviour Class	F1	Protection Class		IP56	

Power Frequency Withstand Voltage (HVLV)	70/3	kV		
Lightning Impulse Withstand Voltage (HV/LV)	250/30	kV		
Oil Temp. Rise		55	K	
Average Winding Temp. Rise (HV/LV)		65	K	

CLIENT	
--------	--

MANUFACTURER	
--------------	--

DWG NO:			2500kVA, 38/0.48kV Oil-immersed distribution transformer outline drawings		
TITLE					
DRAWN			CHECKED	APPROVED	DATA
6	4	LV bushing (epoxy)			
5	3	HV bushing (porcelain)			
4	1	Tubular oil level gauge			
3	1	Buchholz			
2	1	HV taps			2025/1/17
1	4	Lifting lug	SCALE	SIZE	REV
Item	QTY	Description	Reference	1:1	A3
					A
					1 of 1

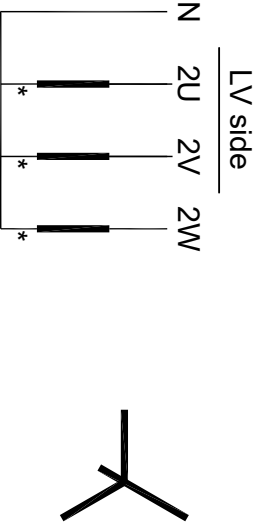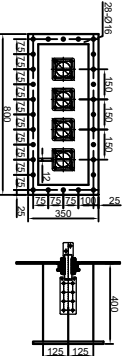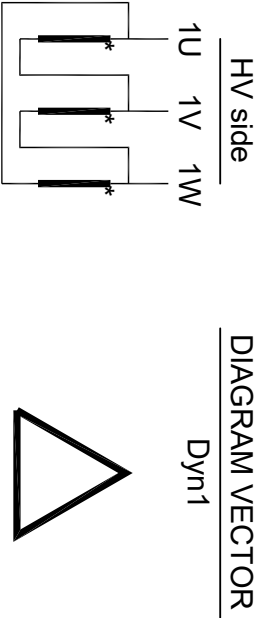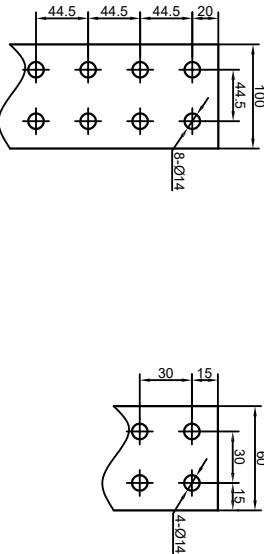

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---