
Components

Round Body Air Cylinder

Single-Acting, Push Style, 7/16" Bore Size, 1" Stroke

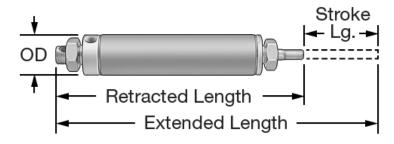

Each In stock \$25.86 Each 6498K512

1 added to your order 10/02/17.

| Motion | Linear |
|-------------------------------------|--|
| Air Actuator Type | Air Cylinder |
| Linear Air Cylinder Type | Round Body |
| Mount Type | Universal Mount |
| Mounting Orientation | Any |
| Bore Size | 7/16" |
| OD | 1/2" |
| Stroke Length | 1" |
| Force @ 50 psi | 8 lbs. |
| Force @ 100 psi | 15 lbs. |
| Force @ 150 psi | 22.5 lbs. |
| Force @ 200 psi | 30 lbs. |
| Sensor Ready | Not Sensor Ready |
| Air Cushion Type | No Cushion |
| Actuation Style | Single Acting |
| Body Material | 304 Stainless Steel |
| End Cap Construction | Double Rolled |
| Included Component | Mounting Nuts, Pivot Bushing, Pivot Pin, Retaining Rings |
| Number of Mounting Nuts Included | 2 |
| Mounting Nut Material | Carbon Steel |
| Rod | |
| Material | 303 Stainless Steel |
| Diameter | 0.19" |
| End Type | Threaded |
| Thread Size | 10-32 |
| Air Inlet | |
| Thread Size | 10-32 |
| Thread Type | UNF |

Components cont.

Ball Joint Rod End, 10-32 Thread



Shank Thread Direction Left Hand



ADD TO ORDER

In stock \$3.32 Each 60645K31


1 added to your order 10/04/17.

| Shank Thread Size | 10-32 |
|-----------------------------|----------------------------|
| ID | 3/16" |
| ID Tolerance | -0.0005" to 0.0025" |
| Maximum Ball Swivel | 20° |
| Overall Width | 5/8" |
| Overall Thickness | 5/16" |
| Shank Center Length | 1 1/16" |
| Shank Thread Length | 1/2" |
| Static Radial Load Capacity | 2,050 lbs. |
| Material | Zinc-Plated Carbon Steel |
| Ball Material | Chrome-Plated Bearing Stee |
| Lubrication | Required |
| Rod End Type | Ball Joint |
| Shank Threading | Fully Threaded |
| Shank Gender | Female |
| Shank Thread Direction | Left Hand |
| RoHS | Compliant |
| | |

Components cont.

High-Pull Rare Earth Magnetic Disc

with Countersunk Mounting Hole, 7/8" Diameter





1 added to your order 10/02/17.

| Thickness | 1/8" |
|---------------------------------------|--|
| Diameter | 7/8" |
| Maximum Pull | 8 lbs. |
| Number of Faces with Holding Power | 2 |
| Thickness Tolerance | -0.004" to 0.004" |
| Diameter Tolerance | -0.004" to 0.004" |
| Min. Temperature | Not Rated |
| Maximum Temperature | 170° F |
| Machinable | No |
| Material | Nickel-Plated Neodymium |
| Grade | N35 |
| Color | Silver |
| Mount Type | Unthreaded Hole |
| Mounting Fasteners Included | No |
| Number of Mounting Holes | 1 |
| For Screw Size | No. 8 |
| Shape | Disc |
| Additional Specifications | SDS |
| RoHS | Compliant |
| Shipping | Regulated by the U.S. Department of Transportation |