


Material:

- \* Insulation: Glass filled polyester UL 94V-0
- \* Contact: Phosphor Bronze

## Ordering Code

CF01 \*\* 1 V 0 00  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Plating code:  
1= Tin plated over Nickel
- ④ Entry option: V= Straight
- ⑤ Color: 0= Nature
- ⑥ Other options: 00= Standard

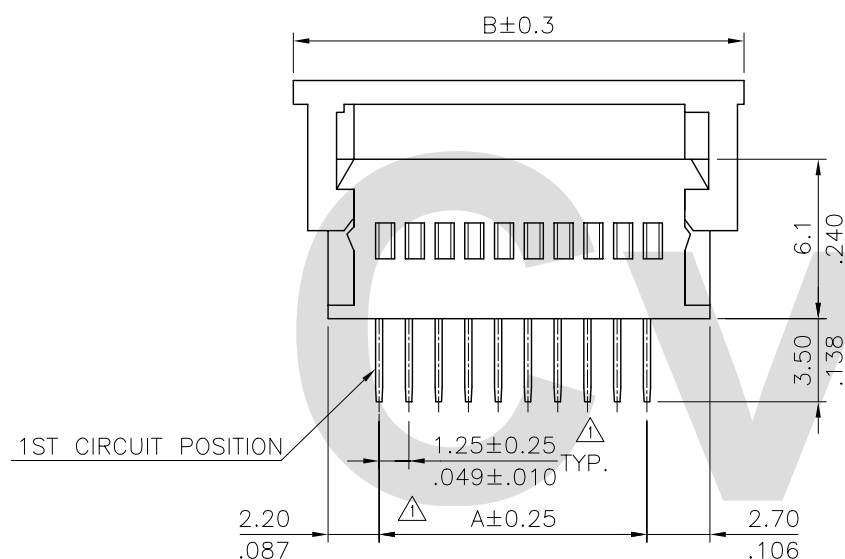


A = 1.25 \* No. of Spaces


B = A + 7.05

C = A + 2.7

\* Available in 3 through 32 circuits

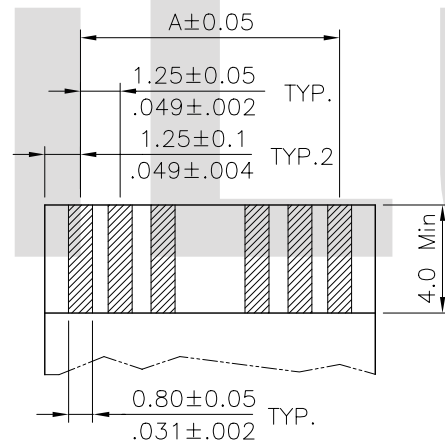


Accommodated FPC/FFC  
(Thickness: 0.3mm±0.05)

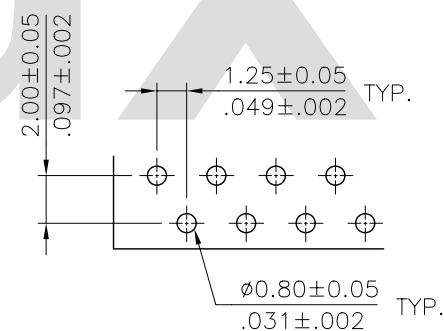

Recommended P.C. Board Layout

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.25mm(.049") ZIF FFC/FPC SOCKET	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Karen	10/07-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: Eisley	10/07-08'	.X ± 0.25/.010 X' ± 1'	DRAWING NO. CF0103SB PART NO. CF01**1V000			
1	Karen	10/1-08'	ECN08494/ECR08076-0		CHECKED BY: David	10/07-08'	.XX ± 0.15/.006 X' ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	10/07-08'	.XXX ± 0.08/.003 XX' ±	FINISH:	SCALE	3 / 1	SHEET 1 OF 1

