





## 3.3V/3A


When VBAT can fall below 3.3V use TPS63020 instead!

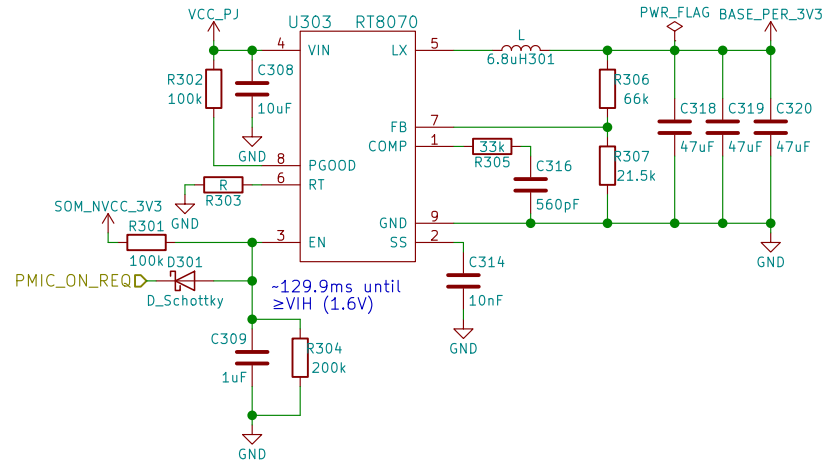


## SD POWER

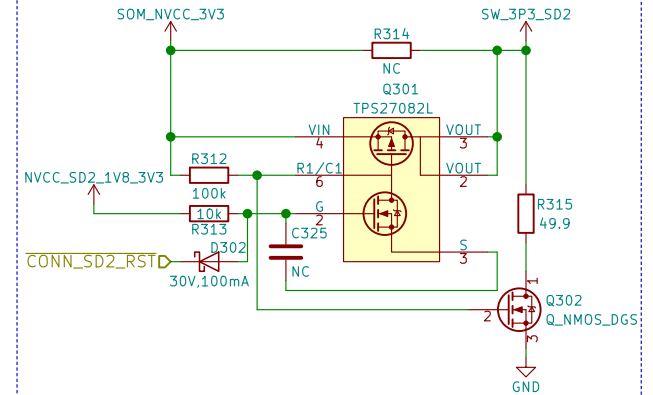


## 1.8V/600mA

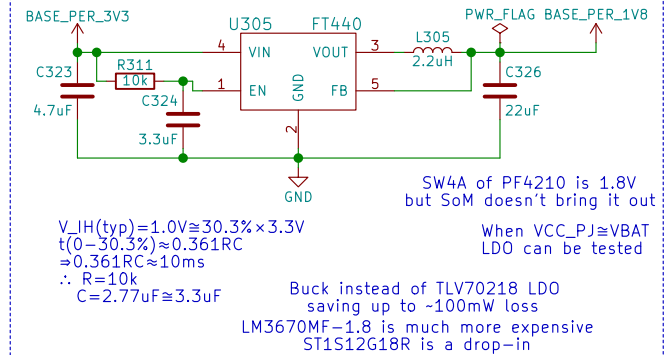

## AMOLED POWER

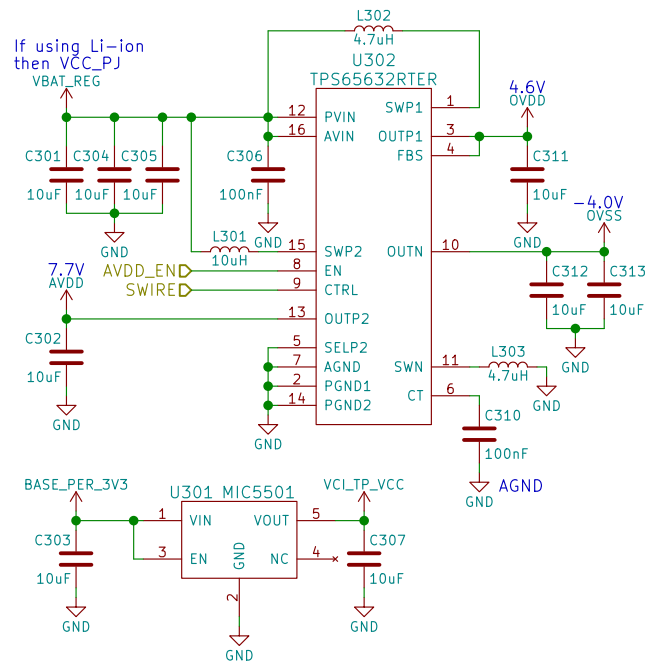

## 5.0V/800mA

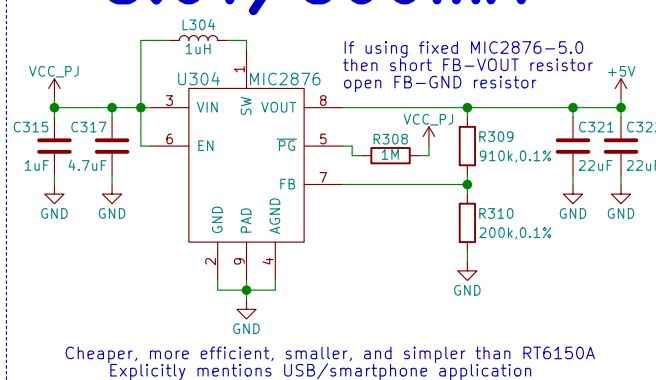

GNU GPLv3  
Copyright 2018  
Purism SPC

Sheet: /Power/  
File: power.sch


Title: Power

Size: A4  
KiCad E.D.A. kicad 4.0.7

Date: 2018-04-16

Rev: v0.1.0  
Id: 3/14

BOOT_CFG[14:12]			Boot device		
001			SD/eSD		
010			MMC/eMMC		
011			NAND		
Fuse	Config	Definition	GPIO <sup>1</sup>	Shipped value	Settings
BOOT_CFG[11:10]	OEM	USDHC port selection	Yes	00	00 - USDHC-1 01 - USDHC-2 10 - USDHC-3 else - reserved

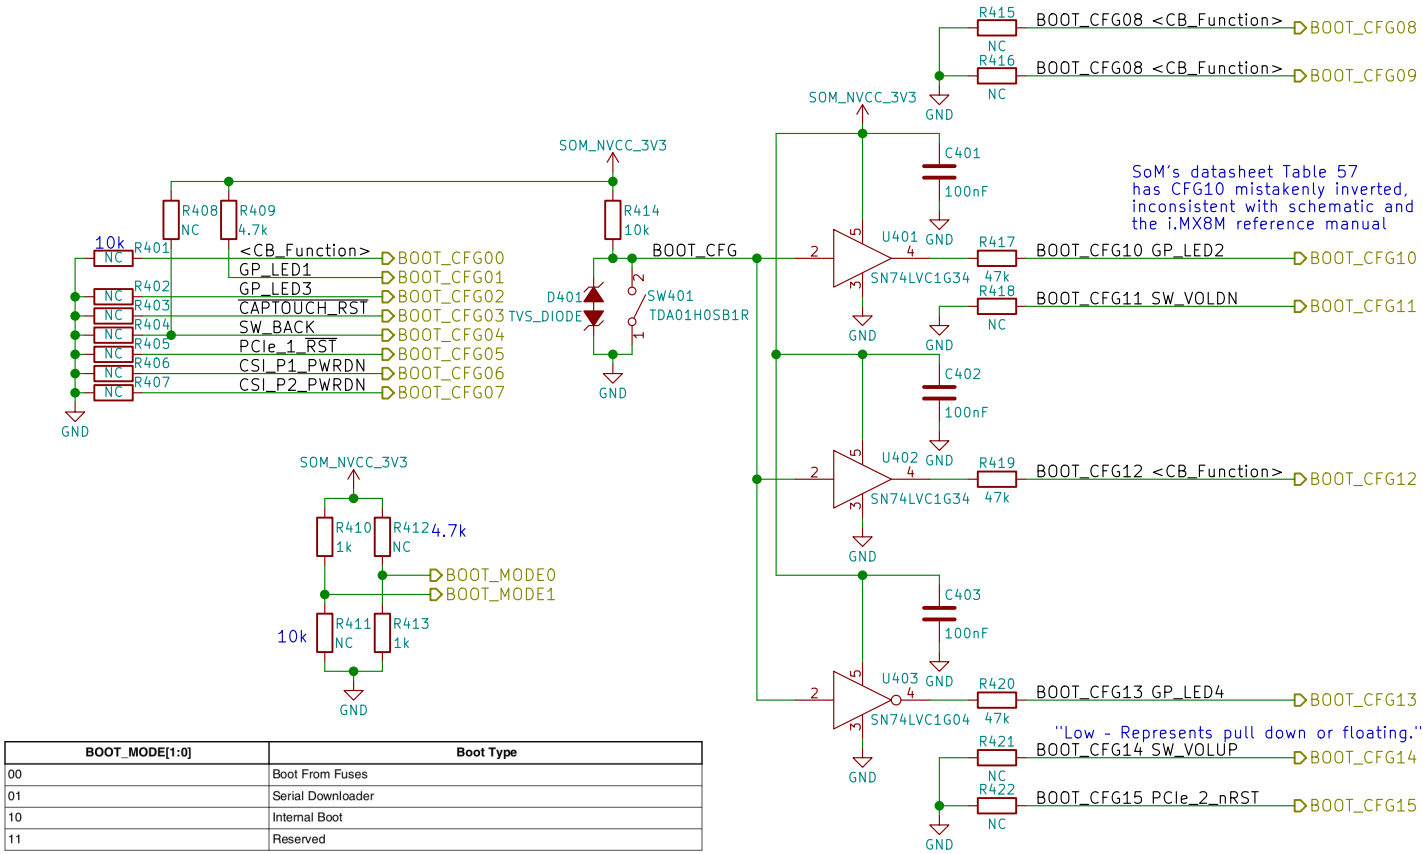

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /Boot Config/  
File: boot.sch

**Title: Boot Configuration**


Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 4/14

Id: 5/14

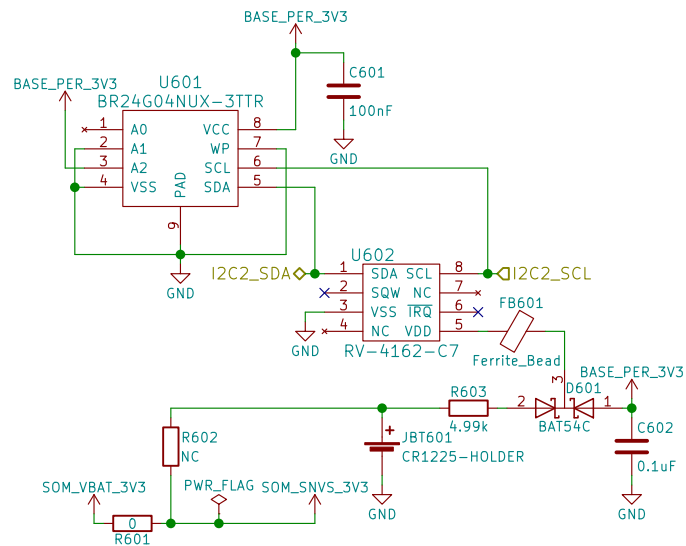

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /RTC Battery/  
File: rtc.sch


**Title: RTC Battery**

Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 6/14

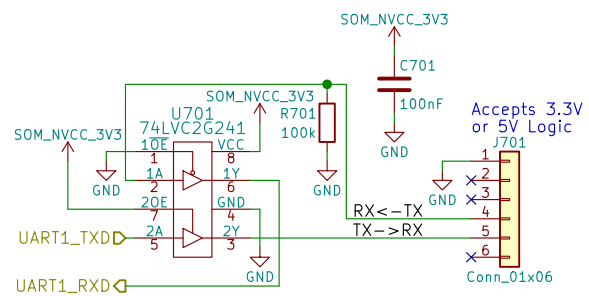

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /UART Debug/  
File: uart.sch


**Title: UART Debug**

Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 7/14

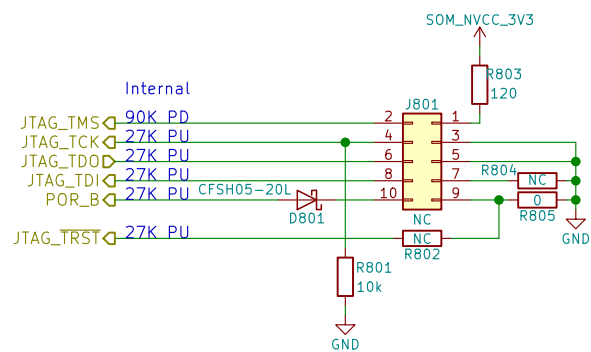



GNU GPLv3  
Copyright 2018  
**Purism SPC**  
Sheet: /JTAG/  
File: jtag.sch

**Title: JTAG**

Size: A4  
Date: 2018-04-16  
KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**  
Id: 8/14



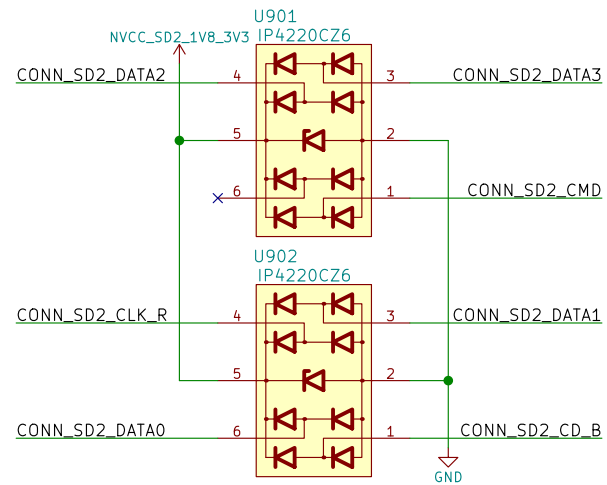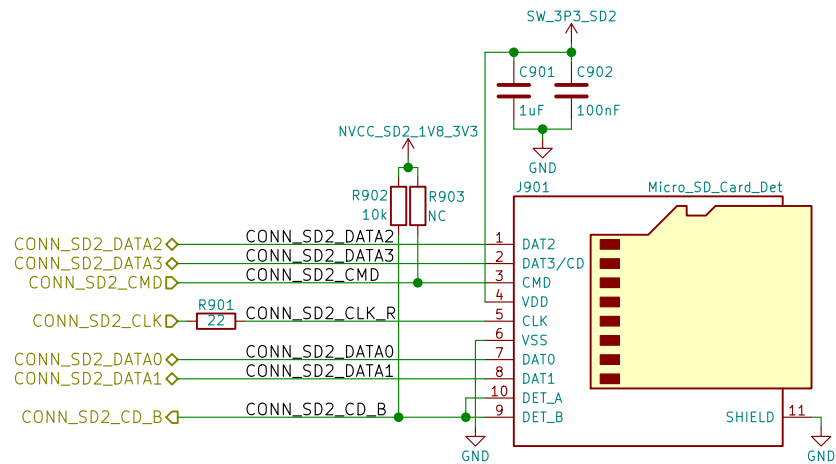

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /uSD Card/  
File: sd.sch

**Title: uSD Card**


Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 9/14

USB1\_ID

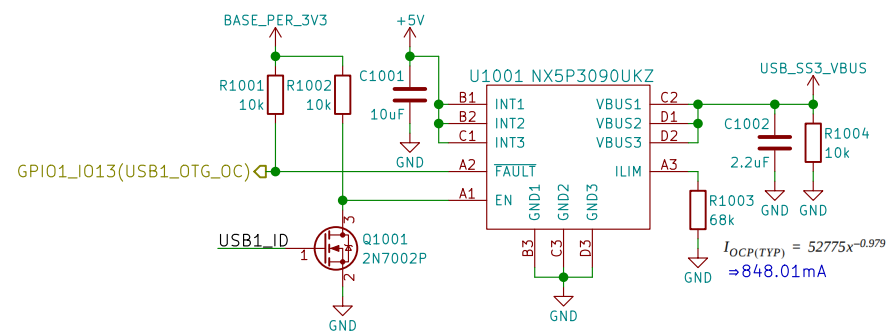

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /USB/  
File: usb.sch

**Title: USB**



Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 10/14

Using H546DLB01.1 pin assignment may need to be changed depending on display used

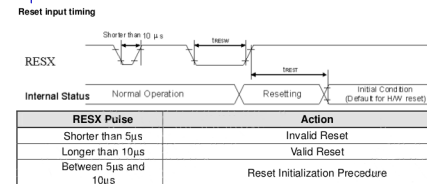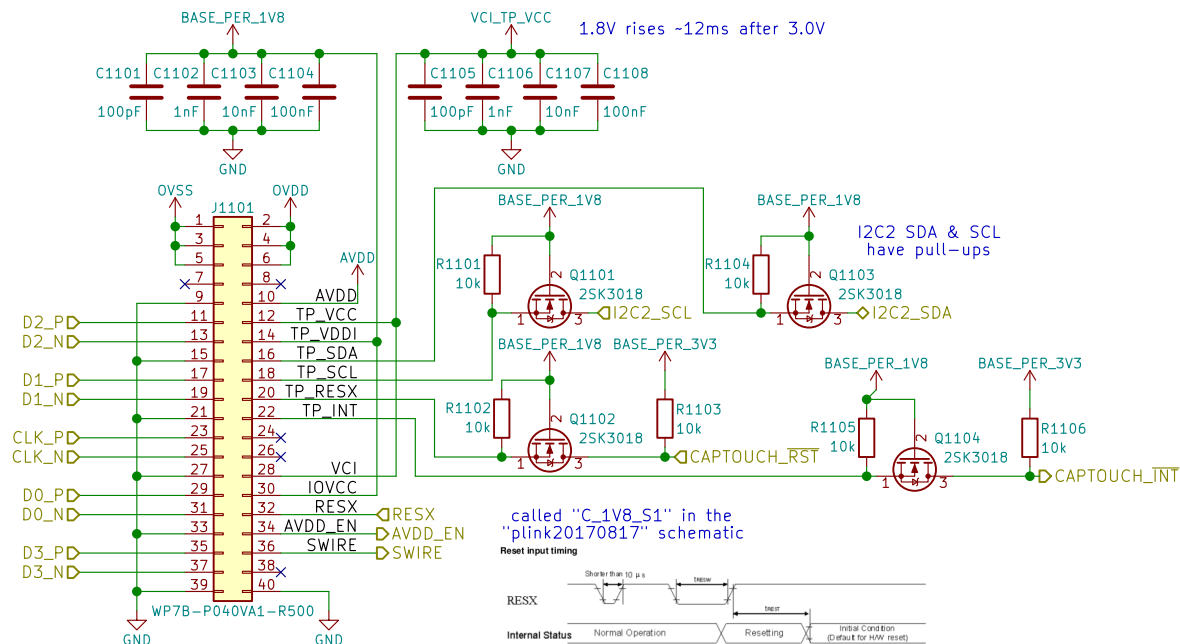

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /MIPI DSI/  
File: mipi\_dsi.sch



**Title: MIPI DSI**

Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 11/14

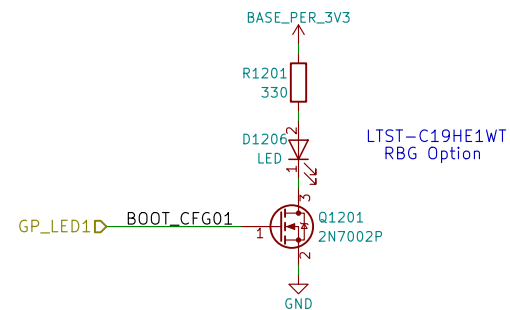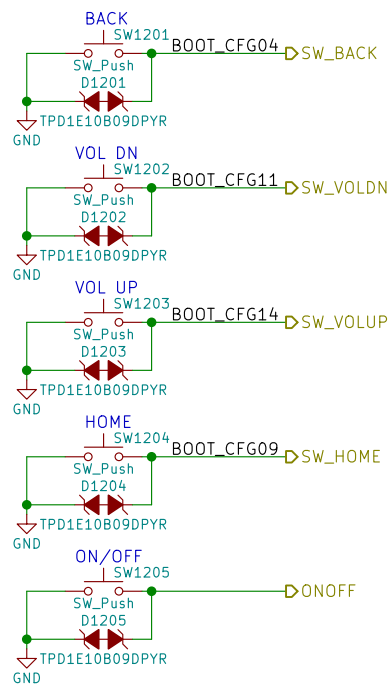

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /Buttons & LED/  
File: buttons\_led.sch


**Title: Buttons & LED**

Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 12/14

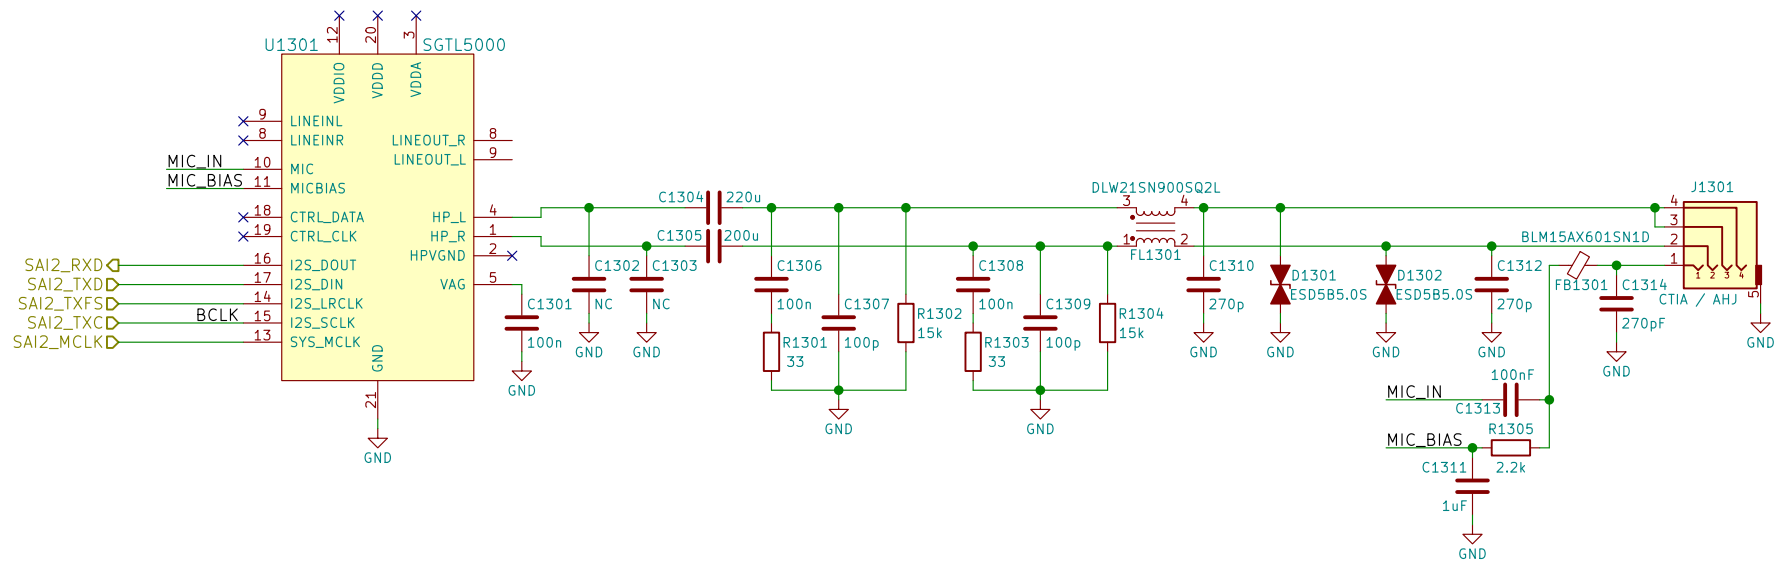

GNU GPLv3  
Copyright 2018

**Purism SPC**

Sheet: /Audio/  
File: audio.sch


**Title: Audio**

Size: A4 Date: 2018-04-16

KiCad E.D.A. kicad 4.0.7

**Rev: v0.1.0**

Id: 13/14

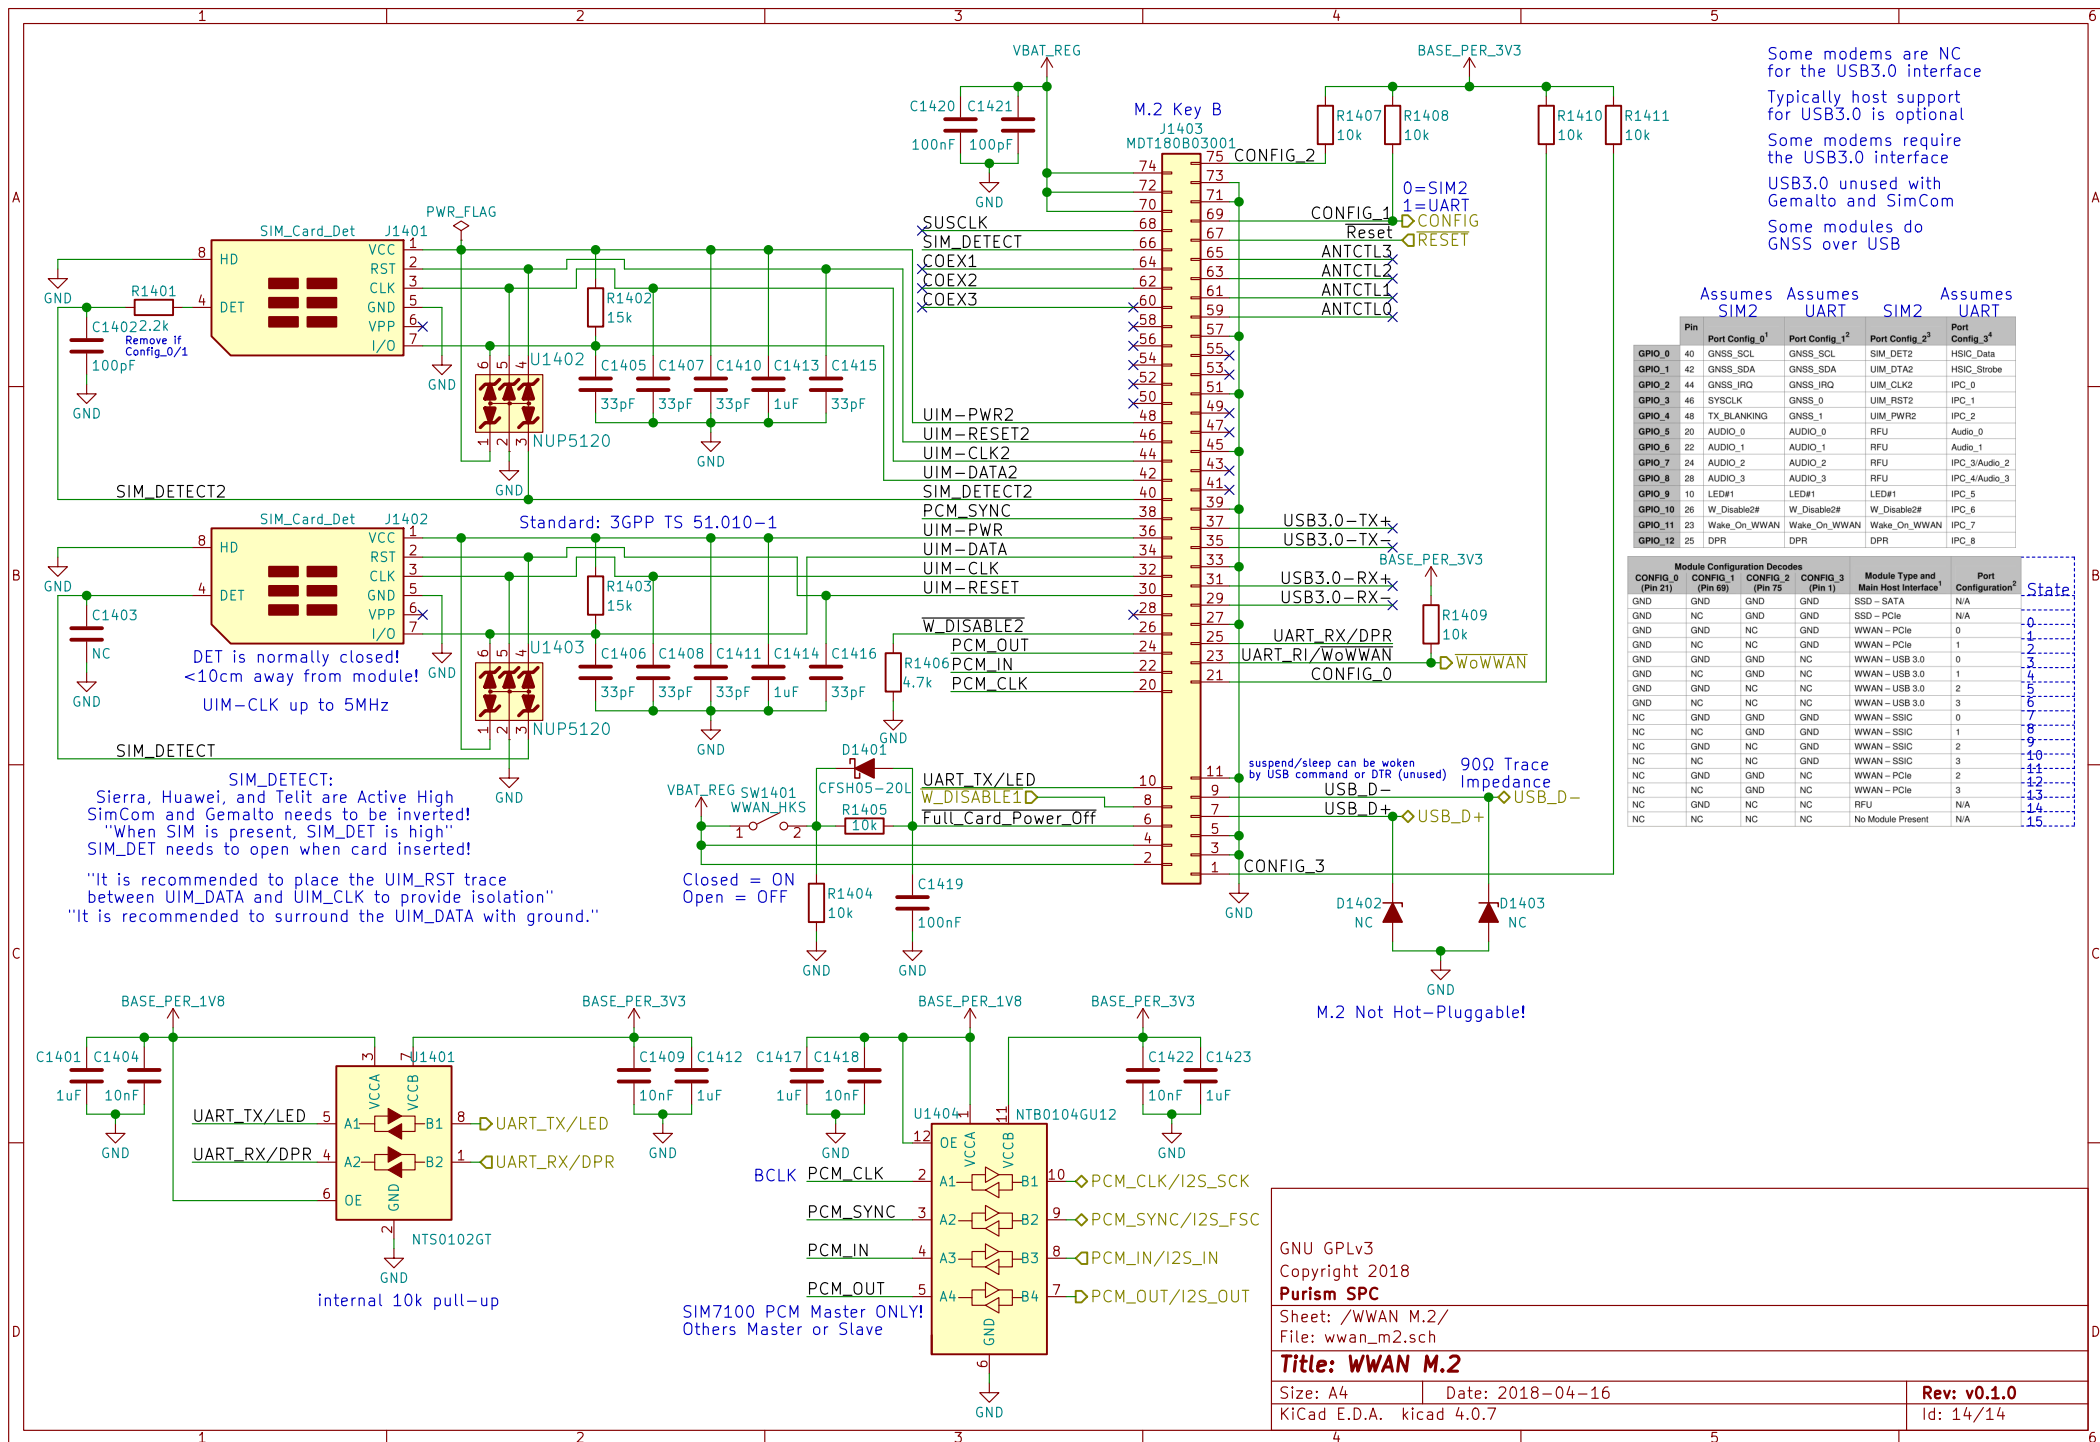

Some modems are NC for the USB3.0 interface  
Typically host support for USB3.0 is optional  
Some modems require the USB3.0 interface  
USB3.0 unused with Gemalto and SimCom  
Some modules do GNSS over USB

		Assumes SIM2	Assumes UART	Assumes SIM2	Assumes UART
Pin		Port Config. 0 <sup>1</sup>	Port Config. 1 <sup>2</sup>	Port Config. 2 <sup>3</sup>	Port Config. 3 <sup>4</sup>
GPIO_0	40	GNSS_SCL	GNSS_SCL	SIM_DET2	HSIC_Data
GPIO_1	42	GNSS_SDA	GNSS_SDA	UIM_DTA2	HSIC_Strobe
GPIO_2	44	GNSS_IRQ	GNSS_IRQ	UIM_CLK2	IPC_0
GPIO_3	46	SYSClk	GNSS_0	UIM_RST2	IPC_1
GPIO_4	48	TX_BLANKING	GNSS_1	UIM_PWR2	IPC_2
GPIO_5	20	AUDIO_0	AUDIO_0	RFU	Audio_0
GPIO_6	22	AUDIO_1	AUDIO_1	RFU	Audio_1
GPIO_7	24	AUDIO_2	AUDIO_2	RFU	IPC_3/Audio_2
GPIO_8	28	AUDIO_3	AUDIO_3	RFU	IPC_4/Audio_3
GPIO_9	10	LED#1	LED#1	LED#1	IPC_5
GPIO_10	26	W_Disable2#	W_Disable2#	W_Disable2#	IPC_6
GPIO_11	23	Wake_On_WWAN	Wake_On_WWAN	Wake_On_WWAN	IPC_7
GPIO_12	25	DPR	DPR	DPR	IPC_8

		Module Configuration Decodes	Module Type and Main Host Interface <sup>1</sup>	Port Configuration <sup>2</sup>	State
CONFIG_0 (Pin 21)	CONFIG_1 (Pin 69)	CONFIG_2 (Pin 75)	CONFIG_3 (Pin 1)		
GND	GND	GND	GND	SSD - SATA	N/A
GND	NC	GND	GND	SSD - PCIe	N/A
GND	GND	NC	GND	WWAN - PCIe	0
GND	NC	NC	GND	WWAN - PCIe	1
GND	GND	GND	NC	WWAN - USB 3.0	2
GND	NC	GND	NC	WWAN - USB 3.0	3
GND	GND	NC	NC	WWAN - USB 3.0	4
GND	NC	NC	NC	WWAN - USB 3.0	5
GND	NC	NC	NC	WWAN - USB 3.0	6
NC	GND	GND	GND	WWAN - SSIC	7
NC	NC	GND	GND	WWAN - SSIC	8
NC	GND	NC	GND	WWAN - SSIC	9
NC	NC	NC	GND	WWAN - SSIC	10
NC	GND	NC	NC	WWAN - PCIe	11
NC	NC	GND	NC	WWAN - PCIe	12
NC	NC	NC	NC	RFU	13
NC	GND	NC	NC	RFU	14
NC	NC	NC	NC	No Module Present	15