


(interpret RSOC% based on this plot)

Drawing ~320mA, or consuming $\leq 1.152W$, should give close to 10 hours going from 100% to 0% charge

use AUTO_DPDM_EN to auto-detect IINLIM

$1.658 \leq ILIM \leq 2.063$
 $ILIM(nom) \approx 1.859A$
 $3.9 \leq VIN \leq 6$
 7-bit Slave Address: 0x6B (1101 011x)

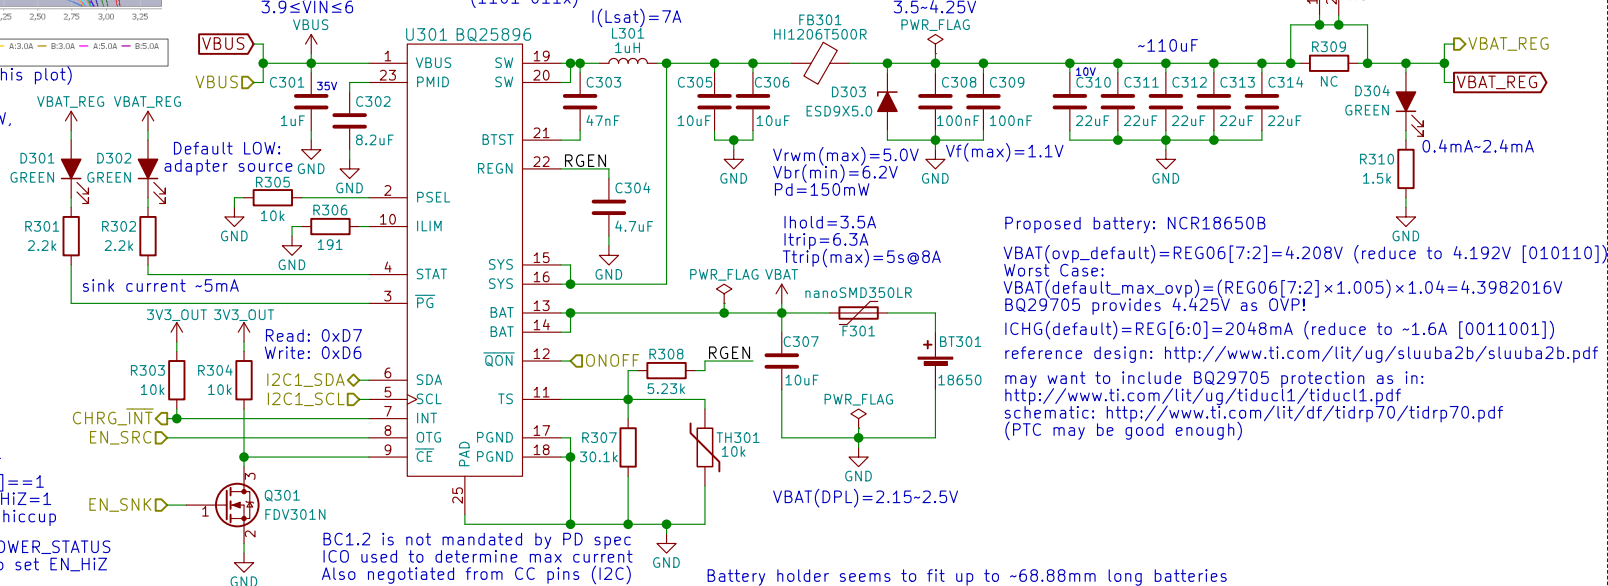

Proposed battery: NCR18650B

$V_{BAT}(ovp_default) = REG06[7:2] = 4.208V$ (reduce to 4.192V [010110])
 Worst Case:
 $V_{BAT}(default_max_ovp) = (REG06[7:2] \times 1.005) \times 1.04 = 4.3982016V$
 BQ29705 provides 4.425V as OVP!
 $ICHG(default) = REG[6:0] = 2048mA$ (reduce to -1.6A [0011001])
 reference design: <http://www.ti.com/lit/ug/sluuba2b/sluuba2b.pdf>
 may want to include BQ29705 protection as in:
<http://www.ti.com/lit/ug/tiduc1/tiduc1.pdf>
<http://www.ti.com/lit/df/tidrp70/tidrp70.pdf>
 (PTC may be good enough)

Battery holder seems to fit up to ~68.88mm long batteries
 need to test 18650 protected cells which are ~69.35mm long

Reading PTN5110HQ's CC_STATUS and POWER_STATUS registers will tell TCPM (i.MX8M) when to set EN_HiZ

Also, reading PTN5110HQ's CC_STATUS and POWER_STATUS registers will tell TCPM (i.MX8M) when to set OTG_CONFIG=1 (this will also happen when PTN5110HQ sets EN_SRC HIGH)

Battery

Purism

Copyright 2018 GNU GPLv3


Sheet: /Battery/
 File: battery.sch

Size: A4
 KiCad E.D.A. kicad 5.0.0


eric.kuzmenko@puri.sm
 angus.ainslie@puri.sm
 nicole.ferber@puri.sm
 christian.schilmoeller@puri.sm

Rev: v0.1.0
 Id: 3/24


3.3V/3A

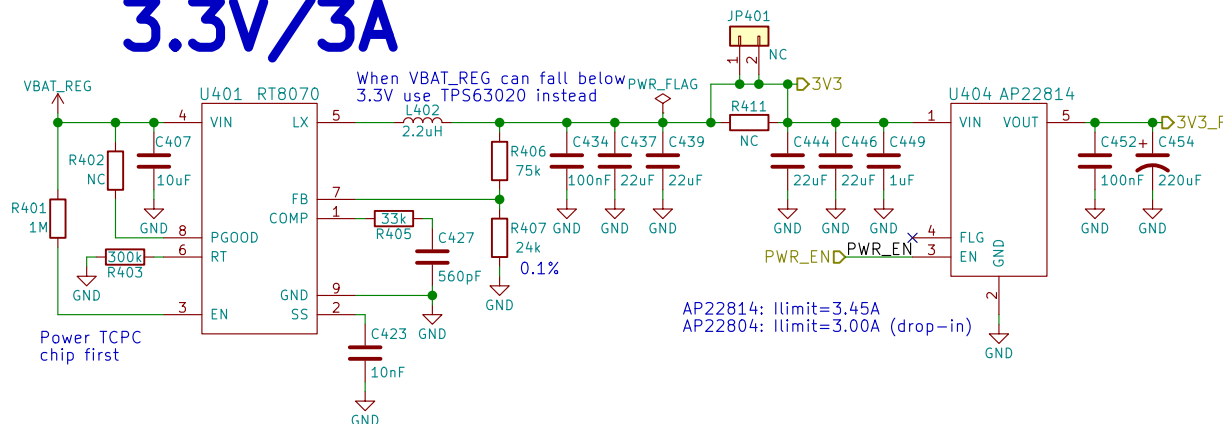


1.8V/600mA

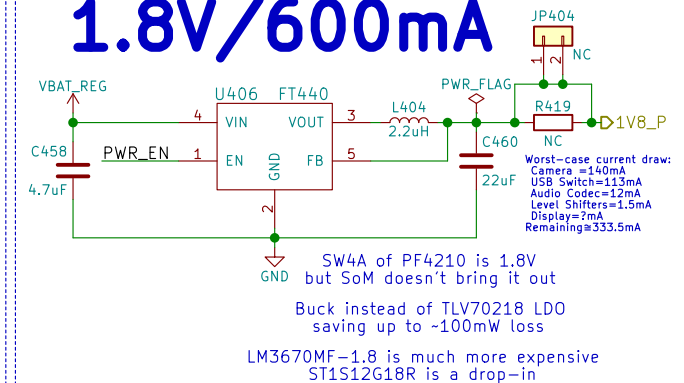


5.0V/3.8A

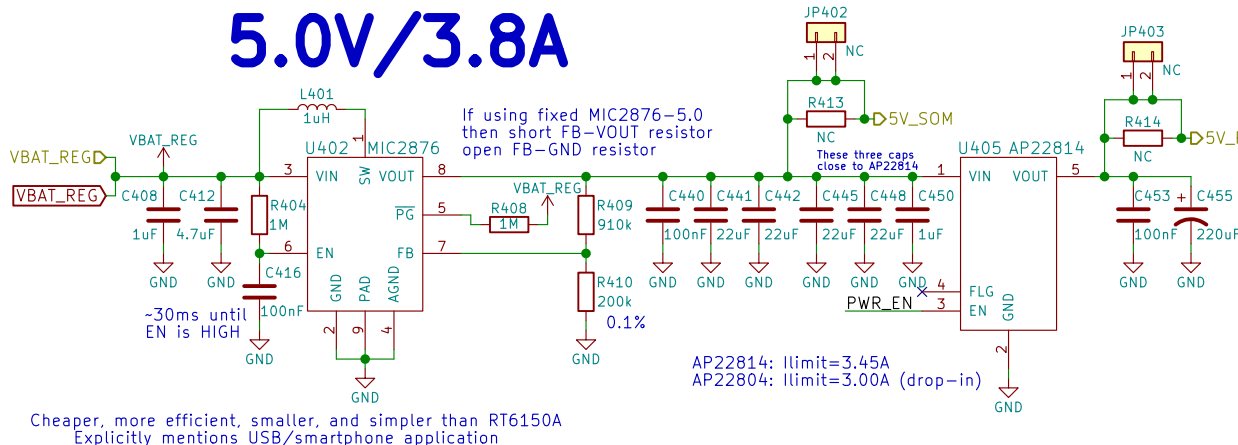


22.4V/40mA

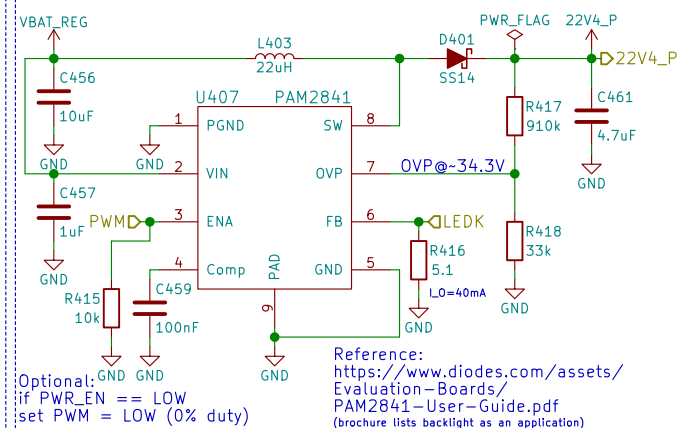

2.8V/150mA

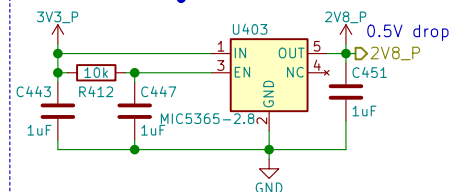

Power

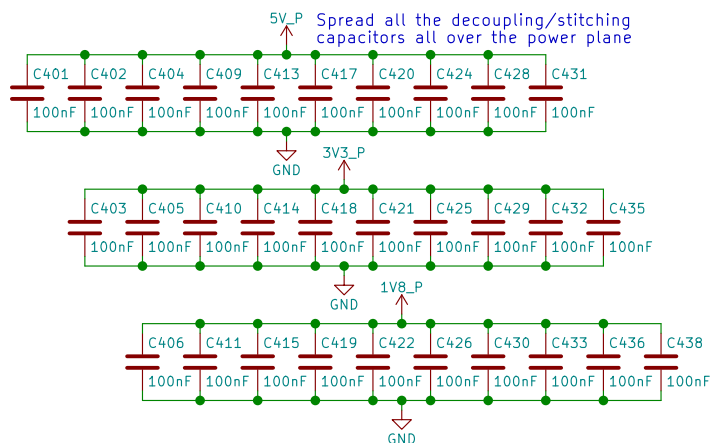

Power

Purism

Copyright 2018 GNU GPLv3

Sheet: /Power/
File: power.sch

Size: A4
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm



angus.ainslie@puri.sm

nicole.faeber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 4/24





Boot Config

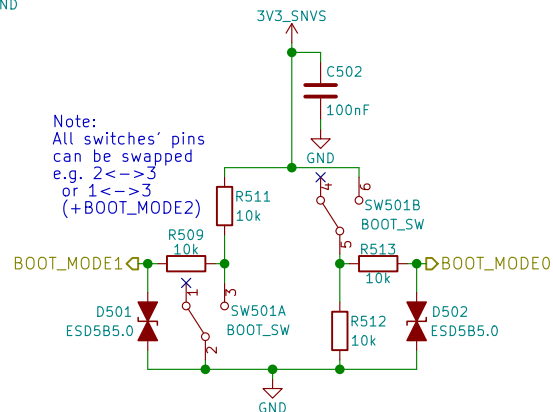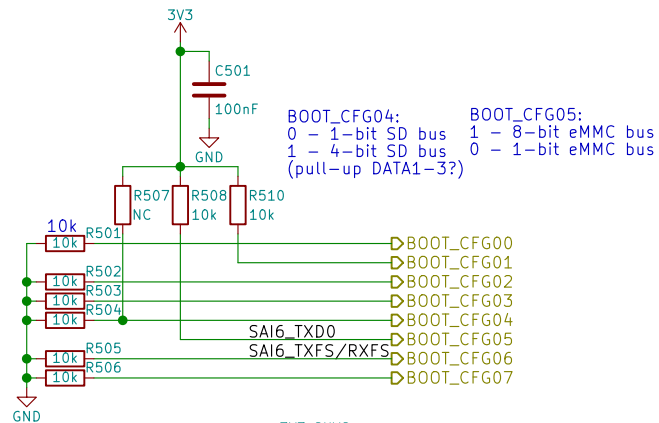

2->1: eMMC 2->3: USB (Serial Downloader)	
BOOT_MODE[1:0]	Boot Type
00	Boot From Fuses
01	Serial Downloader
10	Internal Boot
11	Reserved

Only eMMC	
BOOT_CFG[14:12]	Boot device
001	SD/eSD
010	MMC/eMMC
011	NAND

Fuse	Config	Definition	GPIO ¹	Shipped value	Settings
BOOT_CFG[11:10]	OEM	USDHC port selection	Yes	00	00 - USDHC-1 01 - USDHC-2 10 - USDHC-3 else - reserved

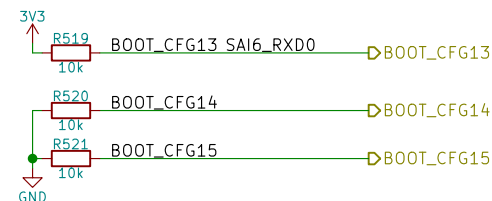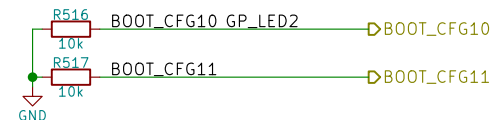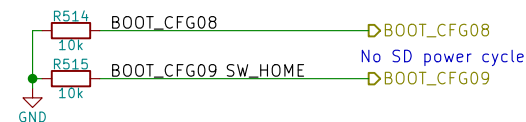

Boot Configuration



Copyright 2018 GNU GPLv3

Sheet: /Boot Config/
File: boot.sch

Size: A4
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm


nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 5/24

Real-Time Clock

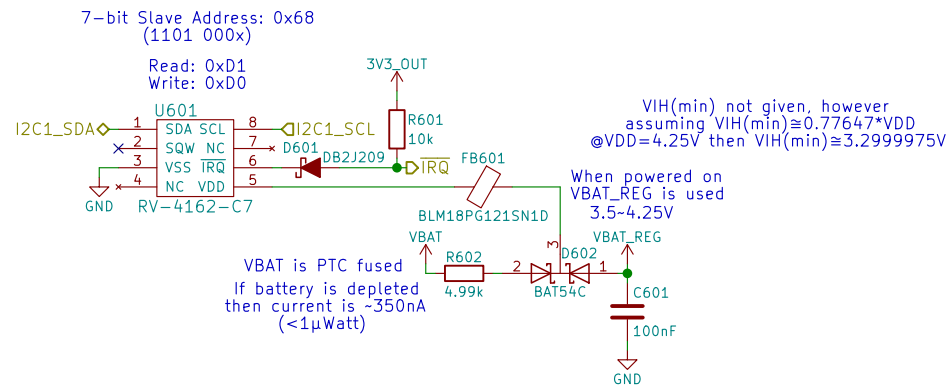

Note:
Datasheet says slave address is 0xD0
with a R/W bit appended, since 0xD must
be 4-bits wide the actual 7-bit address is
0x68 (110 1000), and becomes 0xD0 during a
write operation (1101 0000)

Reference:
https://github.com/HIO-Project/linux-imx6-nano-imx_3.10.17_1.0.1_ga/blob/8848e94b2f889fe44f6736e2d4c98851a2282275/arch/arm/boot/dts/imx6qdl-mtp.dtsi#L351

RTC



Copyright 2018 GNU GPLv3

Sheet: /RTC/

File: rtc.sch

Size: A4

Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 6/24


eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

UART Debug

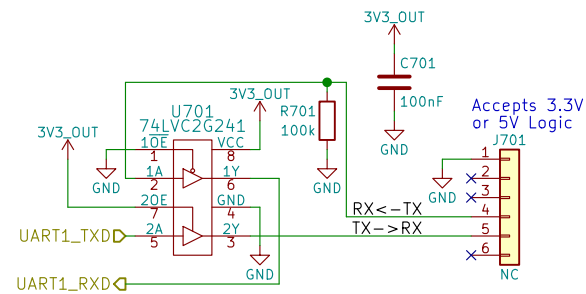

UART Debug



Copyright 2018 GNU GPLv3


Sheet: /UART Debug/
File: uart.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
angus.ainstlie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 7/24

JTAG

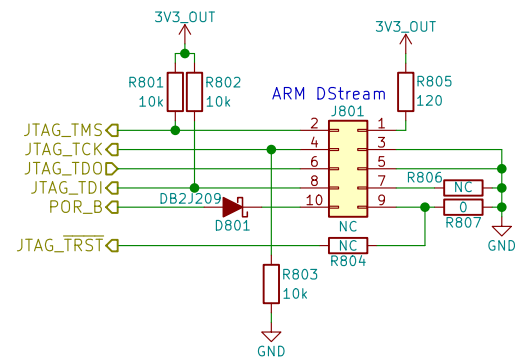

JTAG



Copyright 2018 GNU GPLv3

Sheet: /JTAG/

File: jtag.sch

Size: A4	Date: 2018-08-14
----------	------------------

Size: A4	Date: 11/01/2025
KiCad E.D.A.	kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm


nicole.faerber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 8/24

USB Hub + SDIO Bridge

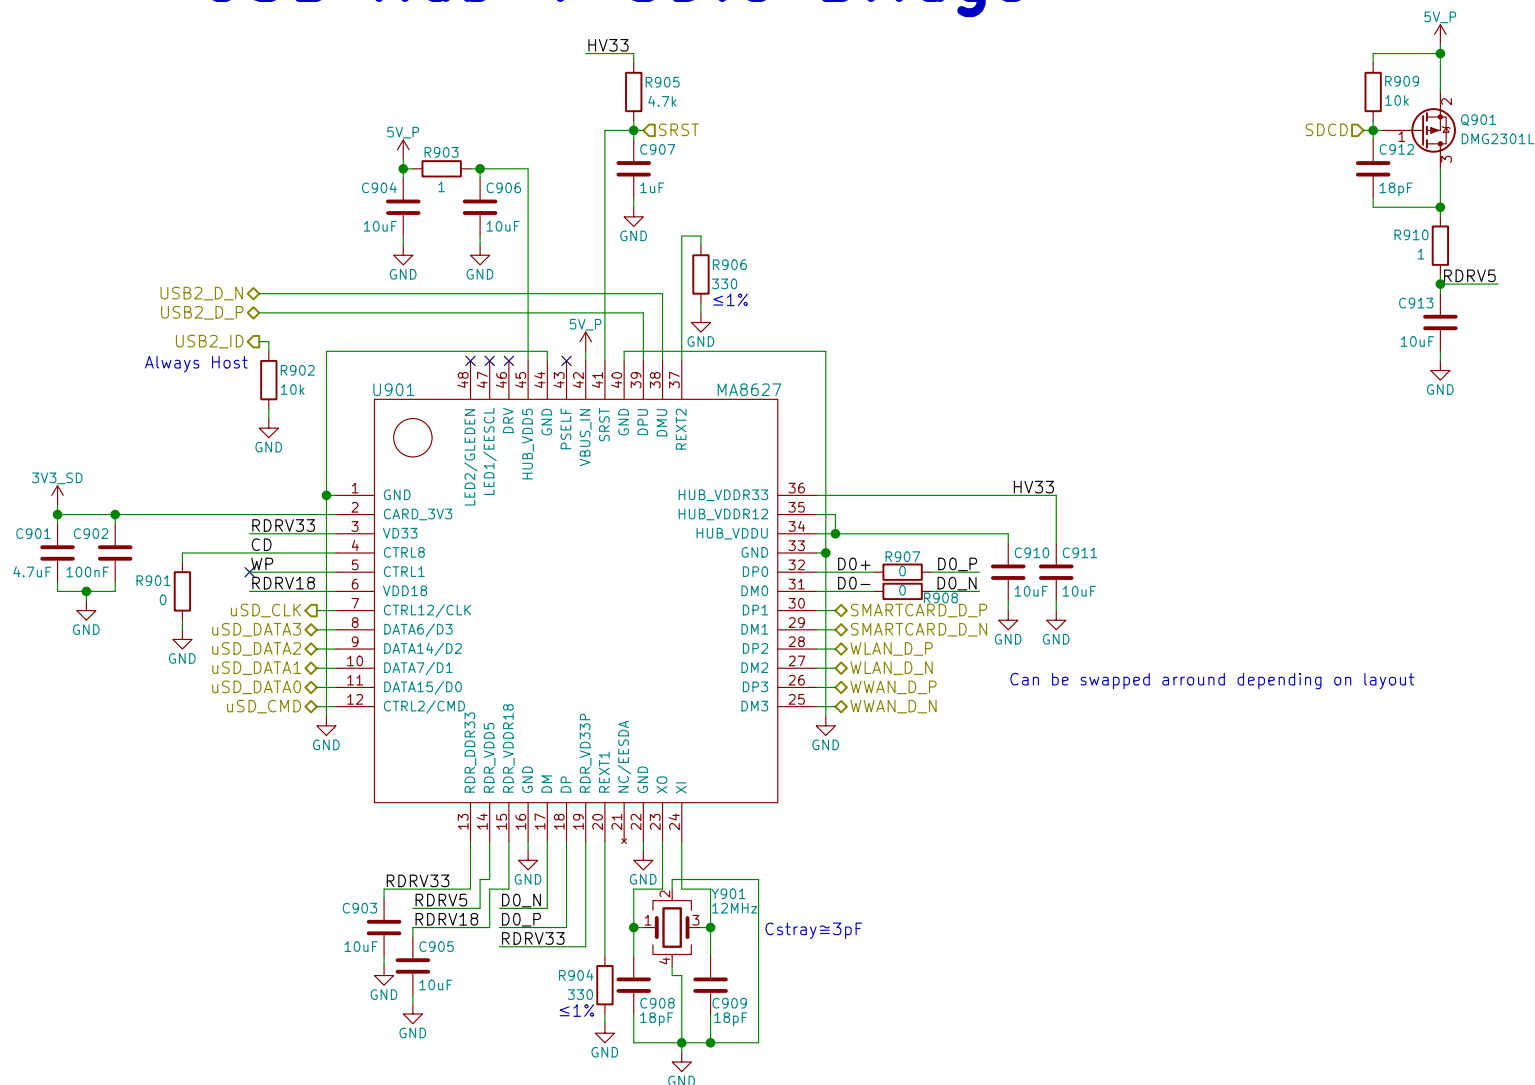

USB Hub + SDIO Bridge



Copyright 2018 GNU GPLv3


Sheet: /USB Hub + SDIO Bridge/
File: usb_hub_sdio.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
angus.ainstie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 9/24

μSD

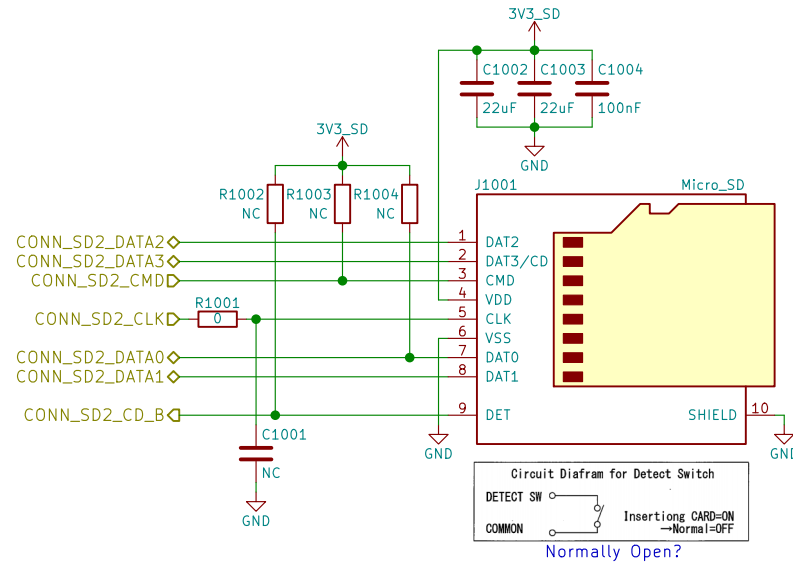

uSD Card



Purism

Copyright 2018 GNU GPLv3

Sheet: /uSD Card/

File: sd.sch

Size: A4 Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 10/24


eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

MIPI

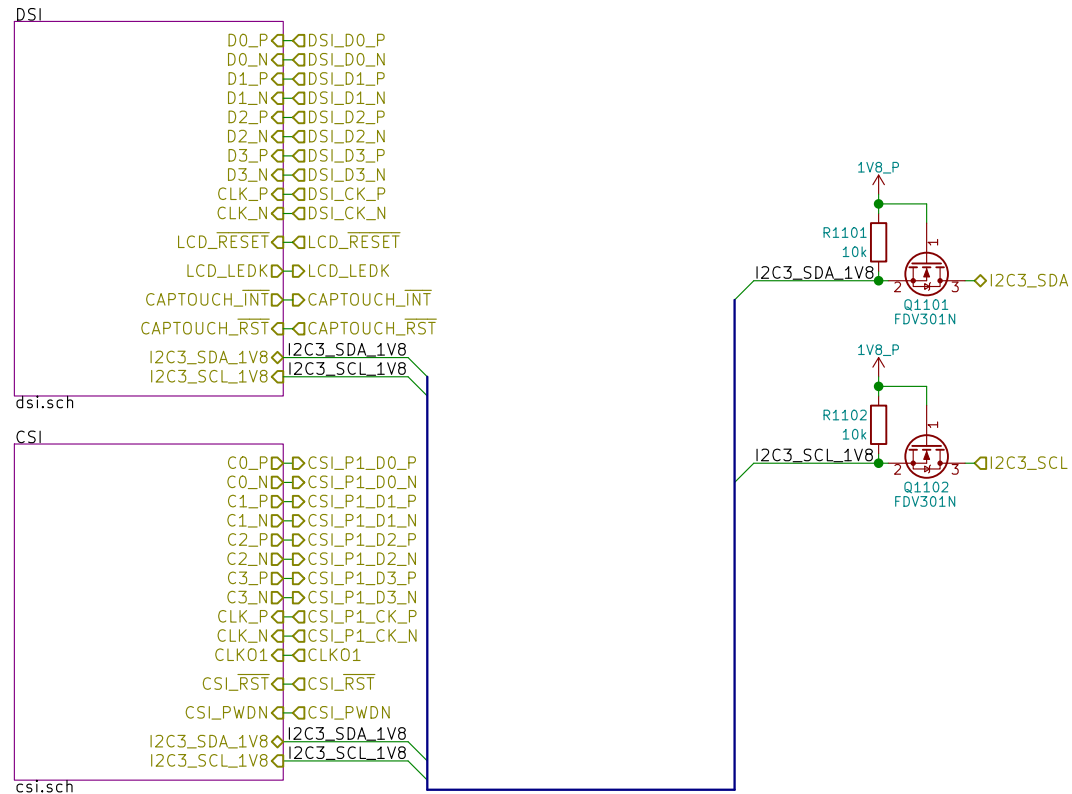

MIPI



Copyright 2018 GNU GPLv3

Sheet: /MIPI/
File: mipi.sch

Size: A4 Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm


nicole.farber@puri.sm

christian.schilmoeller@puri.sm



Rev: v0.1.0

Id: 11/24

LCD PN:
Shenzhen Jinghong Electronics Co., Ltd.
JH057N00900

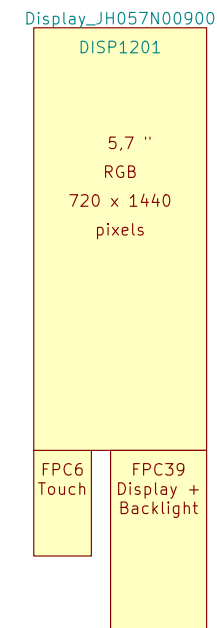

	7-Bit Address	8-Bit Write Address	8-Bit Read Address
LOW	0x5D	0xBA	0xBB
HIGH	0x14	0x28	0x29

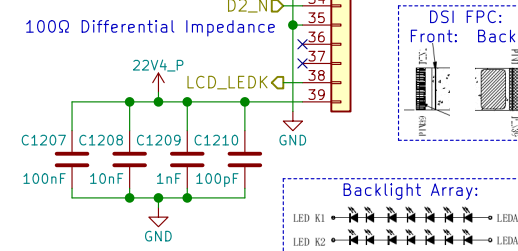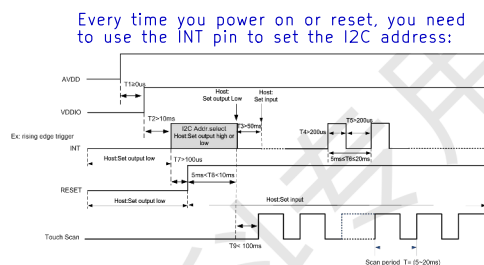

 Purism

eric.kuzmenko@puri.sm
angus.ainslie@puri.sm
nicole.ferber@puri.sm
christian.schilmoeller@puri.sm

Size: A4	Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0	

Rev: v0.1.0
Id: 12/24

Buttons & LED



Use PWM2_PWMSAR to set the compare value (duty cycle)
Use PWM2_PWMCR[15:4] to set the PRESCALER (frequency)
Use PWM2_PWMPR to set the top of the counter (frequency)



Buttons & LED



Copyright 2018 GNU GPLv3


Sheet: /Buttons & LED/
File: buttons_led.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
angus.ainstie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 14/24

WWAN mPCIe

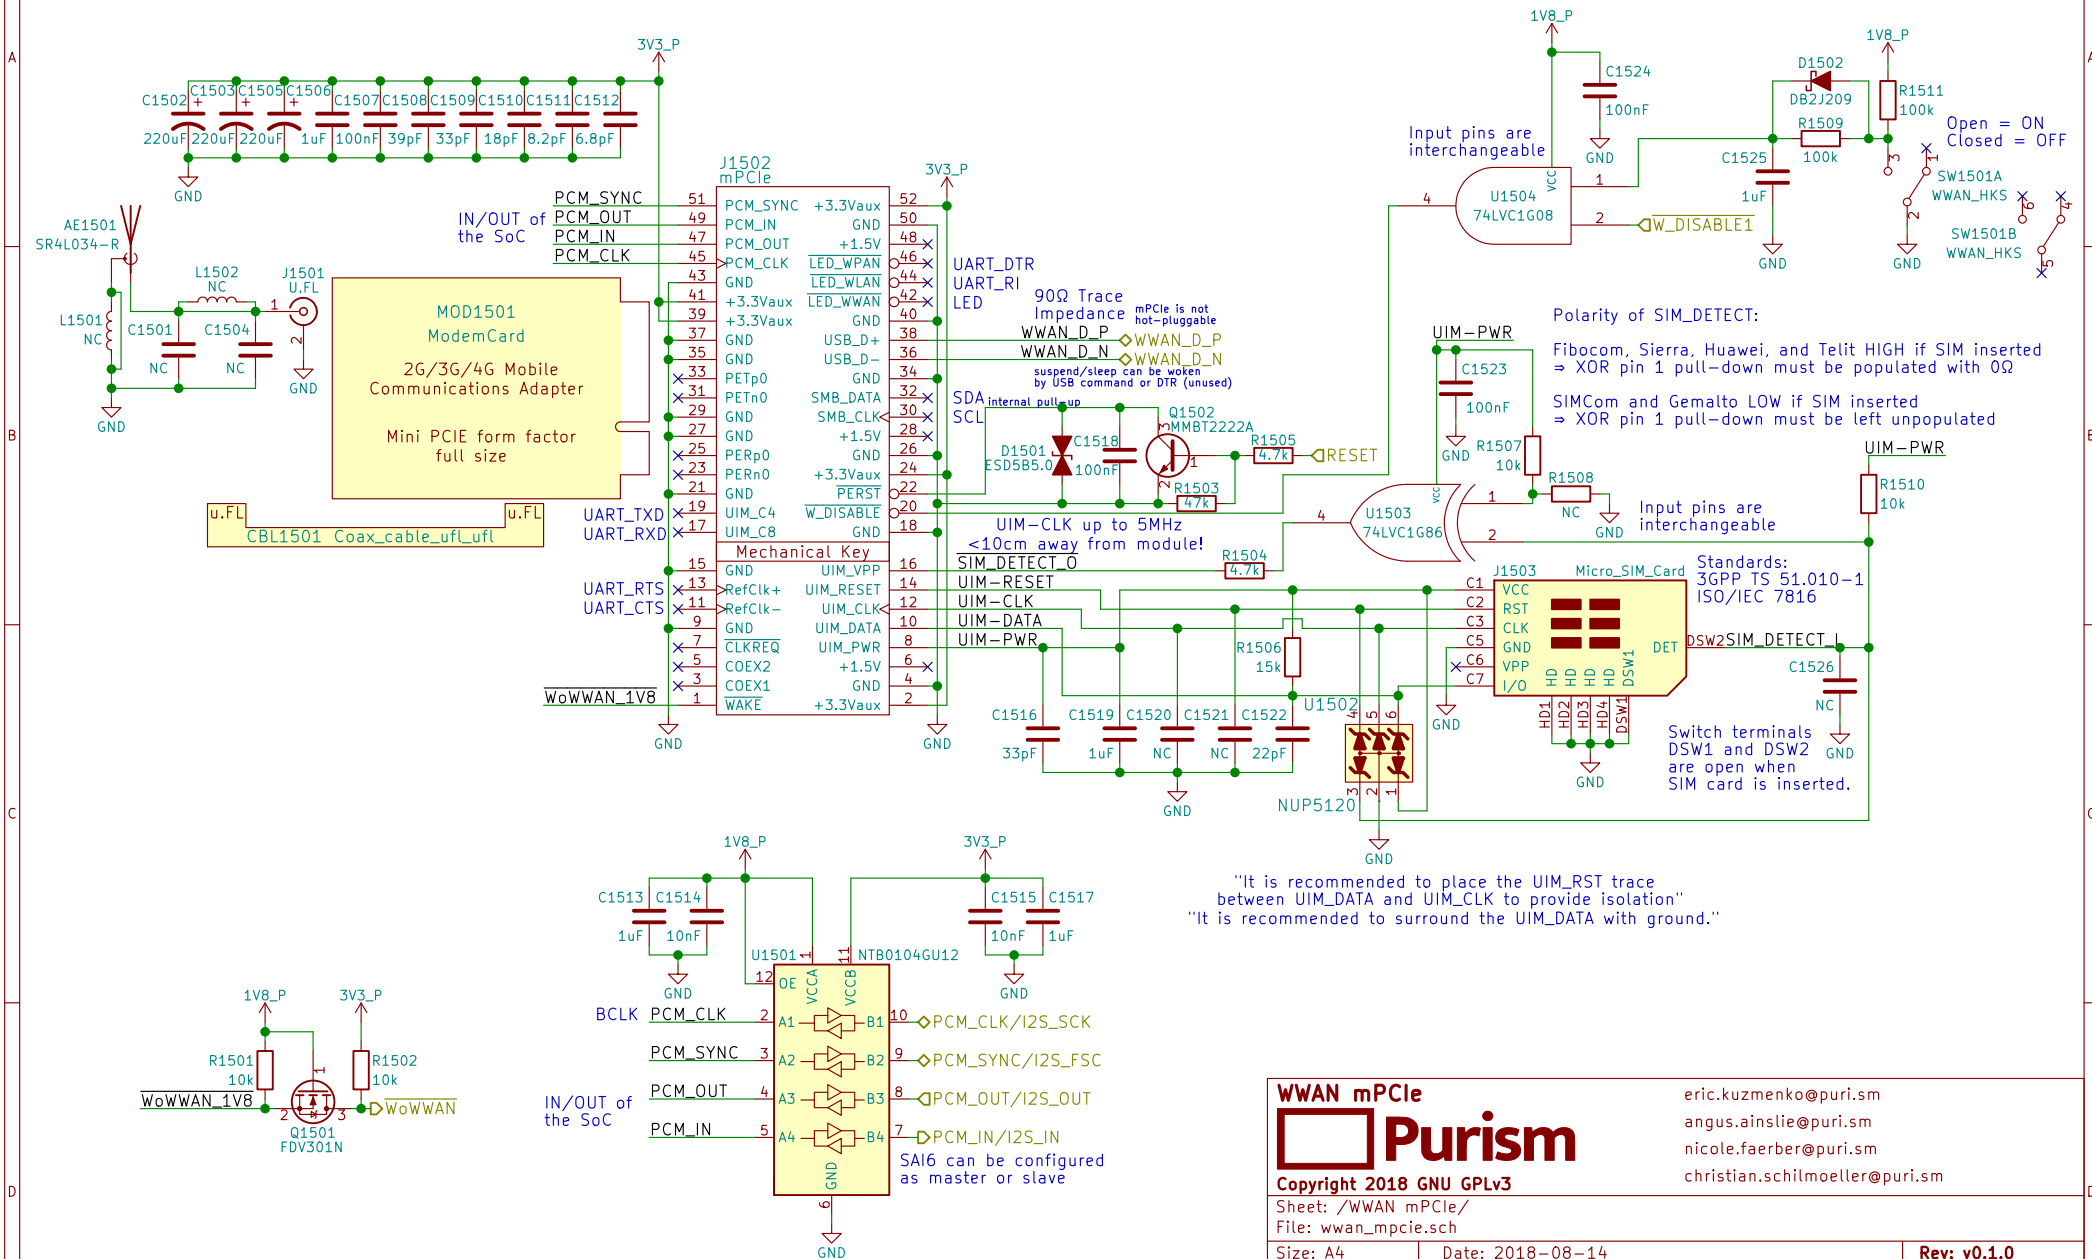

Purism


Sheet: /WWAN mPCIe/
File: wwan_mpcie.sch

Size: A4	Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0	

eric.kuzmenko@puri.sm
angus.ainslie@puri.sm
nicole.ferber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 15/24

Audio

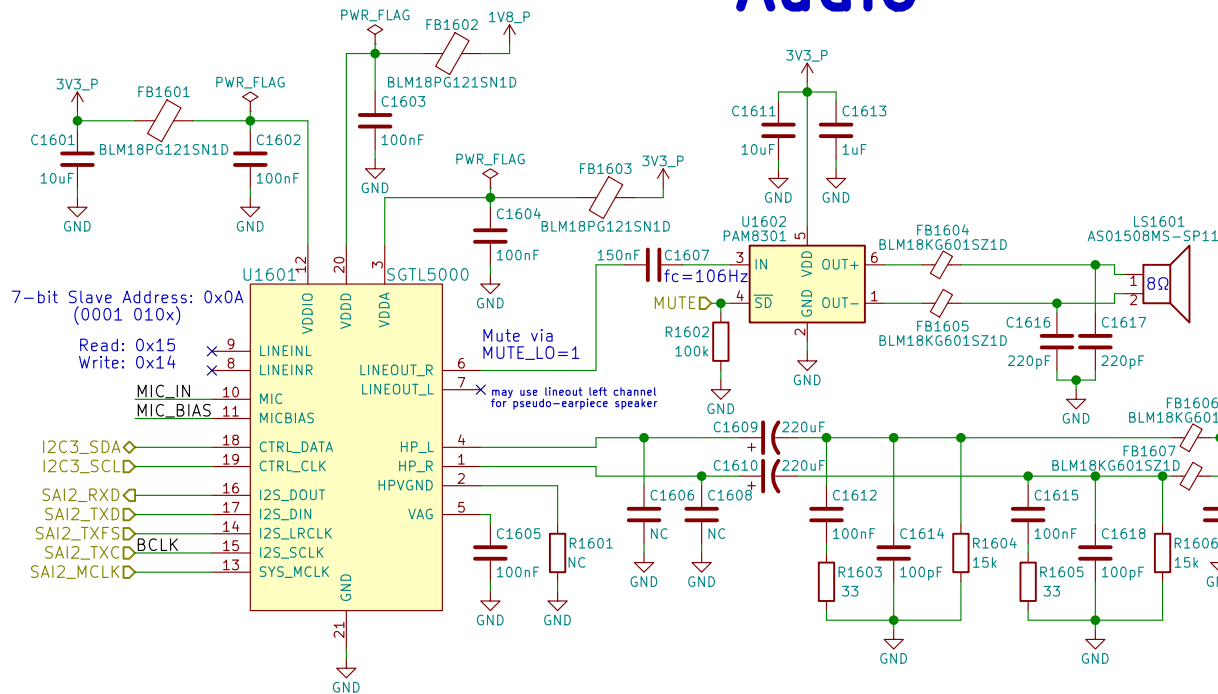

Reference:
http://www.52rd.com/S_txt/2011_3/TXT26685.htm
<http://www.sengpielaudio.com/calculator-transferfactor.htm>
<https://electronics.stackexchange.com/questions/31442/how-can-i-switch-this-audio-jack-using-its-own-mechanical-switches-without-circuit6>
 (Nit6 does the same)
 +Zener diode to protect against ranges outside of -0.9V to 3.3V



dB specs in datasheet is a unit of power gain (not dBu or VU)
with respect to the DAC's unattenuated output

"HP Output – 62.5mW max, 1.02kHz sine into 16Ω load at 3.3 V"
 $\Rightarrow (1V)^2 / (16\Omega) = 62.5mW$
 $\therefore V_{rms} = 1V \Rightarrow V_p(\text{amplitude}) = 1.414V$
 $\therefore I_{rms}(\text{max}) = 62.5mA$


If HP_DET is HIGH for >100ms then HPs are present

S/E button on earbud headsets
shorts the mic for key function

Could use FSA8008 to detect mic

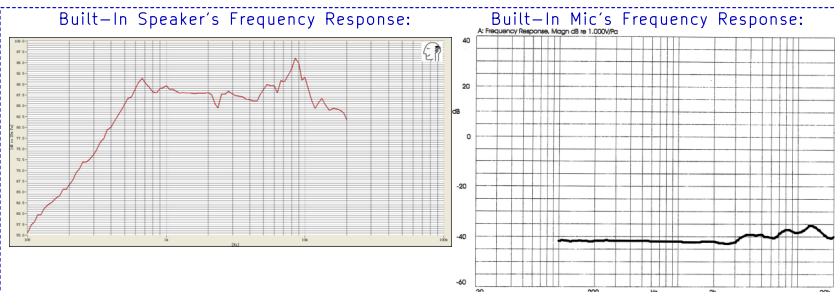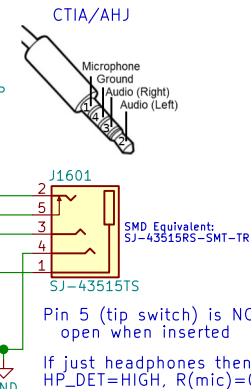

Simulation of HP_DET
without HP jack inserted:

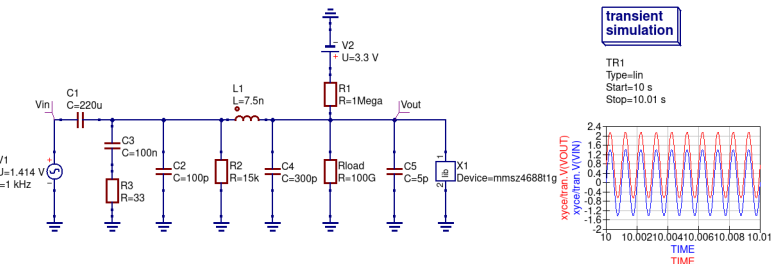

LCR Measurements:

Earbud Microphone:	Headset Speaker:	Earbud Speaker:
$\leq 1\text{kHz}$ $L_s = 3.844\text{mH}$ $L_p = 15.757\text{H}$ $C_s = 6.583\text{uF}$ $C_p = 1612.8\text{pF}$ $R_s = 1.5465\text{60k}\Omega\text{s}$ $R_p = 1.5478\text{0k}\Omega\text{s}$ $\theta = -0.8\text{deg}$	$\leq 1\text{kHz}$ $L_s = 244.4\text{uH}$ $L_p = 141.99\text{mH}$ $C_s = 103.6\text{uF}$ $C_p = 178.77\text{nF}$ $R_s = 36.86\text{0k}\Omega\text{s}$ $R_p = 36.86\text{0k}\Omega\text{s}$ $\theta = -2.3\text{deg}$	$\leq 1\text{kHz}$ $L_s = 25.2\text{uH}$ $L_p = 311.0\text{mH}$ $C_s = 1.0\text{mF}$ $C_p = 81.95\text{nF}$ $R_s = 17.030\text{0k}\Omega\text{s}$ $R_p = 17.034\text{0k}\Omega\text{s}$ $\theta = 0.5\text{deg}$

Audio



Copyright 2018 GNU GPLv3

Sheet: /Audio/
File: audio.sch

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm

nicole.ferber@puri.sm

christian.schilmoeller@puri.sm

Size: A4	Date: 2018-08-14
----------	------------------

KiCad E.D.A.	kicad 5.0.0
--------------	-------------

Rev: v0.1.0

Id: 16/24

[illegible]

eric.kuzmenko@puri.sm
angus.ainslie@puri.sm
nicole.faeber@puri.sm
christian.schilmoeller@puri.sm

Id: 17/24

WLAN+BT M.2

RS9116 NC:
RTS, CTS, BT_HOST_WAKE

RS9116 datasheet says
no WIFI_WAKE
but the schematic has it


RedPine RS9116 MBO
Requires 5V on
Pin 54 if USB used

WLAN_D_P
WLAN_D_N
WIFI_CLK
WIFI_CMD
WIFI_DATA0
WIFI_DATA1
WIFI_DATA2
WIFI_DATA3
WIFI_WAKE


RedPine RS9116
has 100k pull-up to
3.3V making SDIO_RST
~2.55V when HIGH

MOD1801
WifiBTCard
WiFi + Bluetooth
M.2 Form Factor
Key ID "E"
width: 22 mm
length: 30 mm

Socket: Table 46
Module: Table 23
M.2 Key E

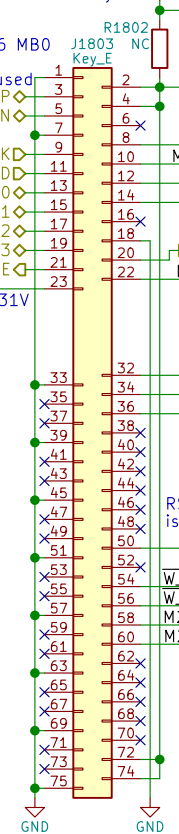

6.2 M.2 Signal Directions
UARTn_UFCR[DCEDTE]=0 on POR



Leave BT_DISABLE
LOW for RS9116

Pin 54 on RS9116 is
USB_VBUS Sink

RS9116 SUSCLK
is a GPIO (unused)
SUSCLK

W_DISABLE2
W_DISABLE1
M2_I2C_SDA
M2_I2C_SCL

Input pins are
interchangeable

BT_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

WIFI_DISABLE

Note:
All switches' pins
can be swapped
e.g. 2<->3
or 1<->3

SW1801A
WLAN_HKS

Open = ON
Closed = OFF

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

SW1801A
WLAN_HKS

SW1801B
WLAN_HKS

WLAN+BT M.2

Purism

Copyright 2018 GNU GPLv3

Sheet: /WLAN+BT M.2/

File: wifi_bt_m2.sch

Size: A4

Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 18/24

eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm



nicole.farber@puri.sm

christian.schilmoeller@puri.sm

christian.schilmoeller@puri.sm

TUSB1046 can be used for DP over USB-C

HDMI

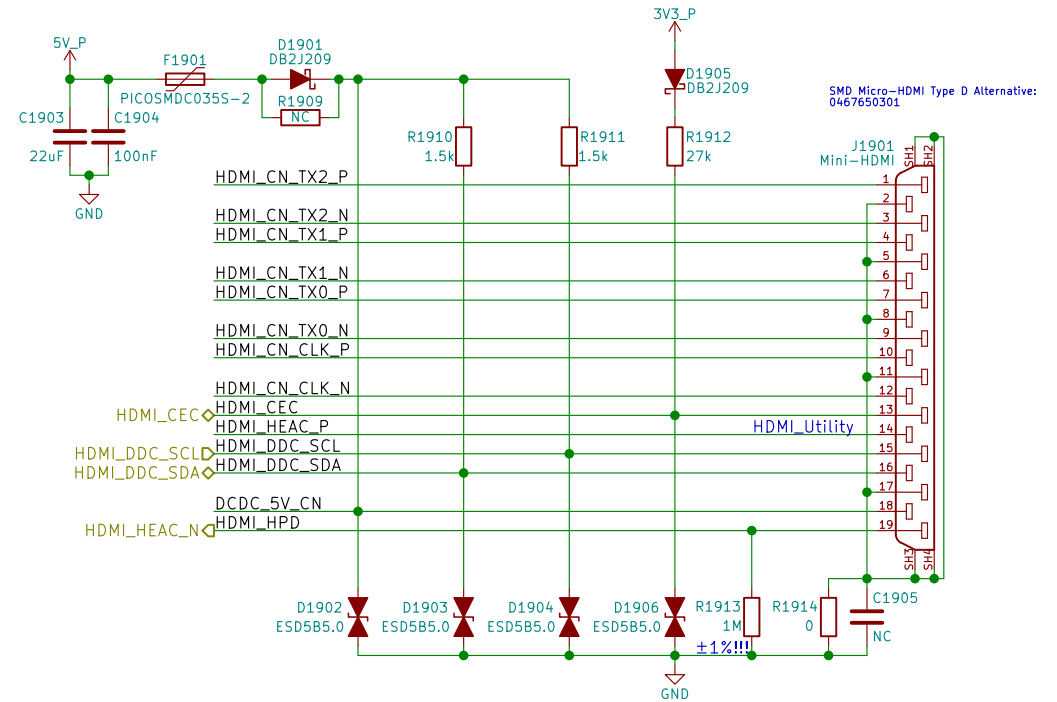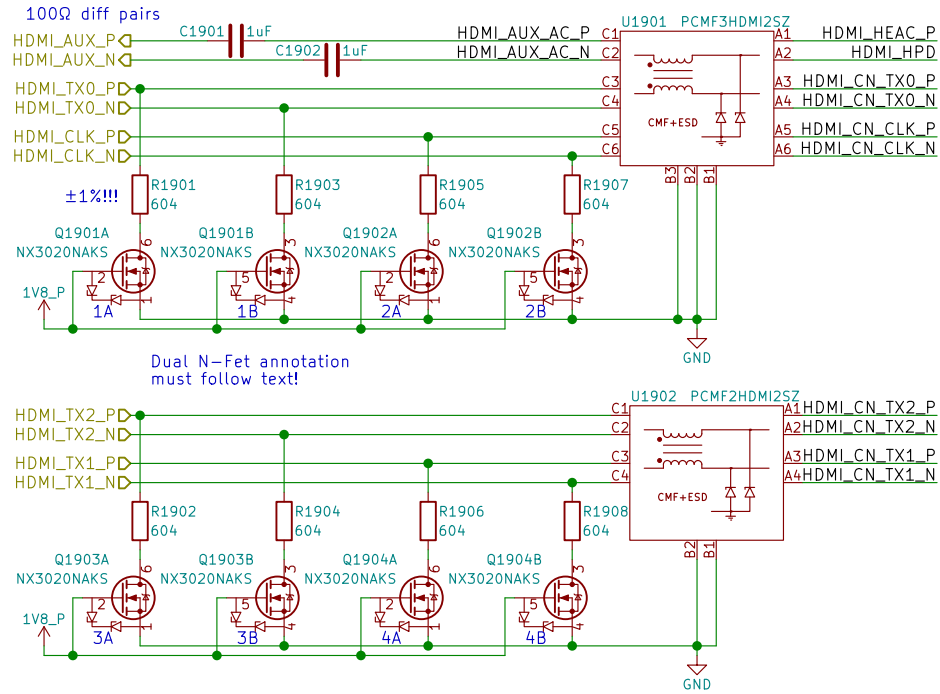

HDMI



Copyright 2018 GNU GPLv3

Sheet: /HDMI/
File: hdmi.sch

Size: A4
KiCad E.D.A. kicad 5.0.0


Date: 2018-08-14

Rev: v0.1.0
Id: 19/24

eric.kuzmenko@puri.sm
angus.ainstie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm


Sensors

Proximity & Ambient Light

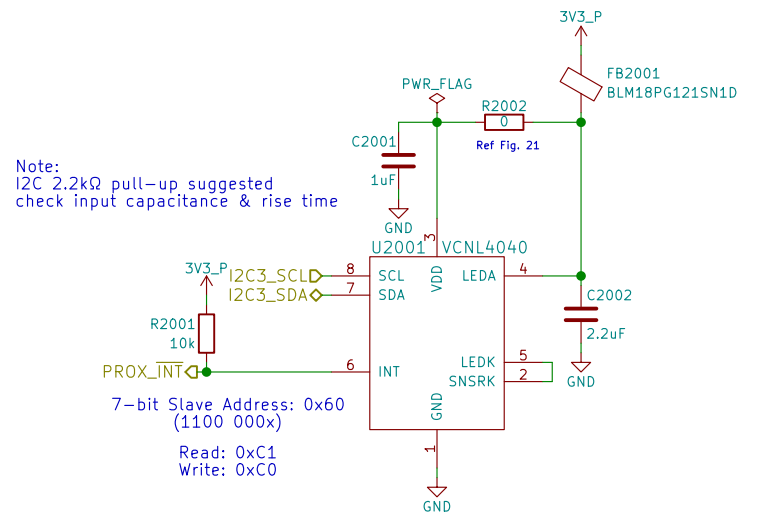


Reference:
<https://www.vishay.com/docs/84307/designingvcnl4040.pdf>
<http://www.vishay.com/docs/84931/vcni4040sensorboardfiles.pdf>

9-Axis IMU

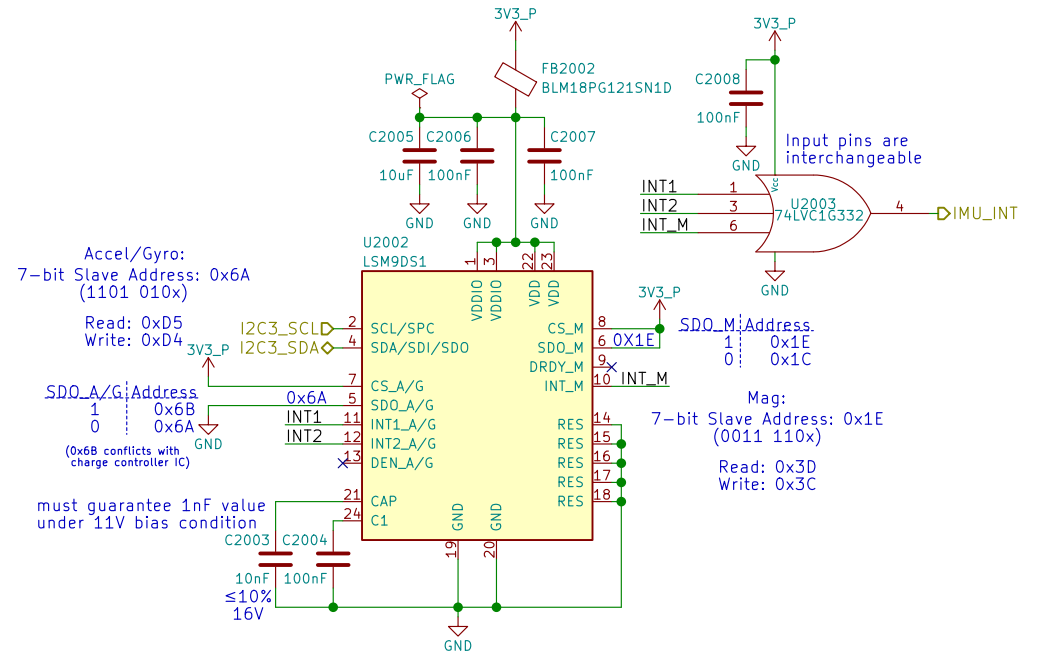

Reference:
<http://www.st.com/en/evaluation-tools/steval-mki159v1.html>

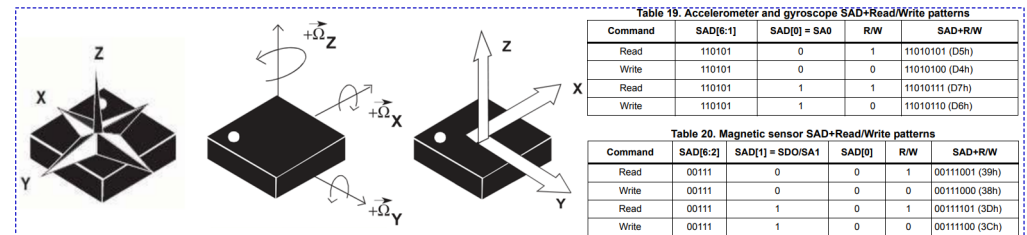

Sensors



Purism

Copyright 2018 GNU GPLv3

Sheet: /Sensors/
File: sensors.sch

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Size: A4	Date: 2018-08-14
----------	------------------

Size: A1	Date:
KiCad E.D.A.	kicad 5.0.0

Rev: v0.1.0

Id: 20/24

Id: 21/24


Smart Card



christian.schilmoeller@puri.sm

Id: 22/24

GNSS

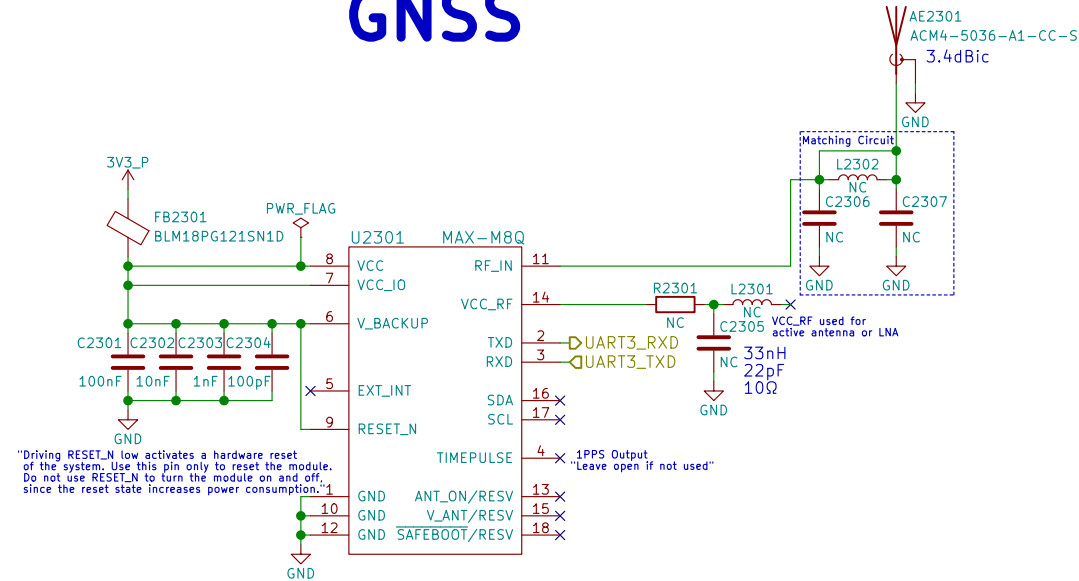

References:

https://www.u-blox.com/sites/default/files/MAX-M8_HardwareIntegrationManual_L%28UBX-13004876%29.pdf
https://www.u-blox.com/sites/default/files/MAX-8-M8-FW3_HardwareIntegrationManual_L%28UBX-15030059%29.pdf

GNSS



Copyright 2018 GNU GPLv3

Sheet: /GNSS/
File: gnss.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0


eric.kuzmenko@puri.sm
angus.ainstlie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 23/24

Haptic Motor

PWM pins occupied:
 GPIO1_I001 - LCD Backlight
 GPIO1_I013 - LED
 GPIO1_I014 - Ethernet (CLKO_25MHz)
 GPIO1_I015 - CSI (CLKO2)

PWM needed?
 Only needs to be toggled
 ON 1 sec, OFF 1 sec (0.5Hz)
 Can MUX as either
 GPIO or PWM2
 swapping with LED

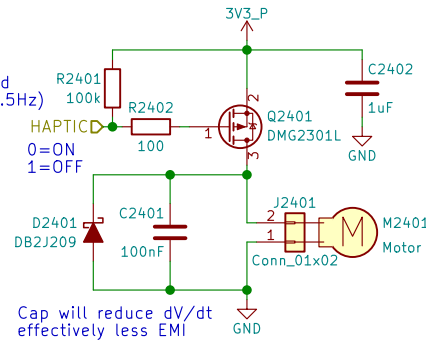

When the motor is off
 both terminals are at GND
 Motor will have wire leads
 with a 2-pin Molex or Boom Precision
 connector installed (by request)
 Metal housing is floating
 thick adhesive layer underneath
 (not connected to either pin)

Haptic/Vibration Motor



Copyright 2018 GNU GPLv3

Sheet: /Haptic Motor/
 File: haptic.sch

Size: A4 Date: 2018-08-14
 KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
 angus.ainslie@puri.sm
 nicole.farber@puri.sm
 christian.schilmoeller@puri.sm

Rev: v0.1.0
 Id: 24/24