


USB-C TCPC – Config Channel (CC) and PD Role Controller

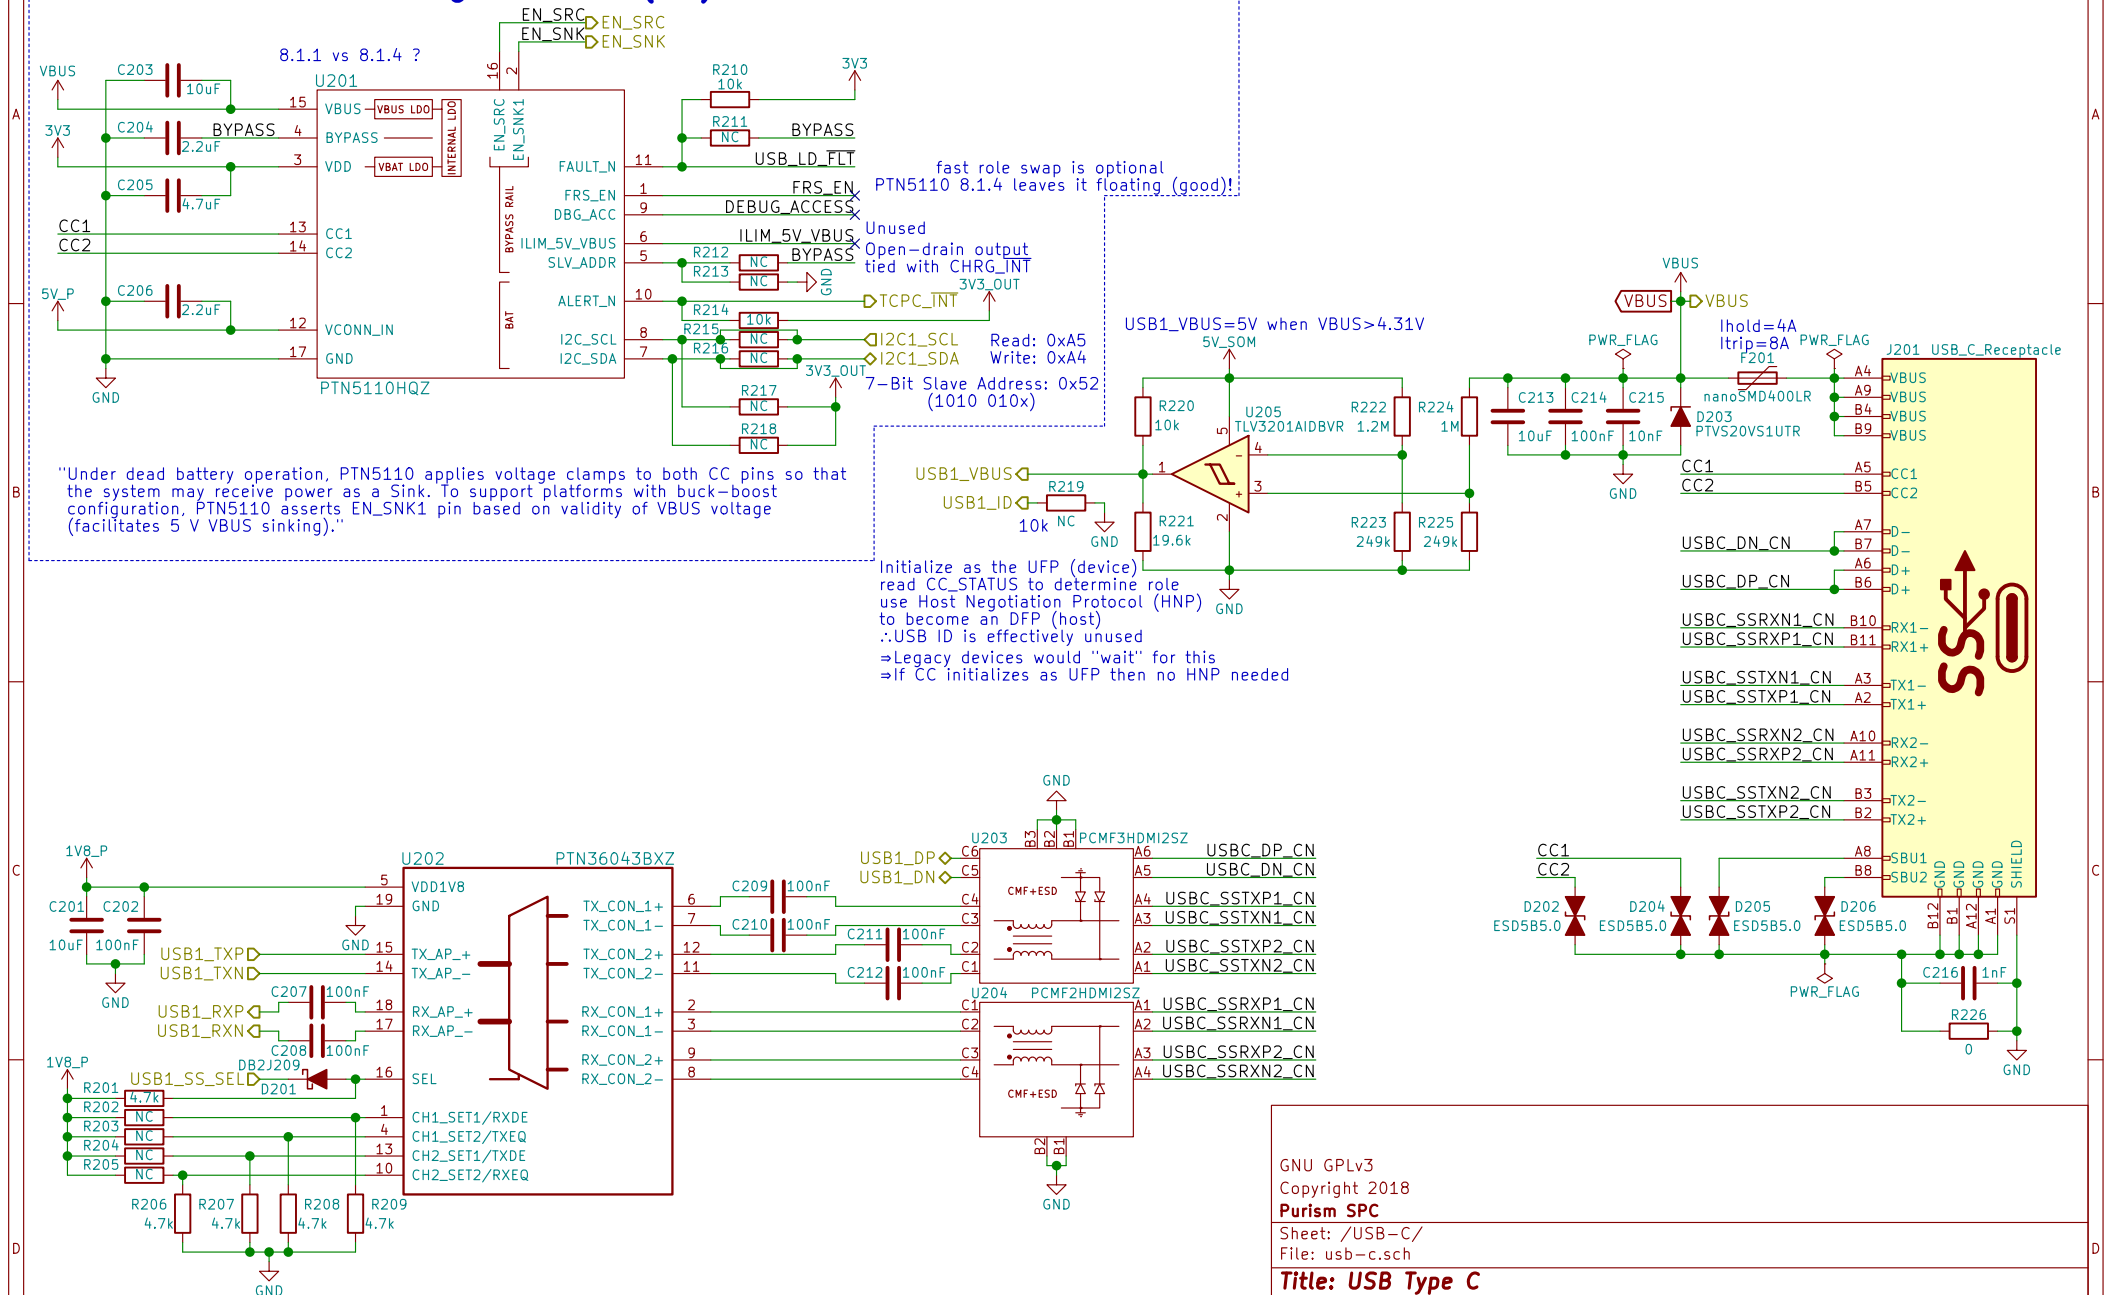

GNU GPLv3
Copyright 2018
Purism SPC
Sheet: /USB-C
File: usb-c.sch

Title: *USB Type C*

Size: A4	Date: 2018-06-07
KiCad E.D.A. kicad 4.0.6	

Rev: v0.1.0
Id: 2/24



Drawing ~333.33mA, VBAT.


or consuming $<1.2W$,
should give close to
10 hours going from
100% to 0% charge

 $1.658 < \mu_{LM} < 2.063$

VBUS

1(Lsat)

L301
1 μ H

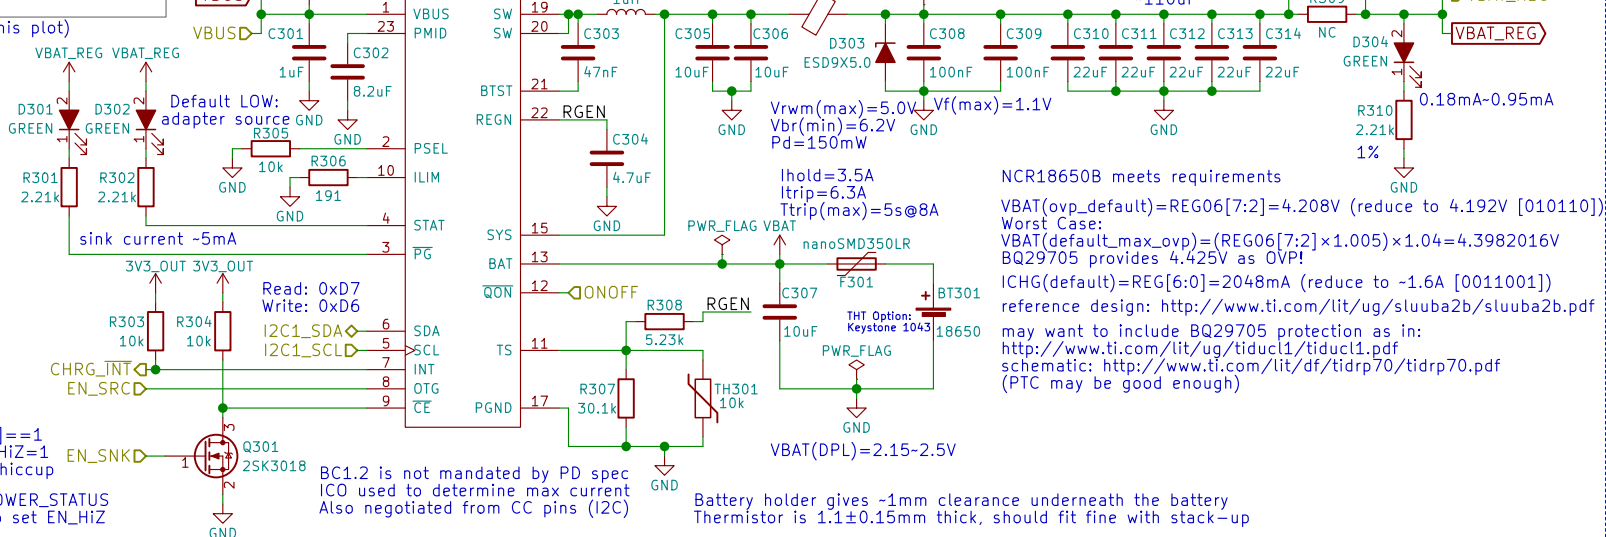

VBAT(ovp_default)=(REG06[7:2]=4.208V (reduce to 4.192V [010110]))
Worst Case:
VBAT(default_max_ovp)=(REG06[7:2]×1.005)×1.04=4.3982016V
BQ29705 provides 4.425V as OVP!
ICHG(default)=REG[6:0]=2048mA (reduce to -1.6A [0011001])
reference design: <http://www.ti.com/lit/ug/sluuba2b/sluuba2b.pdf>
may want to include BQ29705 protection as in:
<http://www.ti.com/lit/ug/tiduc11/tiduc11.pdf>
schematic: <http://www.ti.com/lit/df/tidrp70/tidrp70.pdf>
(PTC may be good enough)

Battery holder seems to fit up to ~68.88mm long batteries

Purism SPC

Sheet: /Battery/

Title: Battery


Size: A4

KiCad E.D.A.	kiCad 4.0.6
--------------	-------------


4

Id: 3/24


3.3V/3A

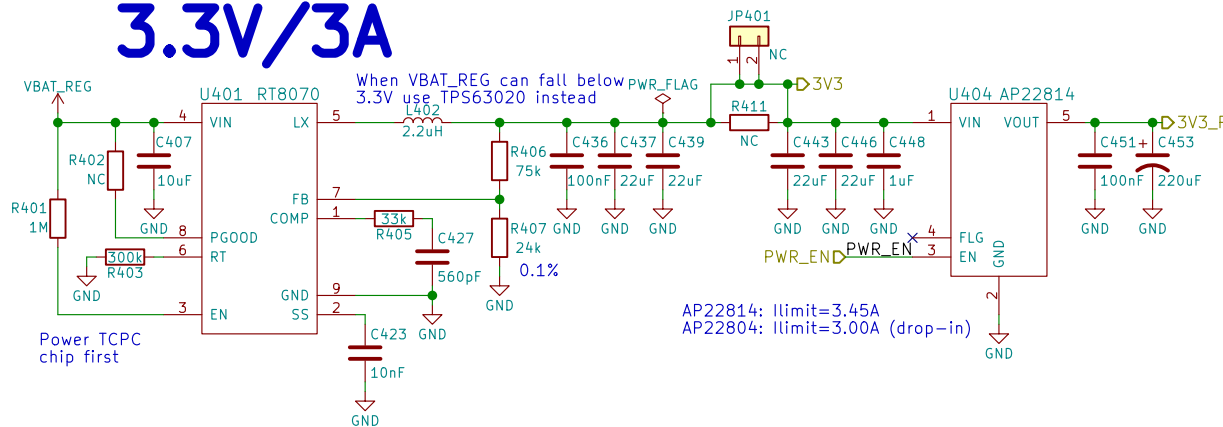


1.8V/600mA

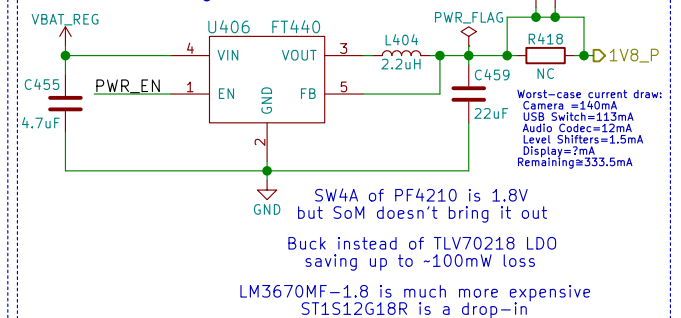



5.0V/3.8A

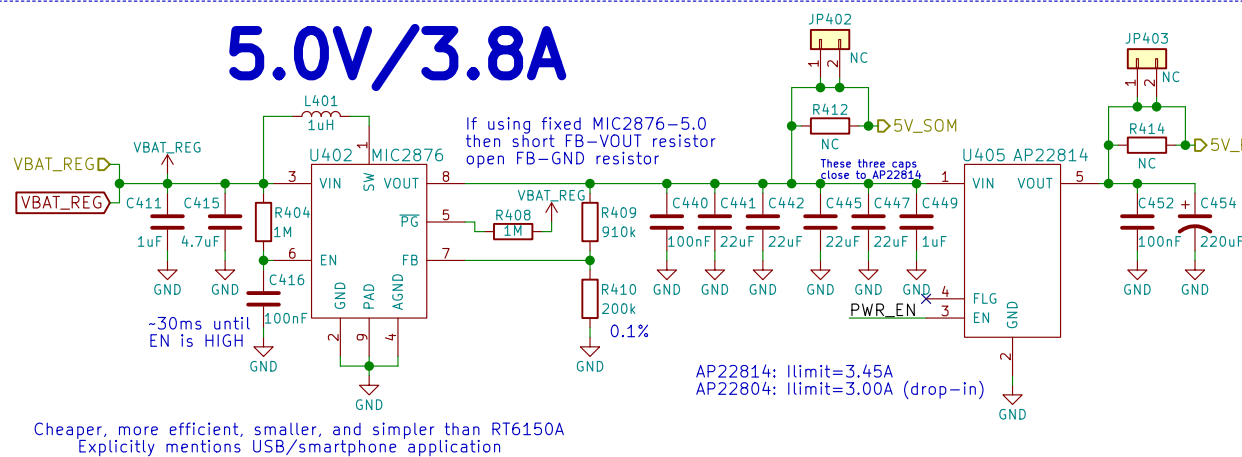

22.4V/40mA

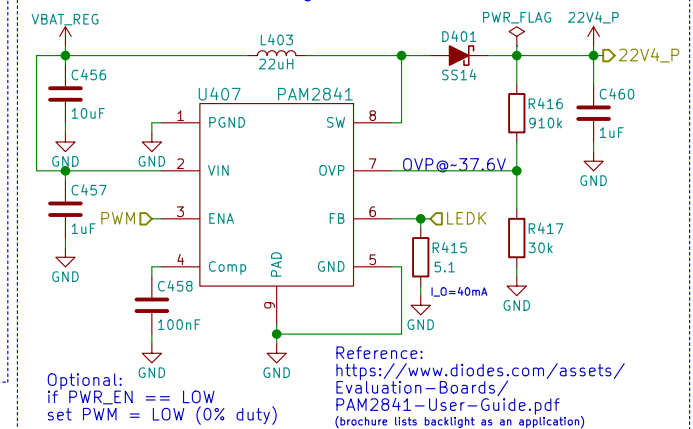

2.8V/150mA

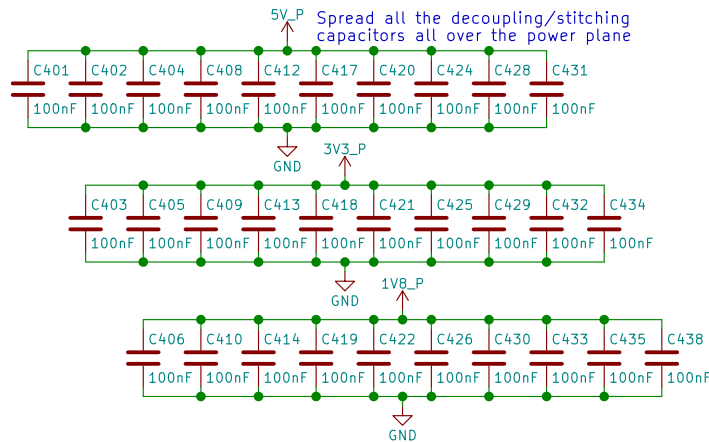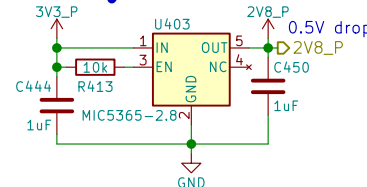

GNU GPLv3
Copyright 2018
Purism SPC

Sheet: /Power/
File: power.sch



Title: Power

Size: A4
KiCad E.D.A. kicad 4.0.6

Date: 2018-06-07

Rev: v0.1.0





Id: 4/24

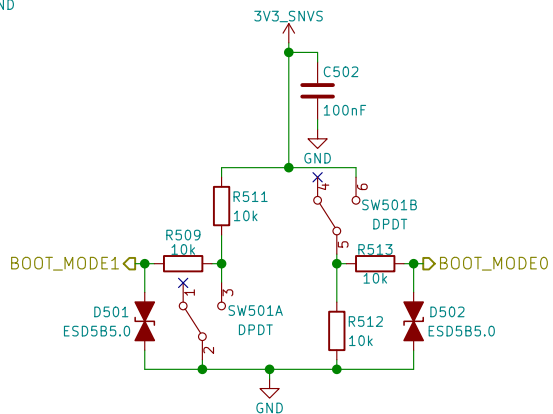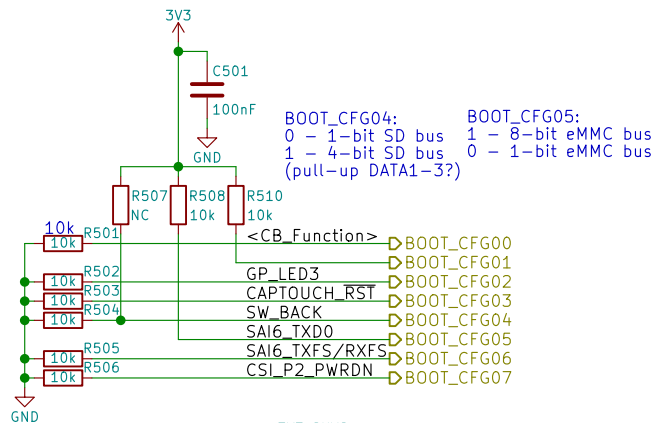

2->1: eMMC 2->3: USB (Serial Downloader)	
BOOT_MODE[1:0]	Boot Type
00	Boot From Fuses
01	Serial Downloader
10	Internal Boot
11	Reserved

Only eMMC	
BOOT_CFG[14:12]	Boot device
001	SD/eSD
010	MMC/eMMC
011	NAND

Fuse	Config	Definition	GPIO ¹	Shipped value	Settings
BOOT_CFG[11:10]	OEM	USDHC port selection	Yes	00	00 - USDHC-1 01 - USDHC-2 10 - USDHC-3 else - reserved

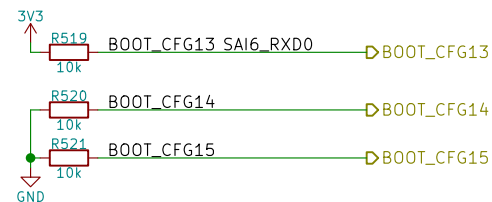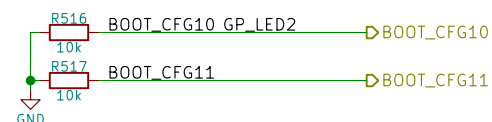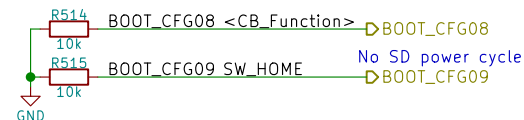

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /Boot Config/
File: boot.sch


Title: Boot Configuration

Size: A4 Date: 2018-06-07


KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 5/24

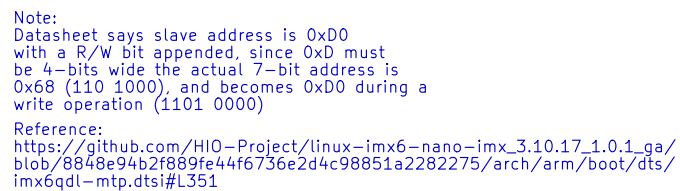

Id: 6/24

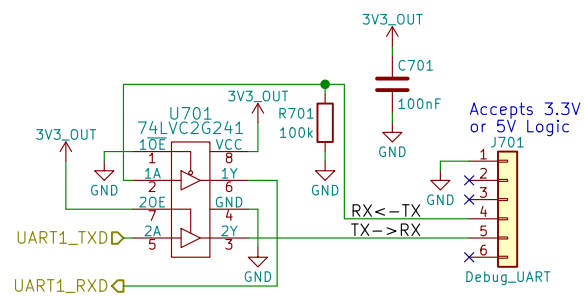

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /UART Debug/
File: uart.sch

Title: UART Debug

Size: A4 Date: 2018-06-07

KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 7/24




GNU GPLv3
Copyright 2018
Purism SPC
Sheet: /JTAG/
File: jtag.sch


Title: JTAG



Size: A4
KiCad E.D.A. kicad 4.0.6

Date: 2018-06-07

Rev: v0.1.0
Id: 8/24





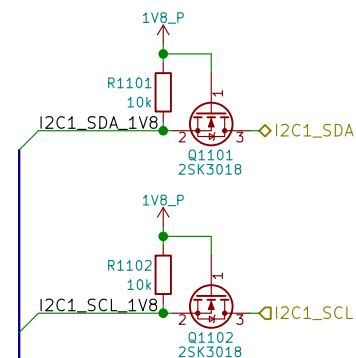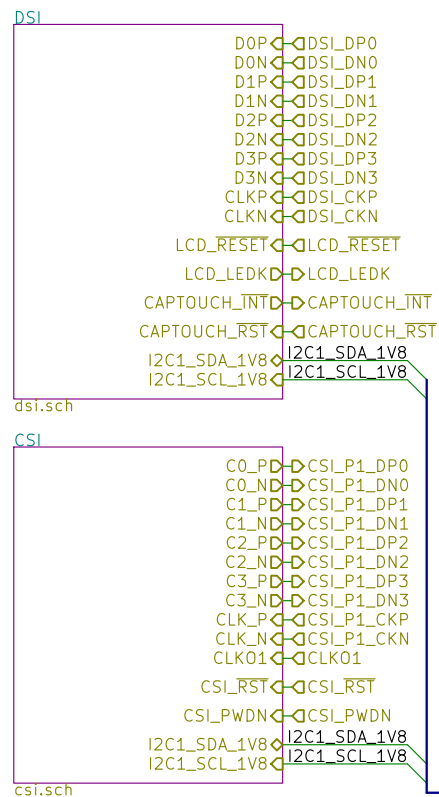

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /MIPI/
File: mipi.sch


Title: MIPI

Size: A4 Date: 2018-06-07

KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0


Id: 11/24

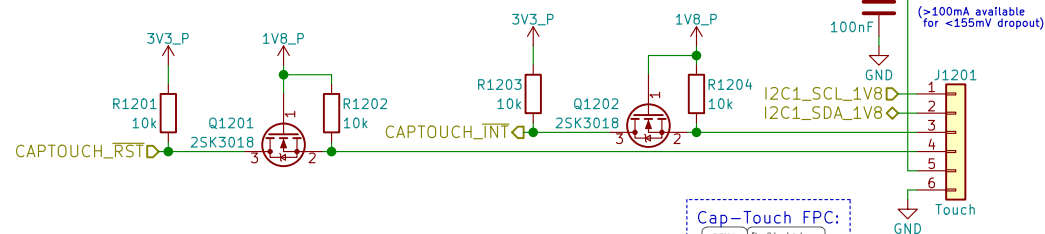


The upper 7 bits are the address, and bit 0 is used to select read or write. GT5688 has two slave device addresses to choose from:

INT	7-Bit Address	8-Bit Write Address	8-Bit Read Address
LOW	0x5D	0xBA	0xBB
HIGH	0x14	0x28	0x29

Every time you power on or reset, you need to use the INT pin to set the I2C address:


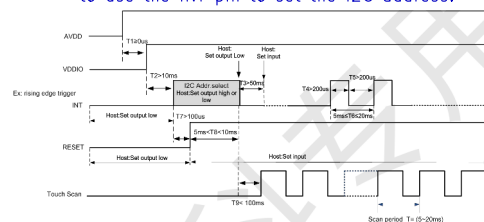


Pin#	Definition
1	SCL
2	SDA
3	INT
4	RESET
5	VDD2_R5
6	GND






LCD PN:
Shenzhen Jinghong Electronics Co., Ltd.
JH057N00900

Note:
No power-up sequence is given in the spec sheet

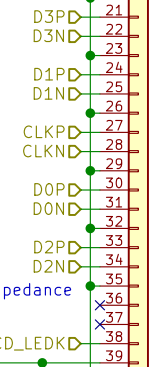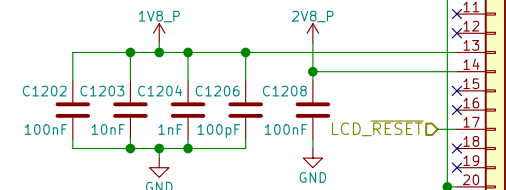

100Ω Differential Impedance

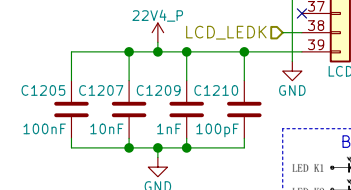

GNU GPLv3
Copyright 2018
Purism SPC


Sheet: /MIPI/DSI/
File: dsi.sch

Title: MIPI DSI

Size: A4 Date: 2018-06-07
KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0
Id: 12/24

Using Internal DVDD 1.5V Regulator:

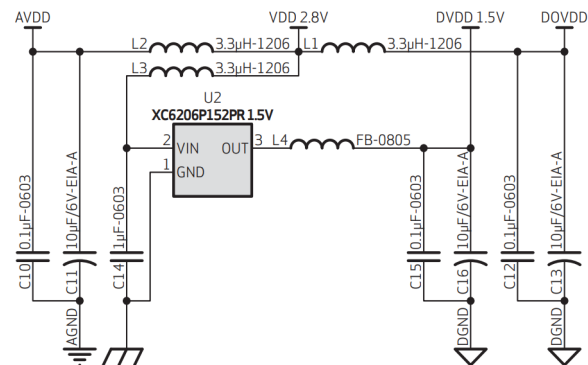

2.7 POWER UP SEQUENCE

Based on the system power configuration (1.8V or 2.8V for I/O power, using external DVDD or internal DVDD, requiring access to the I2C during power up period or not), the power up sequence will differ. If 1.8V is used for I/O power, using the internal DVDD is preferred. If 2.8V is used for I/O power, due to a high voltage drop at the internal DVDD regulator, there is a potential heat issue. Hence, for a 2.8V power system, OmniVision recommends using an external DVDD source. Due to the higher power down current when using an external DVDD source, OmniVision strongly recommends cutting off all powers, including the external DVDD, when the sensor is not in use in the case of 2.8V I/O and external DVDD.

2.7.1 POWER UP WITH INTERNAL DVDD

For powering up with the internal DVDD and I2C access during the power ON period, the following conditions must occur:


1. when DOVDD and AVDD are turned ON, make sure DOVDD becomes stable before AVDD becomes stable
2. PWDN is active high with an asynchronized design (does not need clock)
3. PWDN pin tied to digital ground if it is not controlled.
4. if PWDN pin is controlled as below, for PWDN to go low, power must first become stable (AVDD to PWDN ≥ 5 ms)
5. RESETB is active low with an asynchronized design
6. master clock XVCLK should provide at least 1 ms before host accesses the sensor's registers
7. host can access I2C bus (if shared) during entire period. 20ms after RESETB goes high, host can access the sensor's registers to initialize sensor

figure 2-3 power up timing with internal DVDD



note $t_0 \geq 0$ ms, delay from DOVDD stable to AVDD stable, it is recommended to power up AVDD shortly after DOVDD has been powered up
 $t_1 \geq 0$ ms, delay from XVCLK off to AVDD off
 $t_2 \geq 5$ ms, delay from AVDD stable to sensor power up stable, PWDN can be pulled low after this point. XVCLK can be turned on after power on
 $t_3 \geq 1$ ms, delay from sensor power up stable to RESETB pull up
 $t_4 \geq 20$ ms, delay from RESETB pull high to SCCB initialization
 $t_5 \geq 0$ ms, delay from AVDD off to DOVDD off
 $t_6 \geq 0$ ms, delay from RESETB pull low to AVDD off

5640_05_2-2

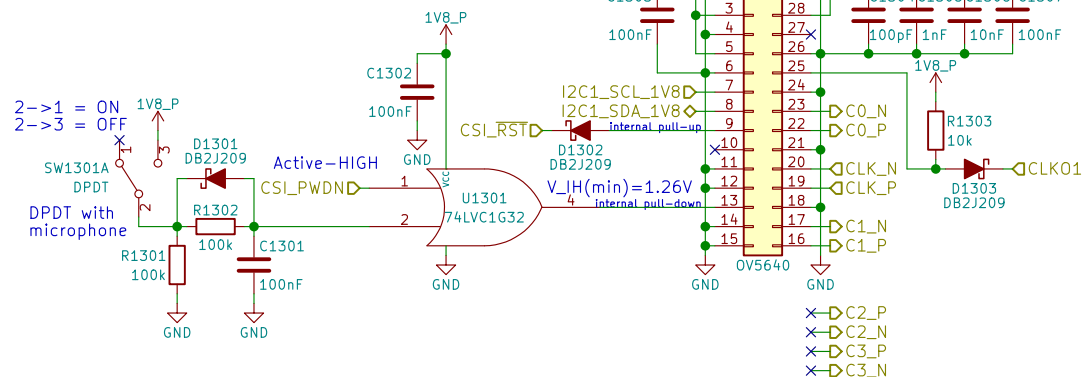

Camera PN:
Truly C08725-B5SA-E
7-bit Slave Address: 0x78
(1111 000x)
Read: 0xF1
Write 0xF0

OV5640 CMOS Image Sensor Datasheet:
https://cdn.sparkfun.com/datasheets/Sensors/LightImaging/OV5640_datasheet.pdf

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /MIPI/CSI/
File: csi.sch


Title: MIPI CSI

Size: A4 Date: 2018-06-07


KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 13/24

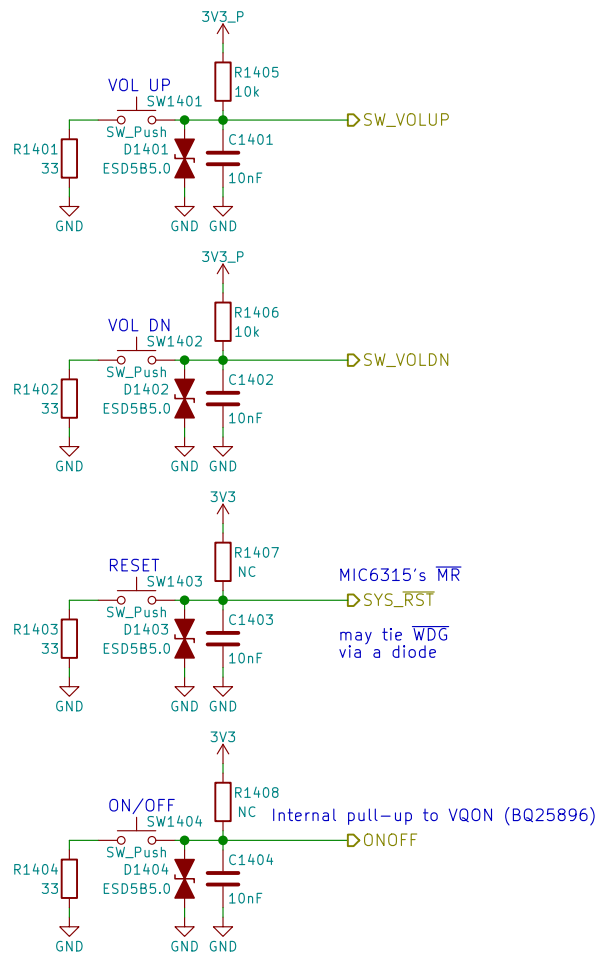

Use PWM2_PWMSAR to set the compare value (duty cycle)
 Use PWM2_PWMCR[15:4] to set the PRESCALER (frequency)
 Use PWM2_PWMPR to set the top of the counter (frequency)

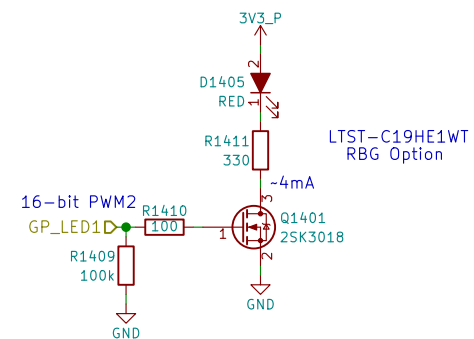

GNU GPLv3
 Copyright 2018

Purism SPC

Sheet: /Buttons & LED/
 File: buttons_led.sch


Title: Buttons & LED

Size: A4 Date: 2018-06-07


KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 14/24

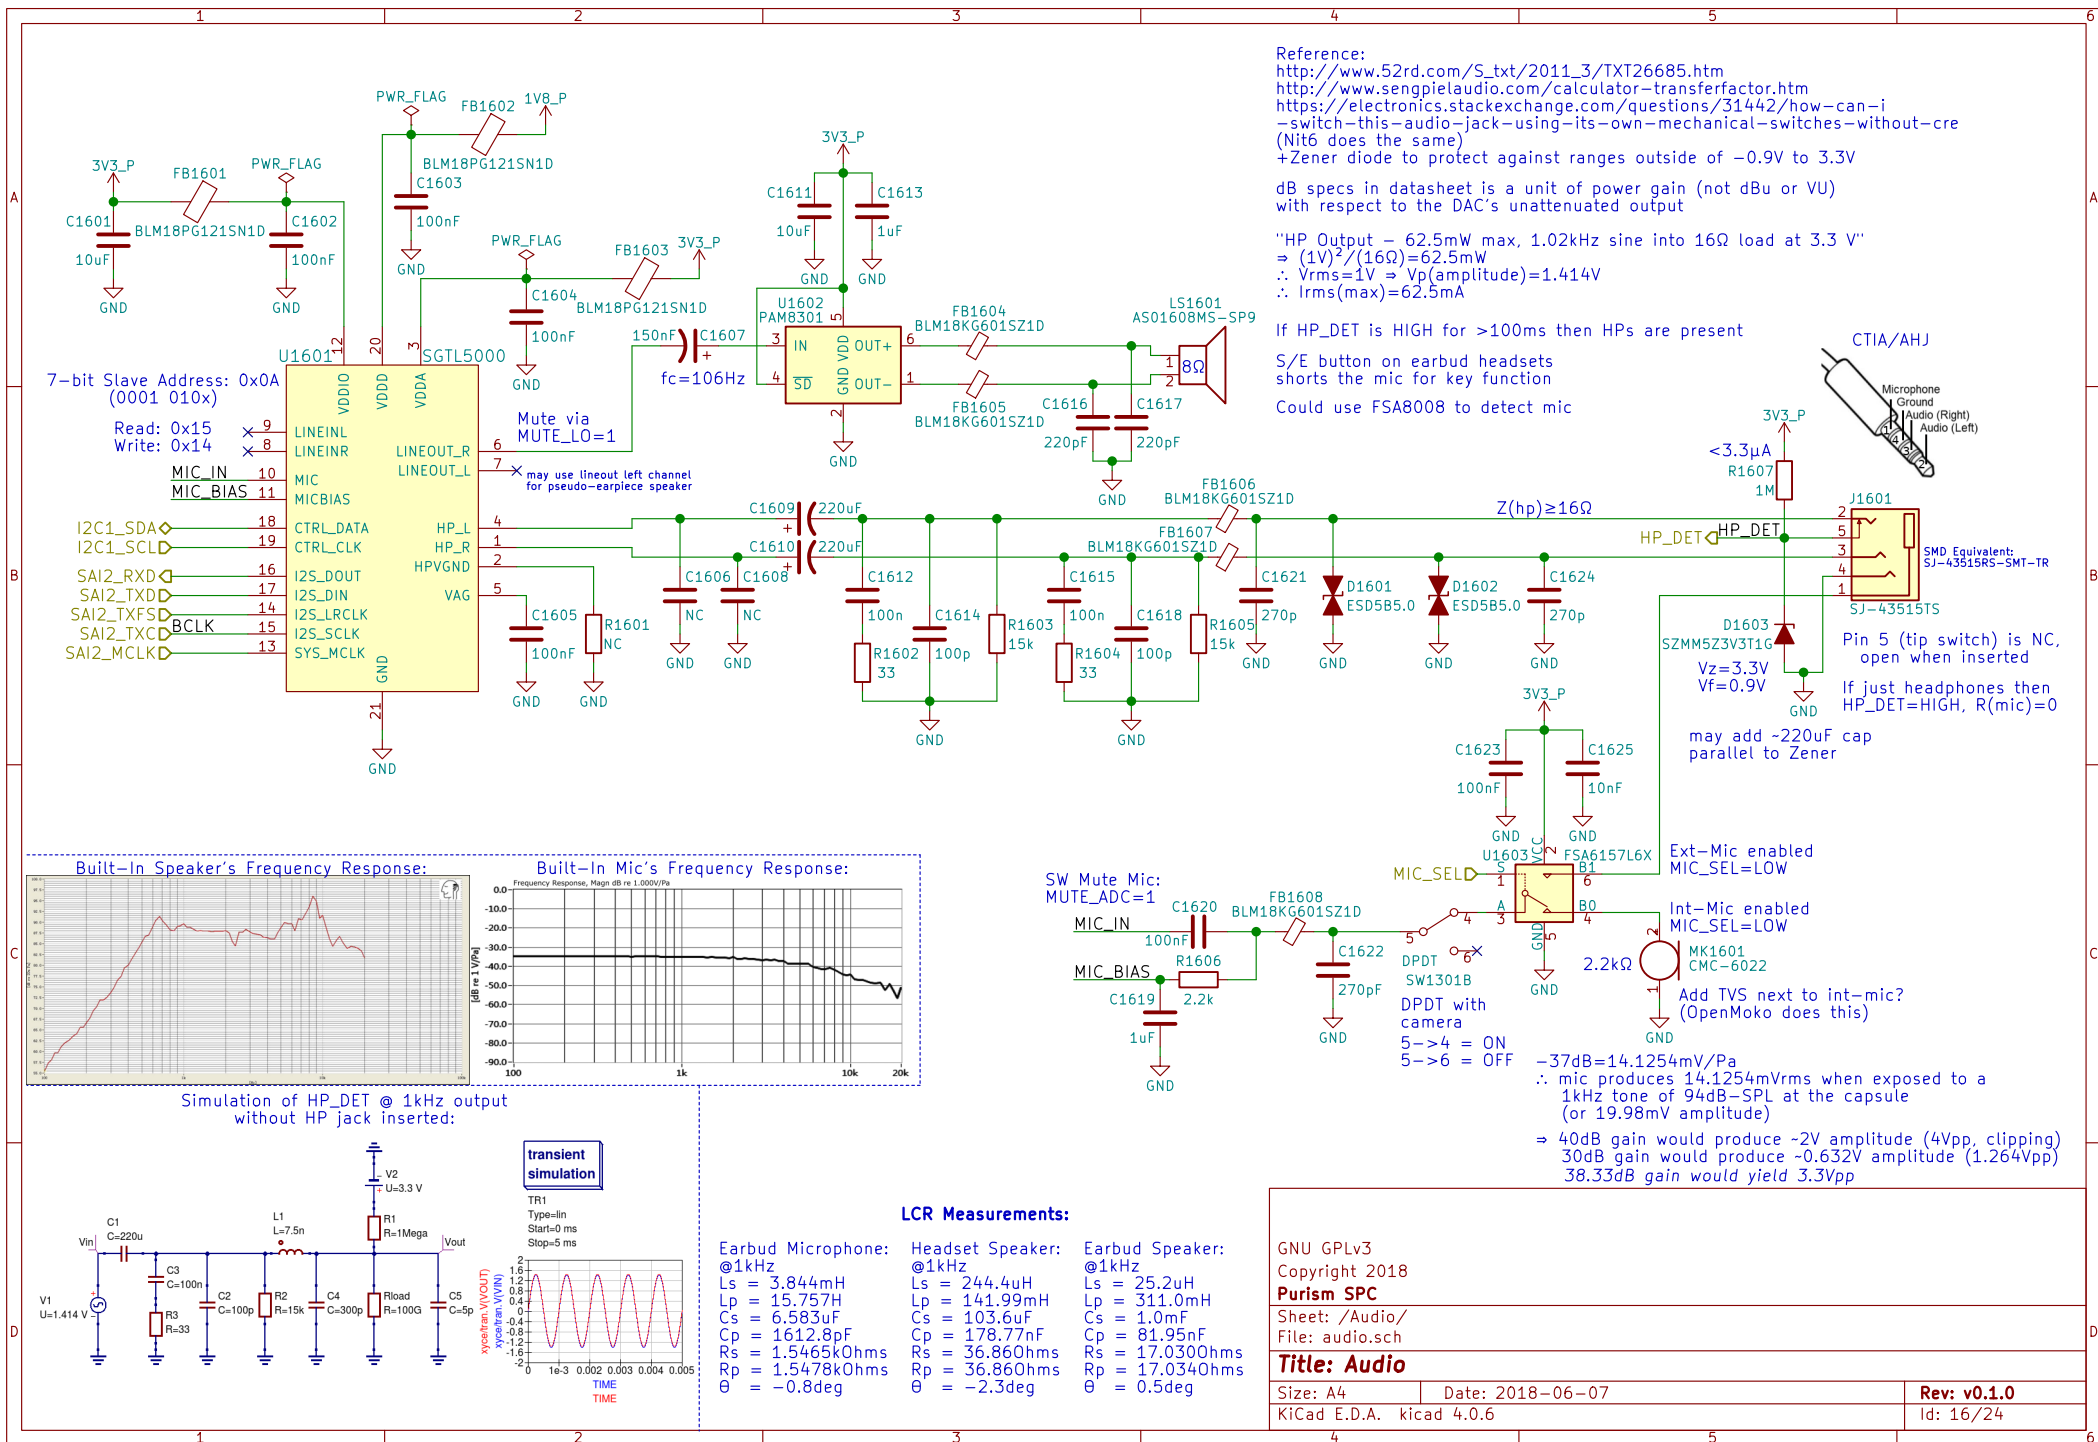

RGMII 10/100/1000 Ethernet

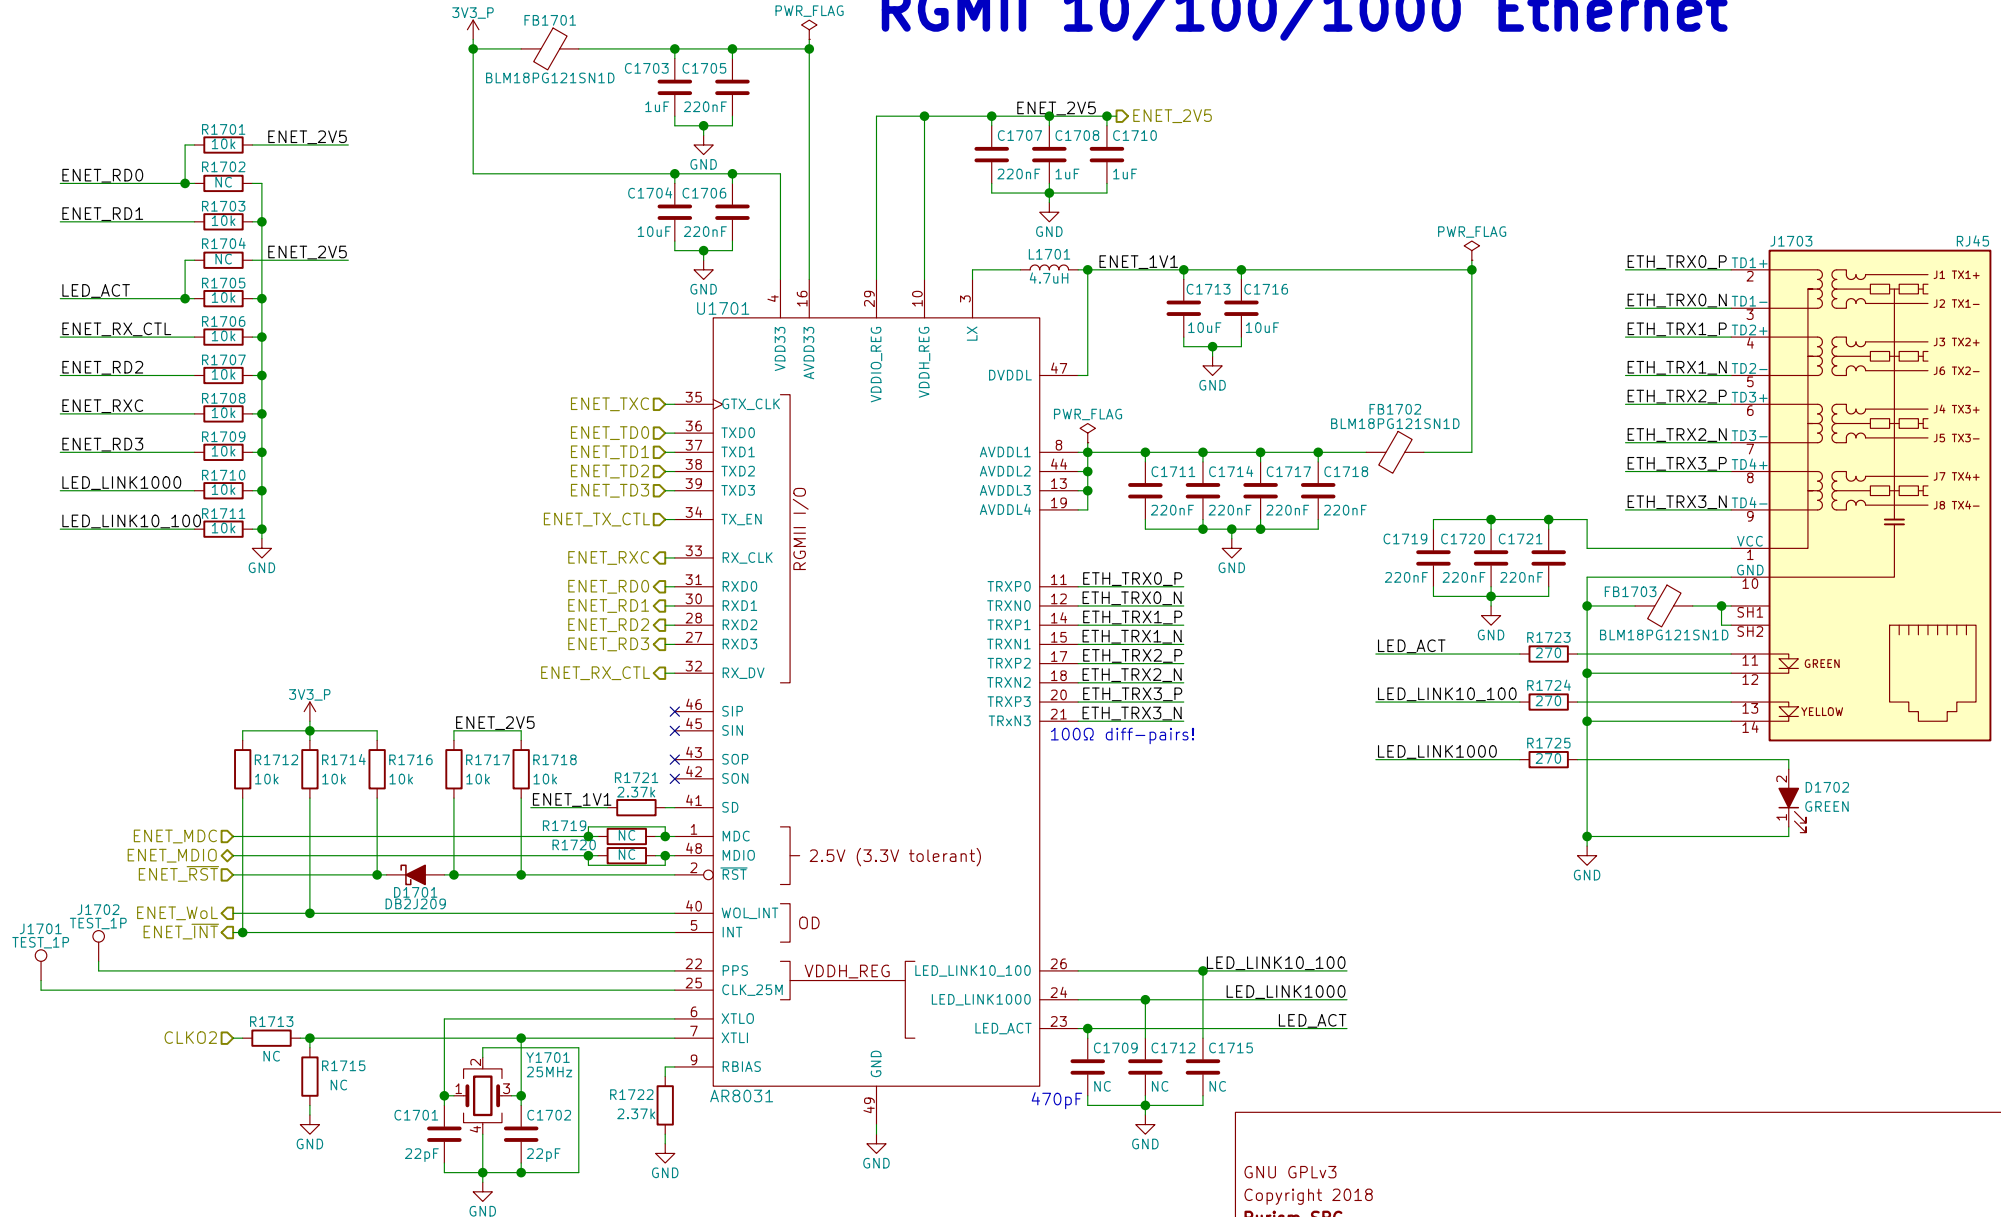

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /Ethernet/
File: ethernet.sch

Title: Ethernet

Size: A4 Date: 2018-06-07
KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0
Id: 17/24

RS9116 NC:
RTS, CTS, BT_HOST_WAKE

RS9116 datasheet says
no WIFI_WAKE
but the schematic has it

RedPine RS9116 MB0
Requires 5V on
Pin 54 for USB!

RedPine RS9116
has 100k pull-up to
3.3V making SDIO_RST
~2.55V when HIGH

Module: Table 23
Socket: Table 46
M.2 Key E

3V3_P

1V8_P

VIH=2.31V

WIFI_RST

WIFI_CLK

WIFI_CMD

WIFI_DATA0

WIFI_DATA1

WIFI_DATA2

WIFI_DATA3

WIFI_WAKE

BT_HOST_WAKE

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT

BT_UART_RXD

BT_UART_TXD

BT_UART_RTS

BT_UART_CTS

W_DISABLE1

W_DISABLE2

W_DISABLE1

M2_I2C_SDA

M2_I2C_SCL

M2_PCM_CLK

M2_PCM_SYNC

M2_PCM_IN

M2_PCM_OUT



BT_UART_RXD

</

TUSB1046 can be used for DP over USB-C

Layout Note:
May need swap some signals
due to micro-HDMI pinout diff
depending on pin location/routing

100Ω diff pairs

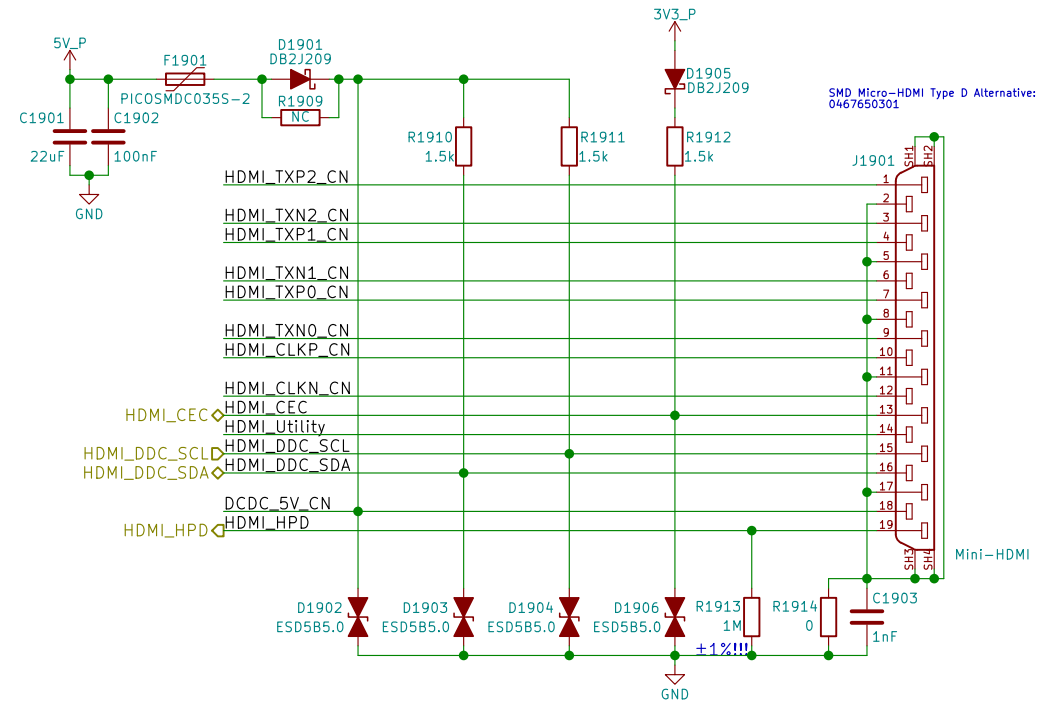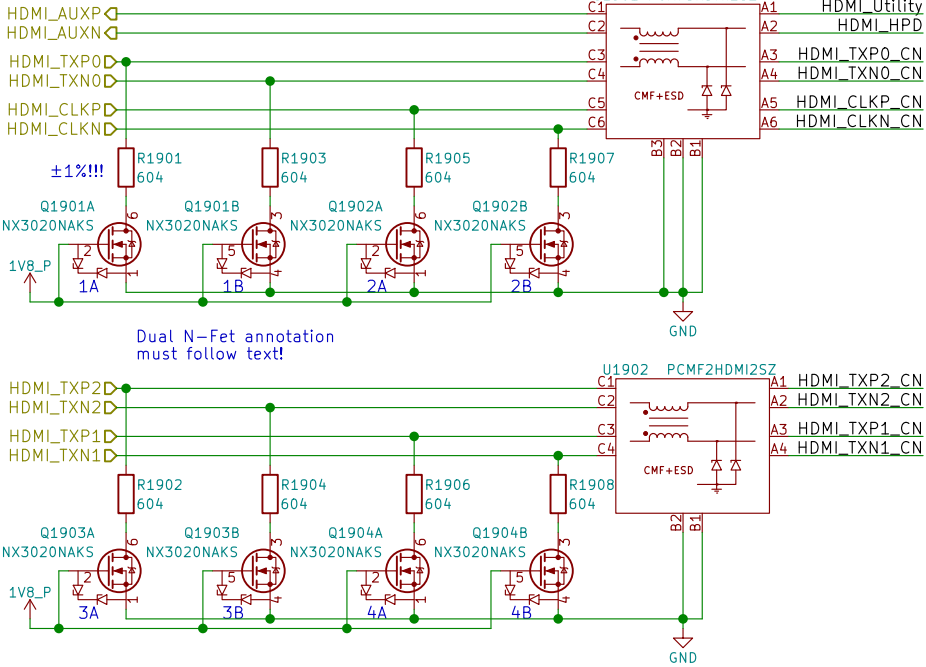

GNU GPLv3
Copyright 2018

Purism SPC

Sheet: /HDMI/
File: hdmi.sch

Title: HDMI

Size: A4 Date: 2018-06-07


KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 19/24


Proximity & Ambient Light

Note:
I2C 2.2kΩ pull-up suggested
check input capacitance & rise time

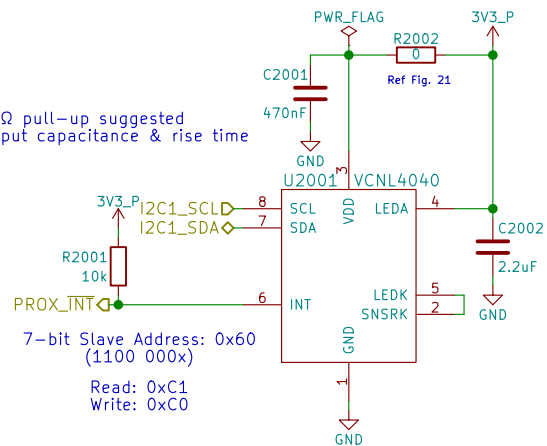

Reference:
<https://www.vishay.com/docs/84307/designingvcnl4040.pdf>
<http://www.vishay.com/docs/84931/vcnl4040sensorboardfiles.pdf>

9-Axis IMU

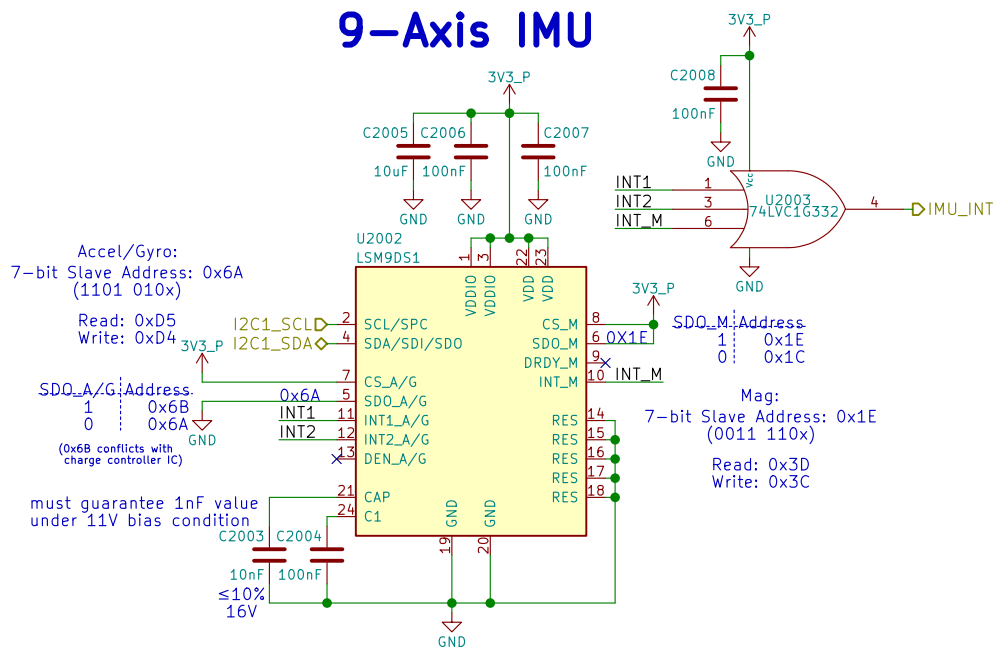

Reference:
<http://www.st.com/en/evaluation-tools/steval-mki159v1.html>

Command	SAD[6:1]	SAD[0] = SA0	R/W	SAD+R/W
Read	110101	0	1	11010101 (D5h)
Write	110101	0	0	11010100 (D4h)
Read	110101	1	1	11010111 (D7h)
Write	110101	1	0	11010110 (D6h)

Command	SAD[6:2]	SAD[1] = SDO/SA1	SAD[0]	R/W	SAD+R/W
Read	00111	0	0	1	00111001 (39h)
Write	00111	0	0	0	00111000 (38h)
Read	00111	1	0	1	00111101 (3Dh)
Write	00111	1	0	0	00111100 (3Ch)


GNU GPLv3
Copyright 2018
Purism SPC

Sheet: /Sensors/
File: sensors.sch

Title: Sensors

Size: A4 Date: 2018-06-07
KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0
Id: 20/24

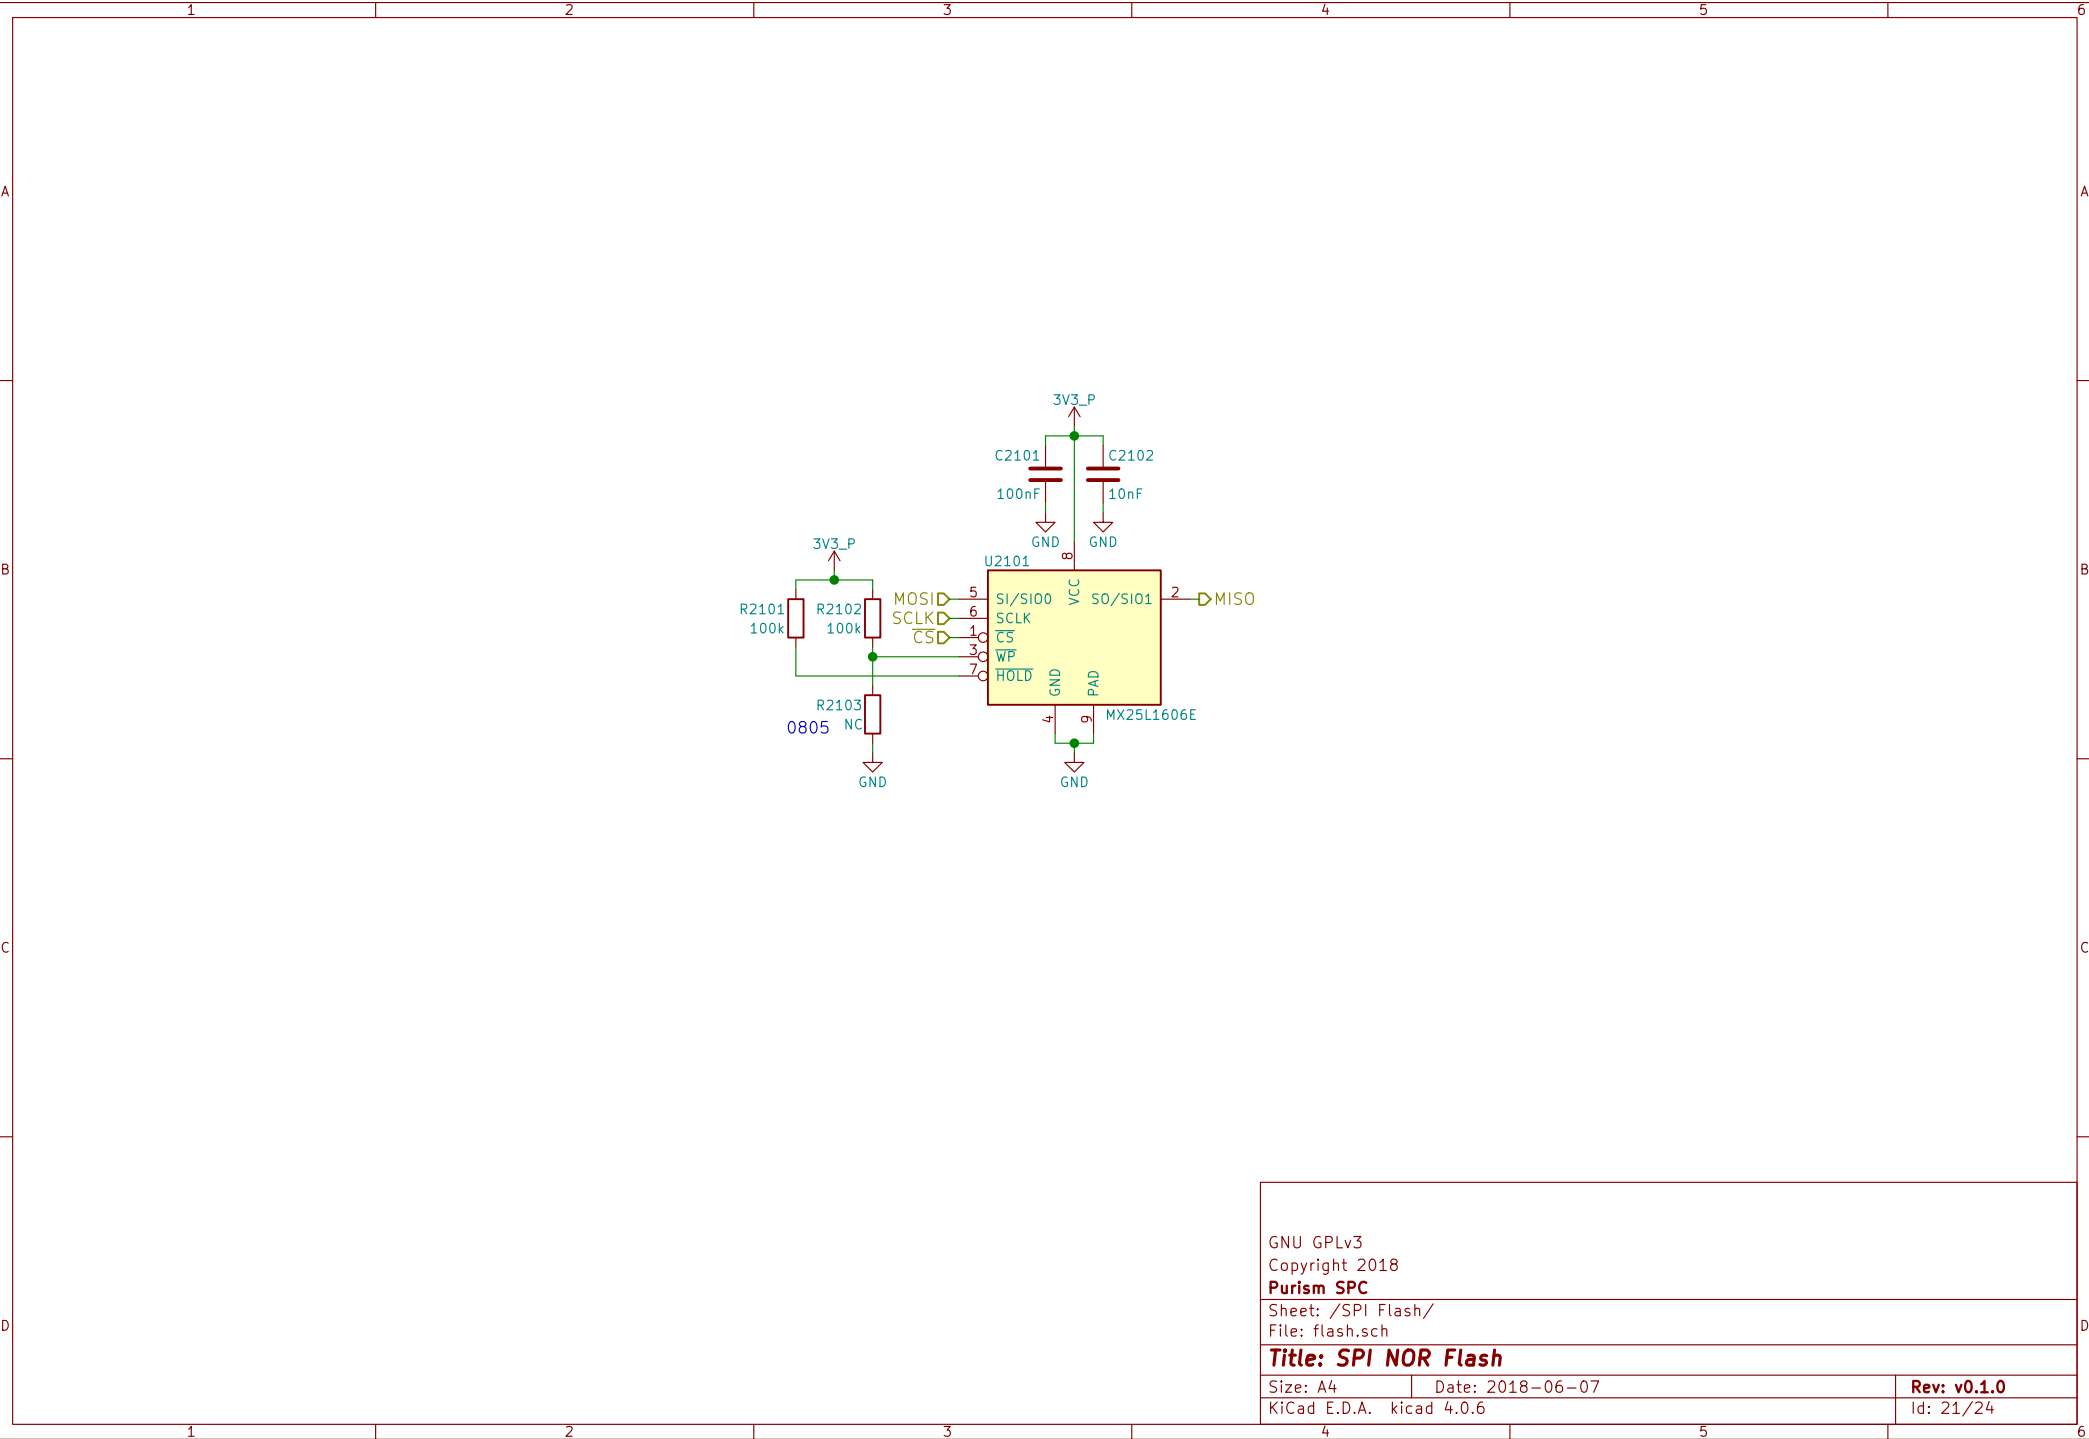

GNU GPLv3

Copyright 2018

Purism SPC

Sheet: /SPI Flash/

File: flash.sch

Title: SPI NOR Flash

Size: A4

Date: 2018-06-07


Rev: v0.1.0

KiCad E.D.A. kicad 4.0.6

Id: 21/24



Id: 22/24

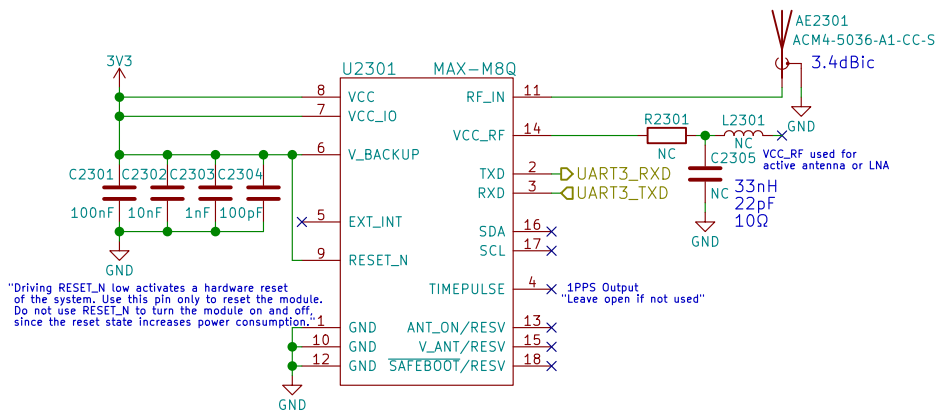

Reference:
https://www.u-blox.com/sites/default/files/MAX-8-M8-FW3_HardwareIntegrationManual_1503005929.pdf

GNU GPLv3
 Copyright 2018
Purism SPC

Sheet: /GNSS/
 File: gnss.sch

Title: GNSS

Size: A4 Date: 2018-06-07


KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 23/24

PWM pins occupied:
 GPIO1_I001 - LCD Backlight
 GPIO1_I013 - LED
 GPIO1_I014 - Ethernet (CLKO_25MHz)
 GPIO1_I015 - CSI (CLKO2)

PWM needed?
 Only needs to be toggled
 ON 1 sec, OFF 1 sec (0.5Hz)
 Can MUX as either
 GPIO or PWM2
 swapping with LED



When the motor is off
 both terminals are at GND

Motor will have wire leads
 with a 2-pin Molex or Boom Precision
 connector installed (by request)!

Cap will reduce dV/dt
 effectively less EMI

Cheaper Motor Connector:
https://lcsc.com/product-detail/1-25T-Connectors_1-25T-1-2AW_C10832.html

Motor Source:
https://www.alibaba.com/product-detail/Coin-motor-vibration-dc-motor-cellphone_1994583657.html?spm=a2700.8443308.0.0.5aa13e5f1wxHgs

Motor Datasheet:
<https://cloud.puri.sm/s/z8JR6DJ4KrJYzoW>

Motor PN:
 BY0820Z021L20

GNU GPLv3
 Copyright 2018

Purism SPC

Sheet: /Haptic Motor/
 File: haptic.sch

Title: Haptic/Vibration Motor

Size: A4 Date: 2018-06-07

KiCad E.D.A. kicad 4.0.6

Rev: v0.1.0

Id: 24/24