



## **MIPI**

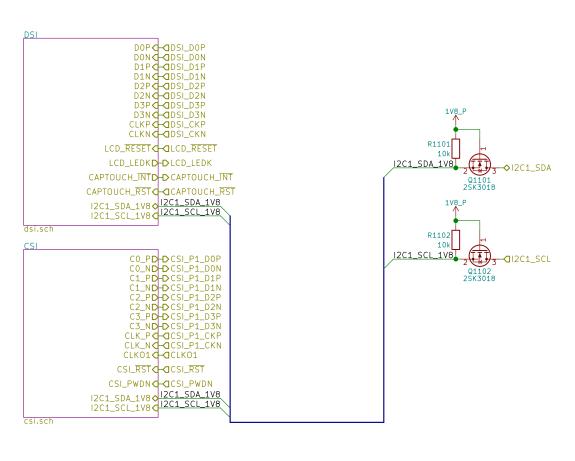


Purism		eric.kuzmenko@puri.sm angus.ainslie@puri.sm nicole.faerber@puri.sm		
Copyright 2018 GNU GPLv3		christian.schilmoeller@puri.sm		ı
Sheet: /MIPI/ File: mipi.sch				
Size: A4	Date: 2018-06-14		Rev: v0.1.0	
KiCad E.D.A. kid	ad 4.0.7		ld: 11/24	

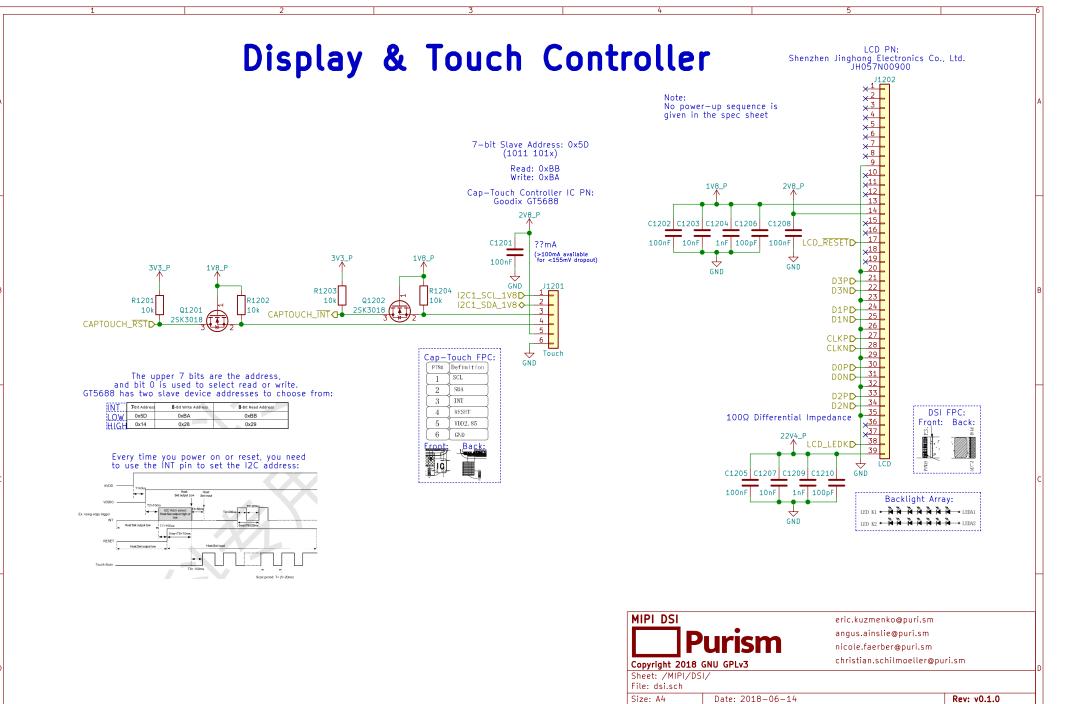

KiCad E.D.A. kicad 4.0.7

ld: 12/24



### Camera

Read: 0xF1 Write 0xF0 2V8\_P Max ~42mA Note: All switches' pins C1303 can be swapped e.g. 2 < -> 3100nF or 1<->3 (+mic) 12C1 SCL 1V8D 23 DC0\_N 22 DC0\_P  $2->1 = 0N 1V8_P$  2->3 = 0FF100nF I2C1\_SDA\_1V8 > R1303 10k 21 DB2J209 Active-HIGH SW1301A D1303 19 | **O**CLK\_P V\_IH(min)=1.26V DPDT CSL\_PWDND U1301 18 DPDT with 17 DC1\_N 4LVC1G32 microphone 16 DC1\_P 100k C1301 GND 0V5640 100k GND GND Input pins are interchangeable **X-D** C2\_P GND GND **X**—**D** C2\_N **X**→**D** C3\_P **X**—**D** C3\_N

2.7 POWER UP SEQUENCE

Based on the system power configuration (1.8V or 2.8V for I/O power, using external DVDD or internal DVDD, requiring access to the I2C during power up period or not), the power up sequence will differ. If 1.8V is used for I/O power, using the internal DVDD is preferred. If 2.8V is used for I/O power, due to a high voltage drop at the internal DVDD regulator, there is a potential heat issue. Hence, for a 2.8V power system, OmniVision recommends using an external DVDD source. Due to the higher power down current when using an external DVDD source. OmniVision strongly recommends cutting off all powers, including the external DVDD, when the sensor is not in use in the case of 2.8V I/O and external DVDD.

2.7.1 POWER UP WITH INTERNAL DVDD

For powering up with the internal DVDD and I2C access during the power ON period, the following conditions must occur:

1. when DOVDD and AVDD are turned ON, make sure DOVDD becomes stable before AVDD becomes stable 2. PWDN is active high with an asynchronized design (does not need clock) 3. PWDN pin tied to digital ground if it is not controlled. 4. If PWDN pin is controlled as below, for PWDN to go low, power must first become stable

(AVDD to PWDN ≥ 5 ms)


5. RESETB is active low with an asynchronized design

6. master clock XVCLK should provide at least 1 ms before host accesses the sensor's registers

7. host can access I2C bus (if shared) during entire period. 20ms after RESETB goes high,

host can access the sensor's registers to initialize sensor






XVCLK can be turned on after power on

t<sub>2</sub> ≥ 1ms, delay from sensor power up stable to RESETB pull up

t<sub>4</sub> ≥ 20ms, delay from RESETB pull high to SCCB initialization

 $t_5 \ge 0$ ms, delay from AVDD off to DOVDD off

t<sub>6</sub> ≥ 0ms, delay from RESETB pull low to AVDD off



5640 DS 2 2

MIPI CSI Copyright 2018 GNU GPLv3

eric.kuzmenko@puri.sm angus.ainslie@puri.sm nicole.faerber@puri.sm christian.schilmoeller@puri.sm

OV5640 CMOS Image Sensor Datasheet: https://cdn.sparkfun.com/datasheets/ Sensors/LightImaging/OV5640\_datasheet.pdf

Camera PN: Truly CO8725-B5SA-E

7-bit Slave Address: 0x78 (1111 000x)


Sheet: /MIPI/CSI/

File: csi.sch


Size: A4 Date: 2018-06-14 KiCad E.D.A. kicad 4.0.7

Rev: v0.1.0 ld: 13/24


## **Buttons & LED**

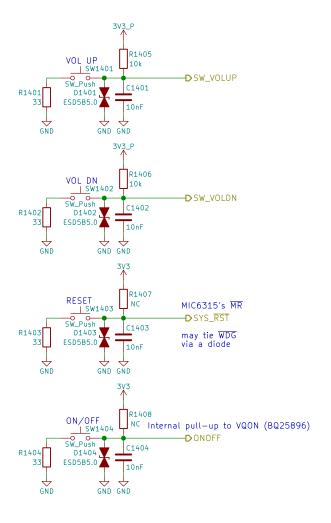



Use PWM2\_PWMSAR to set the compare value (duty cycle)
Use PWM2\_PWMCR[15:4] to set the PRESCALER (frequency)
Use PWM2\_PWMPR to set the top of the counter (frequency)






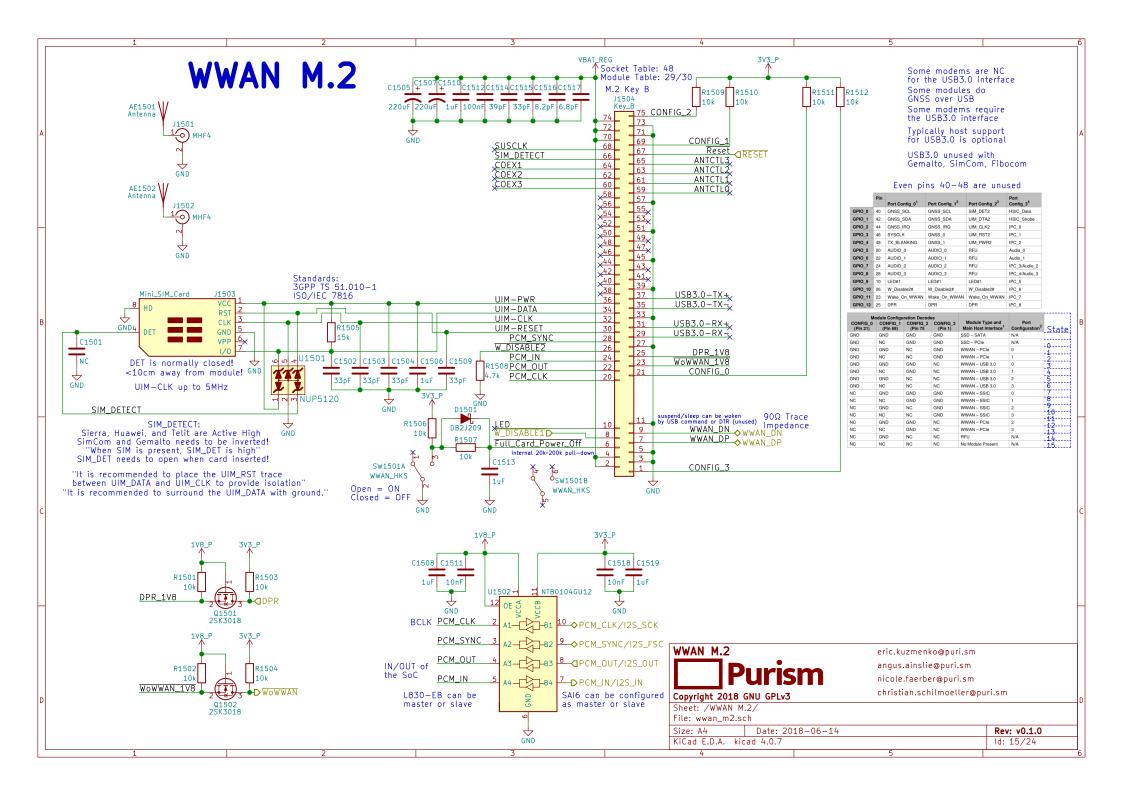

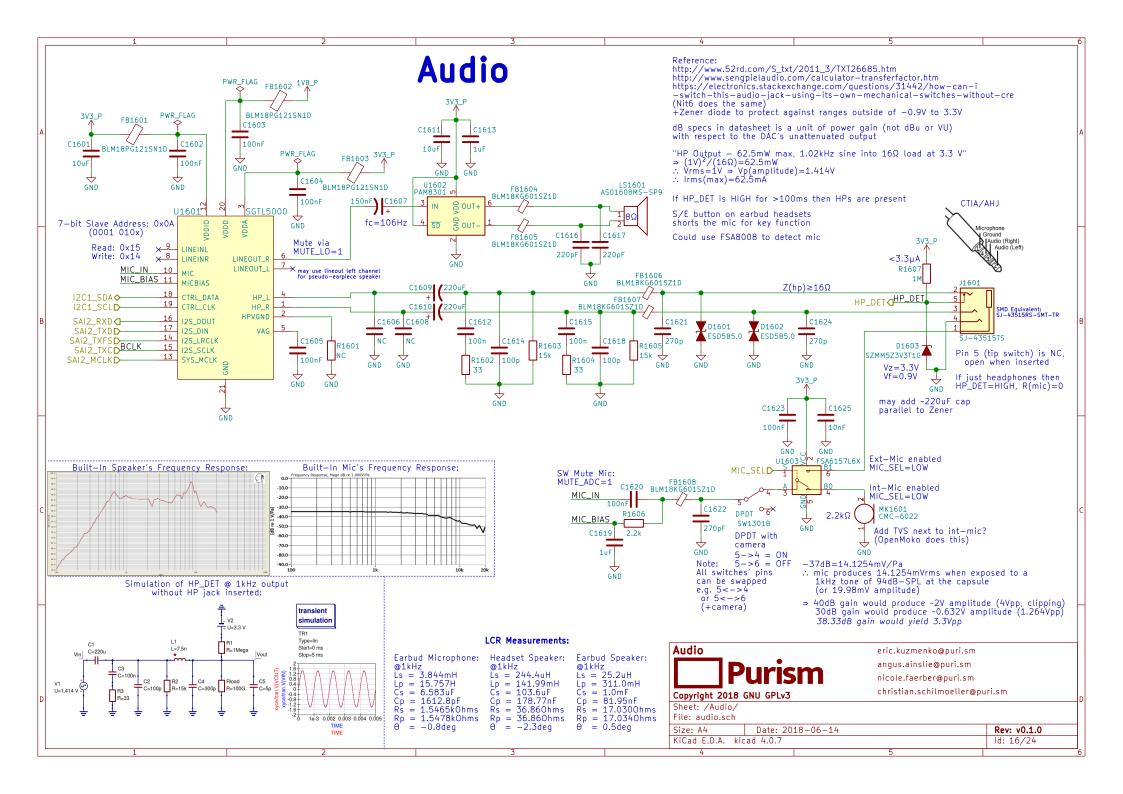


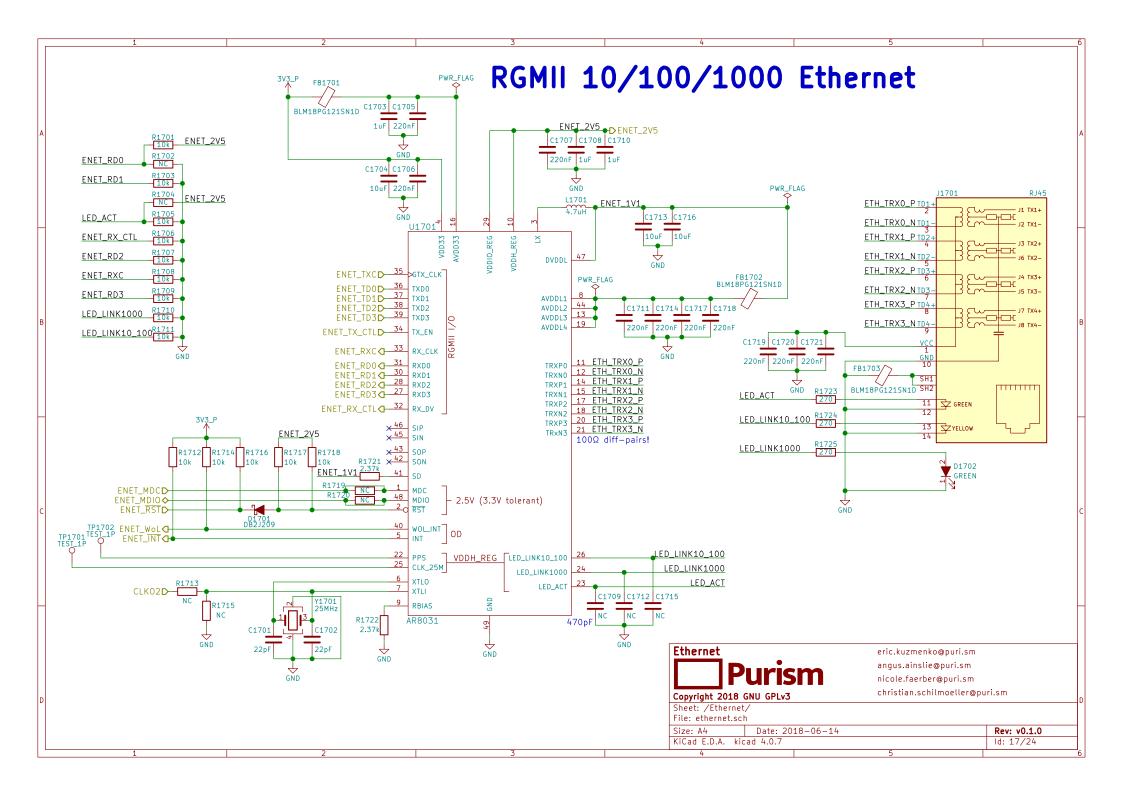

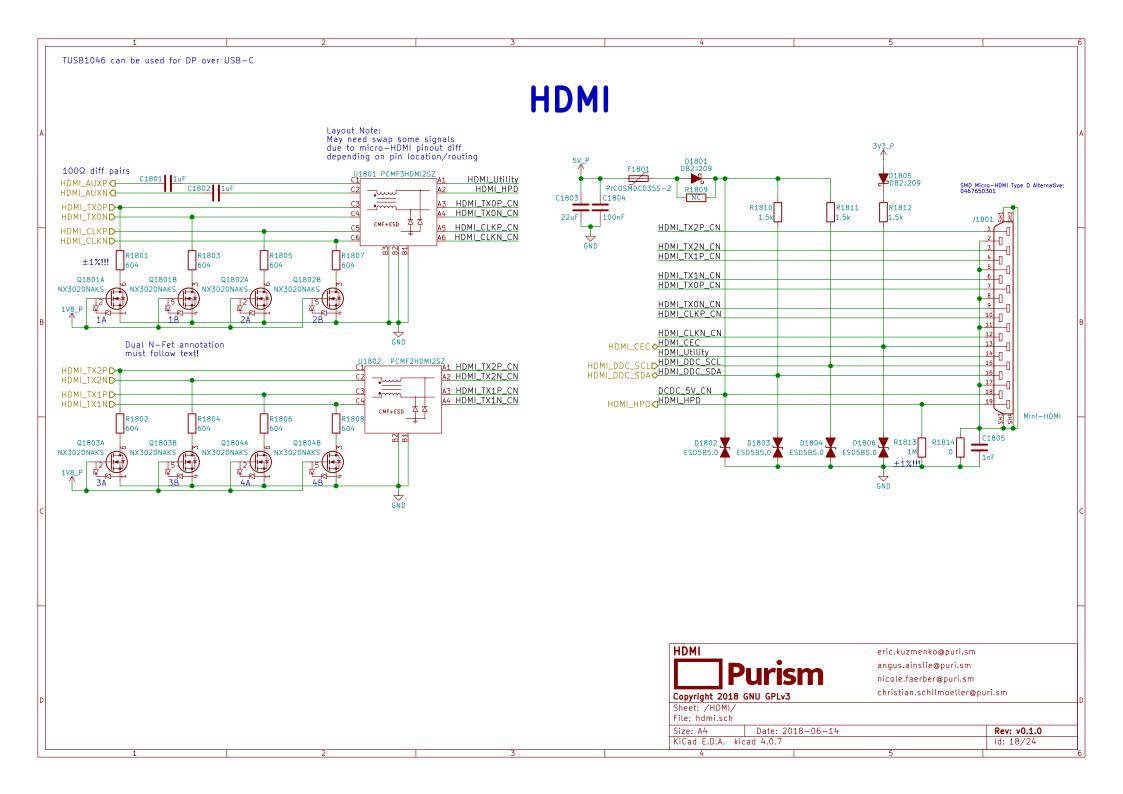


#### **Sensors**


#### Proximity & Ambient Light




Reference: https://www.vishay.com/docs/84307/designingvcnl4040.pdf http://www.vishay.com/docs/84931/vcnl4040sensorboardfiles.pdf

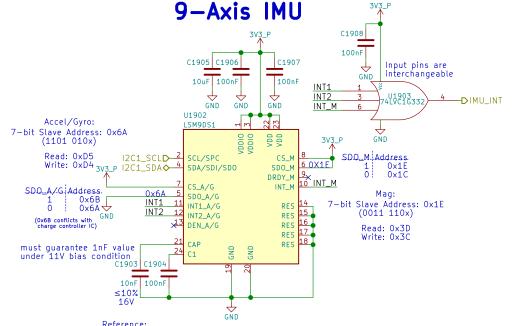


http://www.st.com/en/evaluation-tools/steval-mki159v1.html

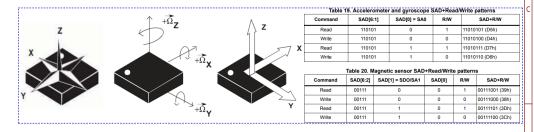




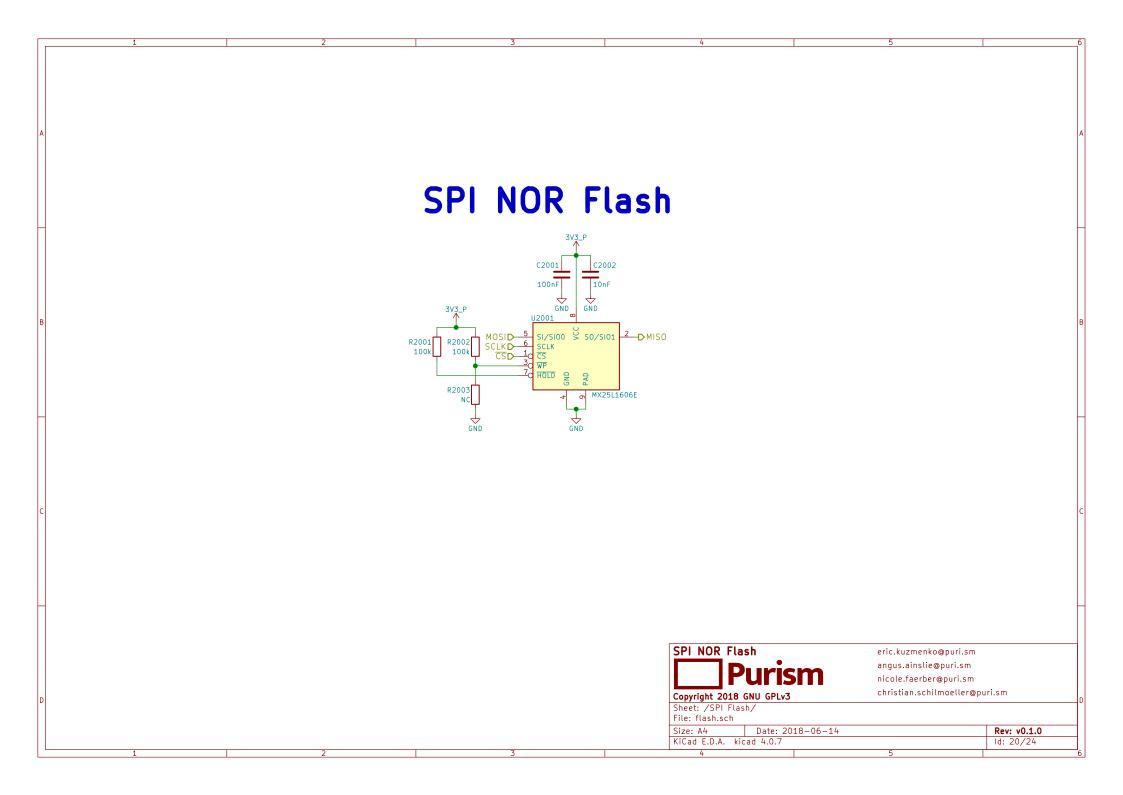


## **Smart Card**

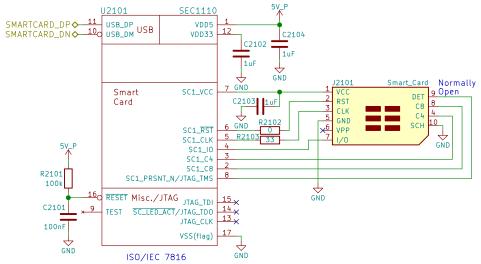


Reference: http://www.microchip.com/DevelopmentTools/ProductDetails.aspx?PartNO=EVB-SEC1110



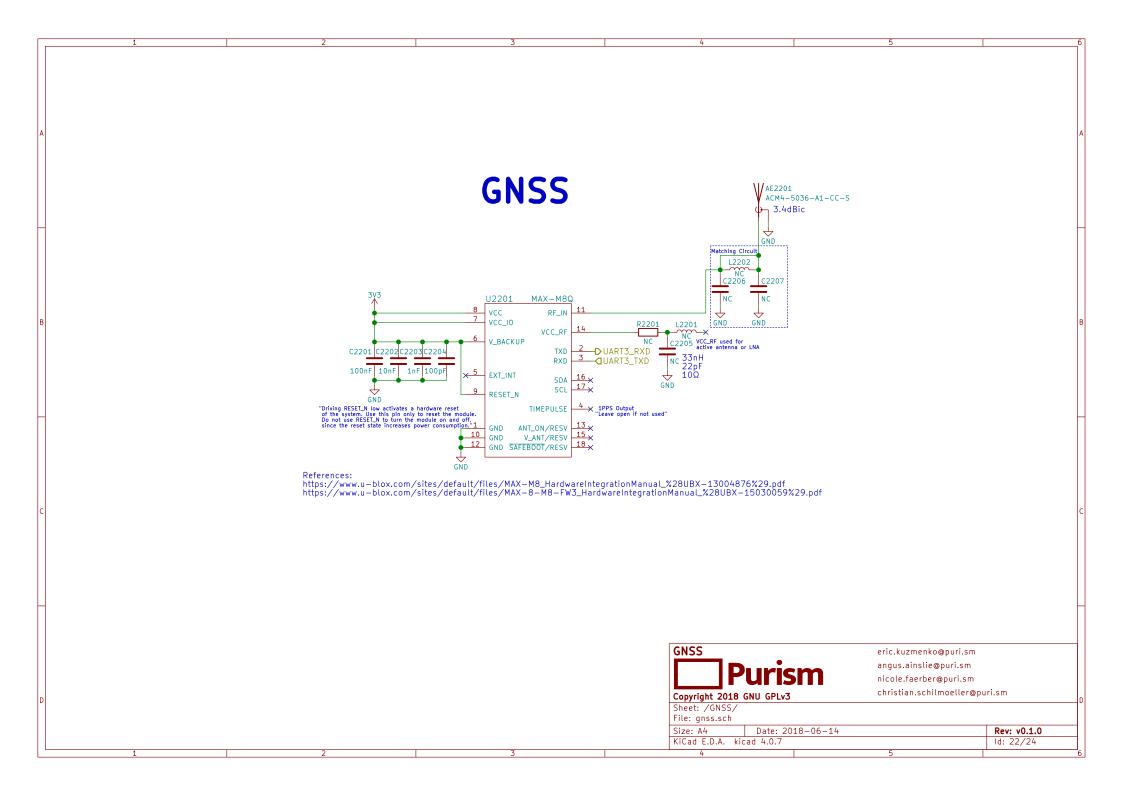

# **Haptic Motor**

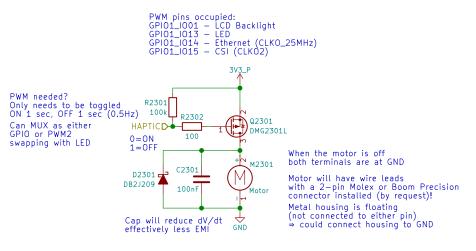

Cheaper Motor Connector: https://lcsc.com/product-detail/1-25T-Connectors\_1-25T-1-2AW\_C10832.html

Motor Source: https://www.alibaba.com/product-detail/Coin-motor-vibration-dc-motor cellphone\_1994583657.html?spm=a2700.8443308.0.0.5aa13e5f1wxHgs Motor Datasheet: https://cloud.puri.sm/s/z8JR6DJ4KrJYzoW Motor PN: BY0820Z021L20

Purism		eric.kuzmenko@puri.sm			
		angus.ainslie@puri.sm			
		nicole.faerber@puri.sm			
Copyright 2018 GNU GPLv3 christian.schilmoeller@pu			ri.sm		
Sheet: /Haptic Motor/					
File: haptic.sch					
Size: A4	Date: 2018-06-14		Rev: v0.1.0		
KiCad E.D.A. kid	ld: 23/24				

