




(interpret RSOC% based on this plot)

Drawing ~320mA, or consuming $\leq 1.152W$, should give close to 10 hours going from 100% to 0% charge

use AUTO_DPDM_EN to auto-detect IINLIM

$1.658 \leq ILIM \leq 2.063$
 $ILIM(nom) \approx 1.859A$
 $3.9 \leq VIN \leq 6$
 7-bit Slave Address: 0x6B (1101 011x)

Battery Charge Controller

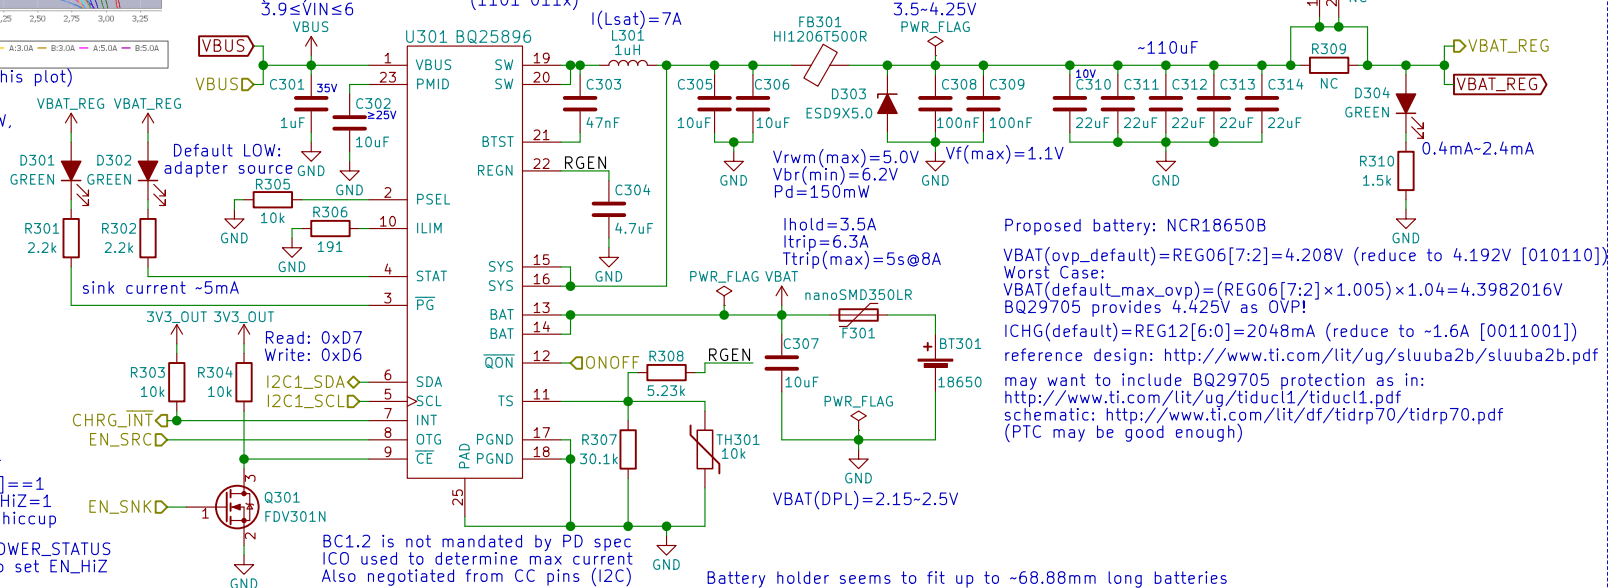

Reading PTN5110HQ's CC_STATUS and POWER_STATUS registers will tell TCPM (i.MX8M) when to set EN_HiZ

Also, reading PTN5110HQ's CC_STATUS and POWER_STATUS registers will tell TCPM (i.MX8M) when to set OTG_CONFIG=1 (this will also happen when PTN5110HQ sets EN_SRC HIGH)

Battery

Purism

Copyright 2018 GNU GPLv3


Sheet: /Battery/
 File: battery.sch

Size: A4 Date: 2018-08-14
 KiCad E.D.A. kicad 5.0.0


eric.kuzmenko@puri.sm
 angus.ainslie@puri.sm
 nicole.farber@puri.sm
 christian.schilmoeller@puri.sm

Rev: v0.1.0
 Id: 3/24


3.3V/3A

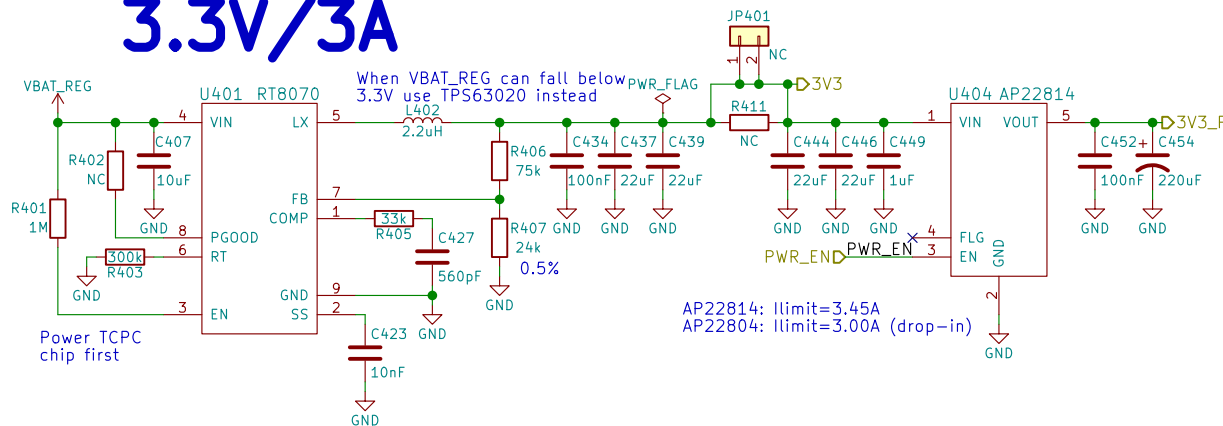


1.8V/600mA

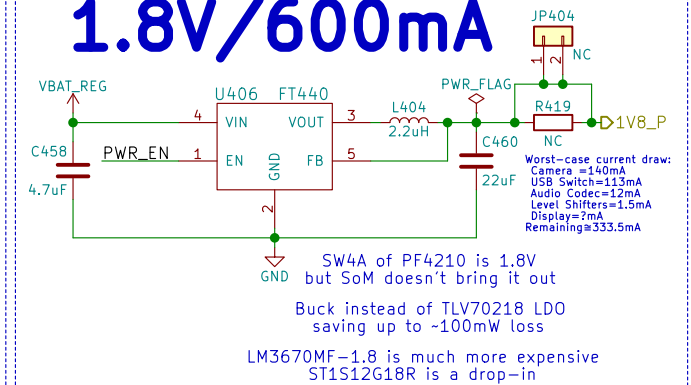


5.0V/3.8A

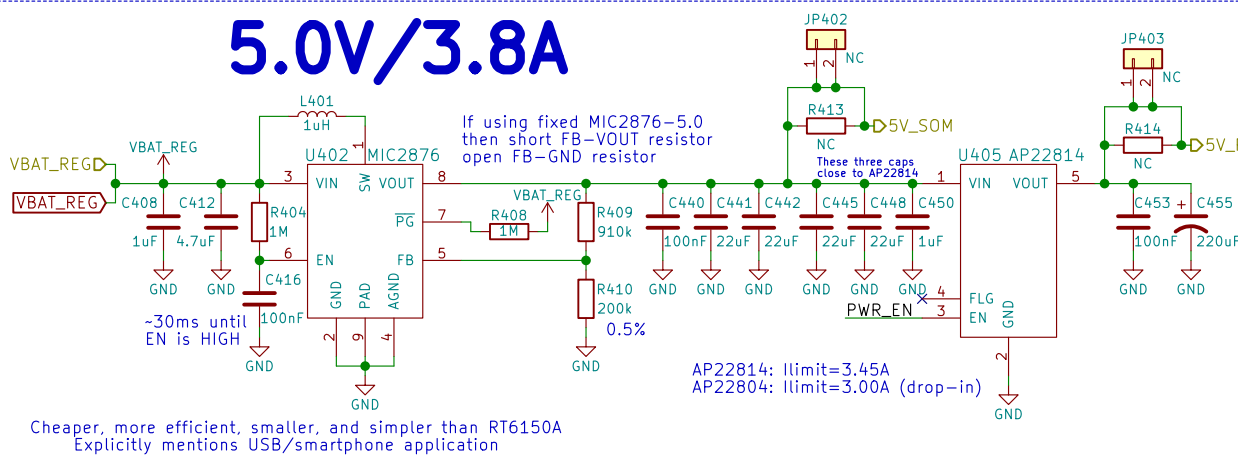


22.4V/40mA

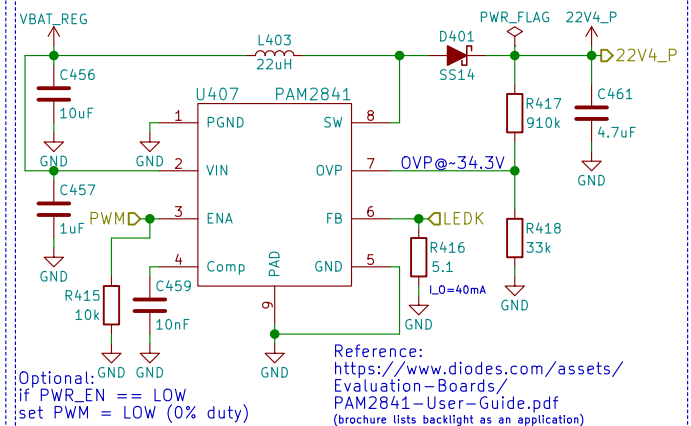

2.8V/150mA

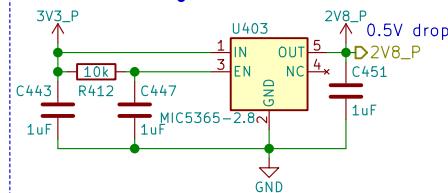

Power

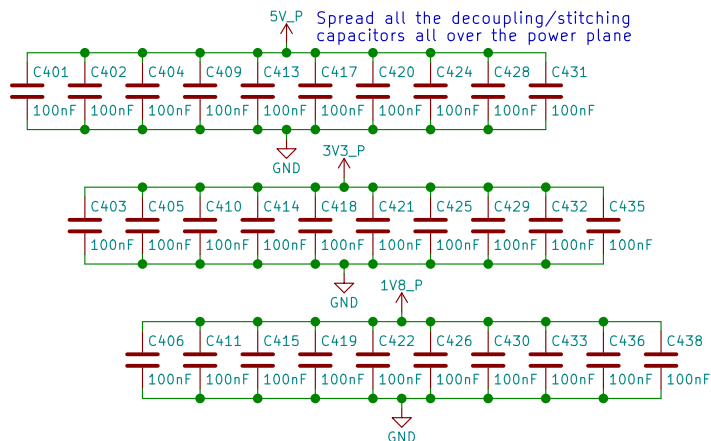

Power

Purism

Copyright 2018 GNU GPLv3

Sheet: /Power/
File: power.sch

Size: A4
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm

nicole.faeber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 4/24


Boot Config



2->1: eMMC 2->3: USB (Serial Downloader)	
BOOT_MODE[1:0]	Boot Type
00	Boot From Fuses
01	Serial Downloader
10	Internal Boot
11	Reserved

Only eMMC	
BOOT_CFG[14:12]	Boot device
001	SD/eSD
010	MMC/eMMC
011	NAND

Fuse	Config	Definition	GPIO ¹	Shipped value	Settings
BOOT_CFG[11:10]	OEM	USDHC port selection	Yes	00	00 - USDHC-1 01 - USDHC-2 10 - USDHC-3 else - reserved

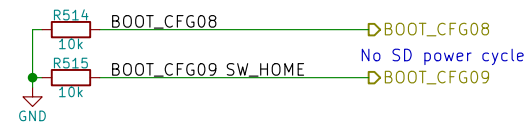

Boot Configuration



Copyright 2018 GNU GPLv3

Sheet: /Boot Config/
File: boot.sch

Size: A4
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm


angus.ainstlie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 5/24

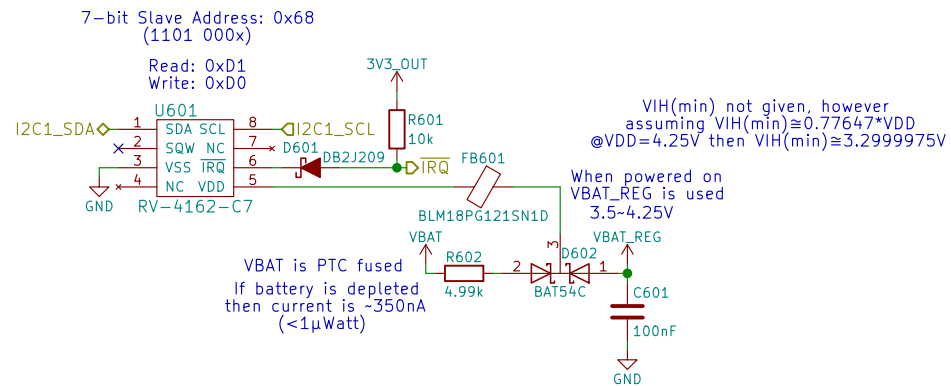

Note:
 DataSheet says slave address is 0xD0
 with a R/W bit appended, since 0xD0 must
 be 4-bits wide the actual 7-bit address is
 0x68 (110 1000), and becomes 0xD0 during a
 write operation (1101 0000)

Reference:
https://github.com/HIO-Project/linux-imx6-nano-imx_3.10.17_1.0.1_ga/blob/8848e94b2f889fe44f6736e2d4c98851a2282275/arch/arm/boot/dts/imx6qdl-mtp.dtsi#L351

RTC



Copyright 2018 GNU GPLv3

Sheet: /RTC/

File: rtc.sch

Size: A4	Date: 2018-08-14
----------	------------------

Size: A4	Date: 11/01/2025
KiCad E.D.A.	kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm


nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 6/24

UART Debug

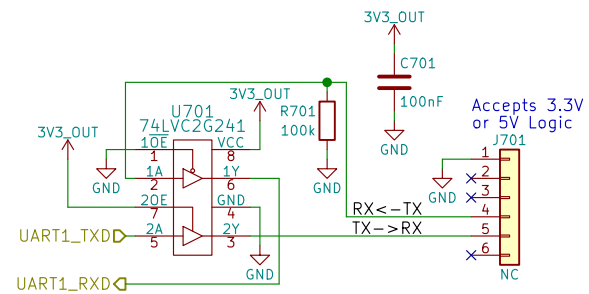

UART Debug



Copyright 2018 GNU GPLv3

Sheet: /UART Debug/

File: uart.sch

Size: A4

Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 7/24


eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

JTAG

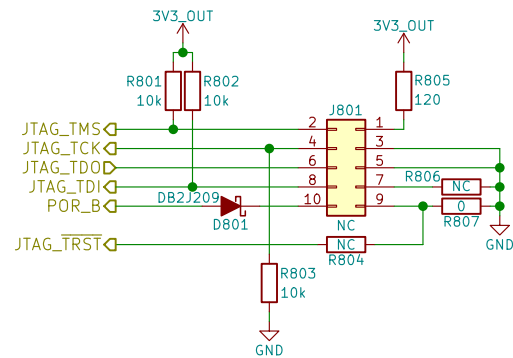

JTAG



Copyright 2018 GNU GPLv3

Sheet: /JTAG/

File: jtag.sch

Size: A4 Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm


nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 8/24

USB Hub + SDIO Bridge

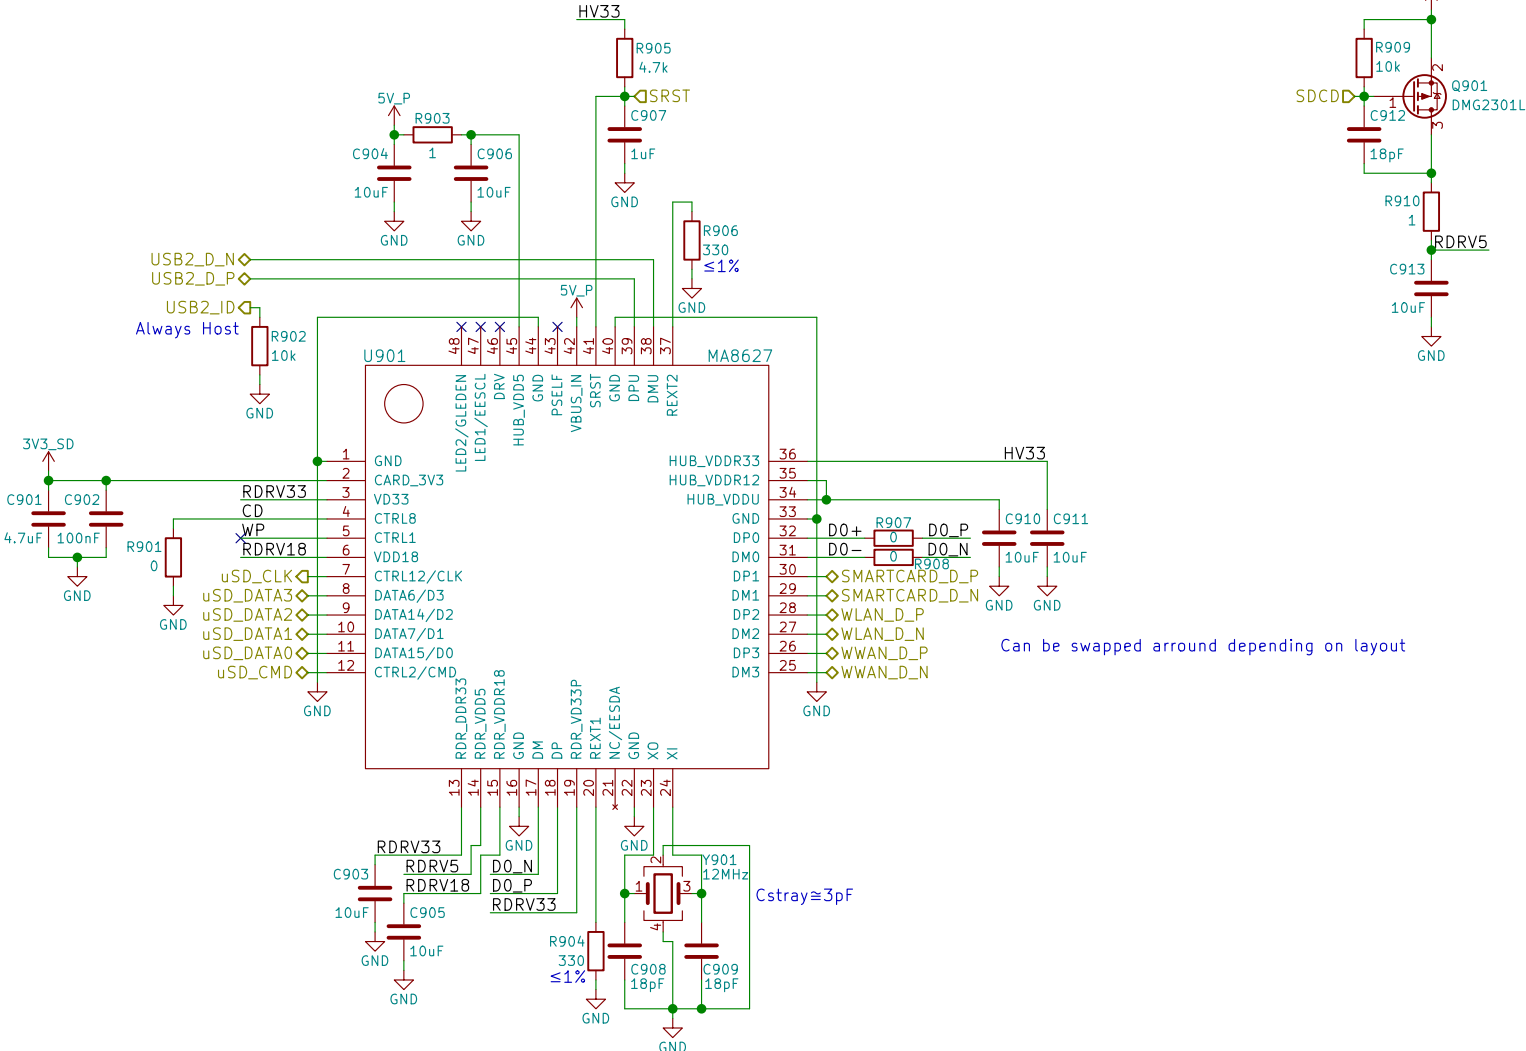

Can be swapped around depending on layout

USB Hub + SDIO Bridge



Copyright 2018 GNU GPLv3

Sheet: /USB Hub + SDIO Bridge/

Size: A4

Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm


nicole.faeber@puri.sm

christian.schilmoeller@puri.sm

Rev: v0.1.0

Id: 9/24

μSD

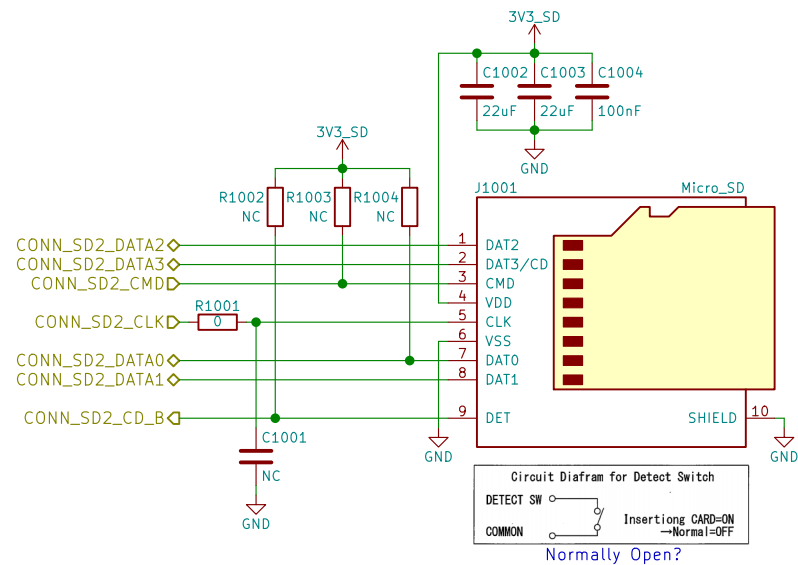

uSD Card



Purism

Copyright 2018 GNU GPLv3

Sheet: /uSD Card/

File: sd.sch

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm

nicole.ferber@puri.sm

christian.schilmoeller@puri.sm


Size: A4	Date: 2018-08-14
----------	------------------

Size: A1	Date: 2
KiCad E.D.A.	kicad 5.0.0

Rev: v0.1.0

Id: 10/24

MIPI

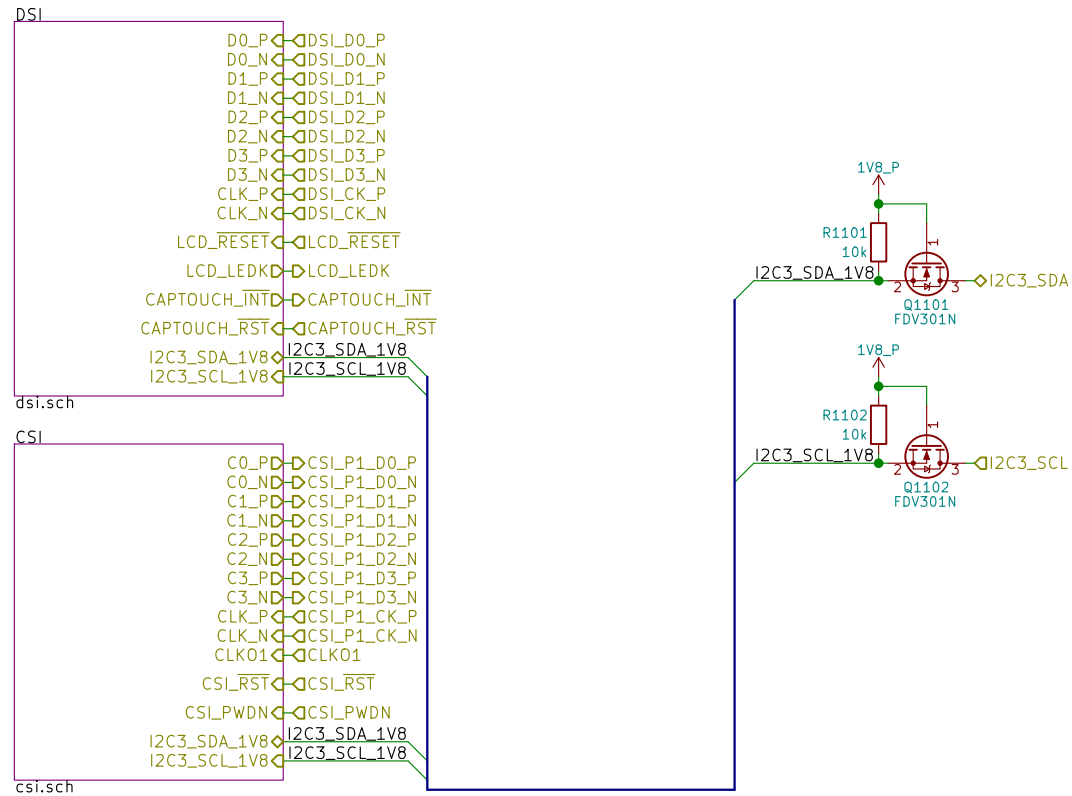

MIPI



Copyright 2018 GNU GPLv3

Sheet: /MIPI/
File: mipi.sch


Size: A4
KiCad E.D.A. kicad 5.0.0

Date: 2018-08-14



Rev: v0.1.0
Id: 11/24

eric.kuzmenko@puri.sm
angus.ainstlie@puri.sm
nicole.ferber@puri.sm
christian.schilmoeller@puri.sm

LCD PN:
Shenzhen Jinghong Electronics Co., Ltd.
JH057N00900

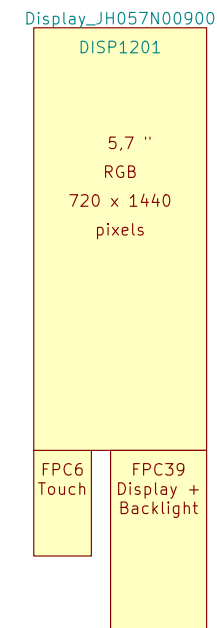

	7-Bit Address	8-Bit Write Address	8-Bit Read Address
LOW	0x5D	0xBA	0xBB
HIGH	0x14	0x28	0x29

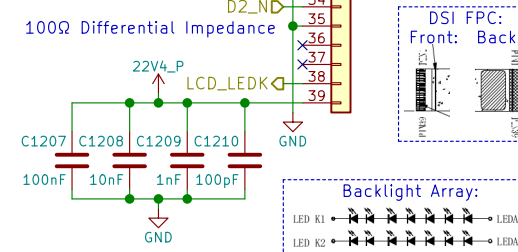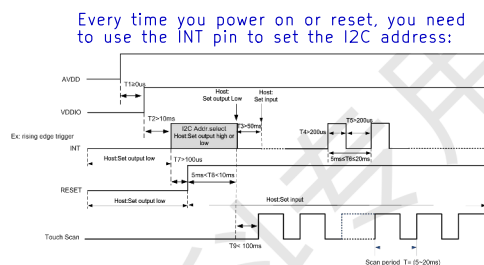

 **Purism**


eric.kuzmenko@puri.sm
angus.ainslie@puri.sm
nicole.ferber@puri.sm
christian.schilmoeller@puri.sm

Size: A4	Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0	


Rev: v0.1.0
Id: 12/24

Id: 13/24

Buttons & LED

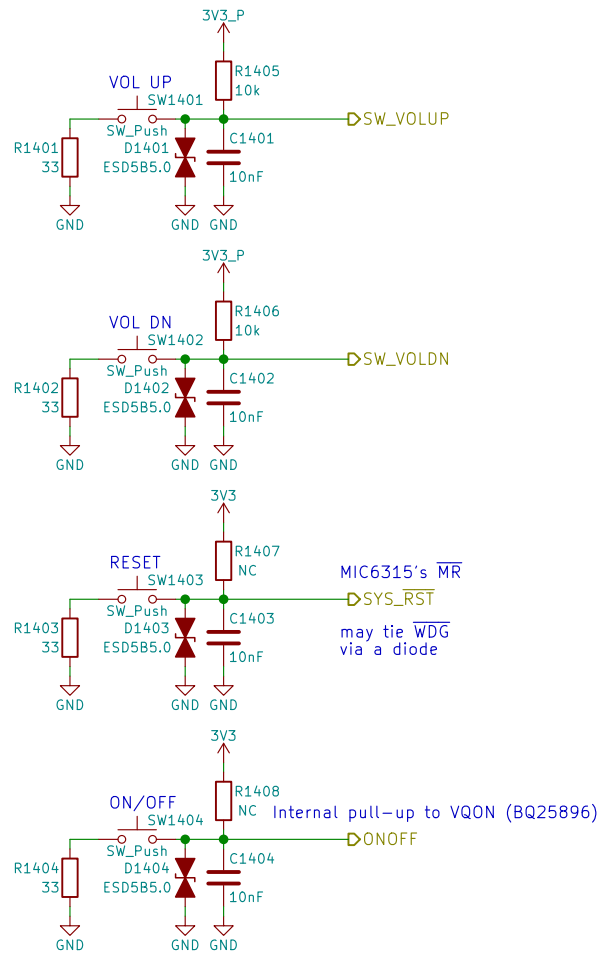

Use PWM2_PWMSAR to set the compare value (duty cycle)
Use PWM2_PWMCR[15:4] to set the PRESCALER (frequency)
Use PWM2_PWMPR to set the top of the counter (frequency)

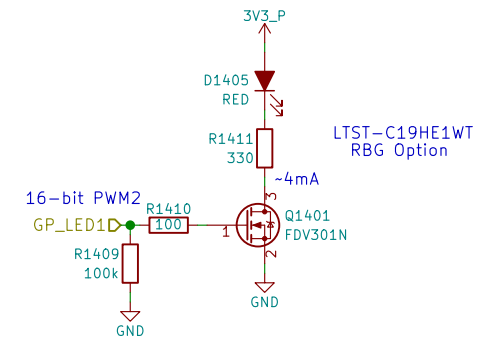

Buttons & LED



Copyright 2018 GNU GPLv3


Sheet: /Buttons & LED/
File: buttons_led.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0


eric.kuzmenko@puri.sm
angus.ainstie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 14/24

WWAN mPCIe

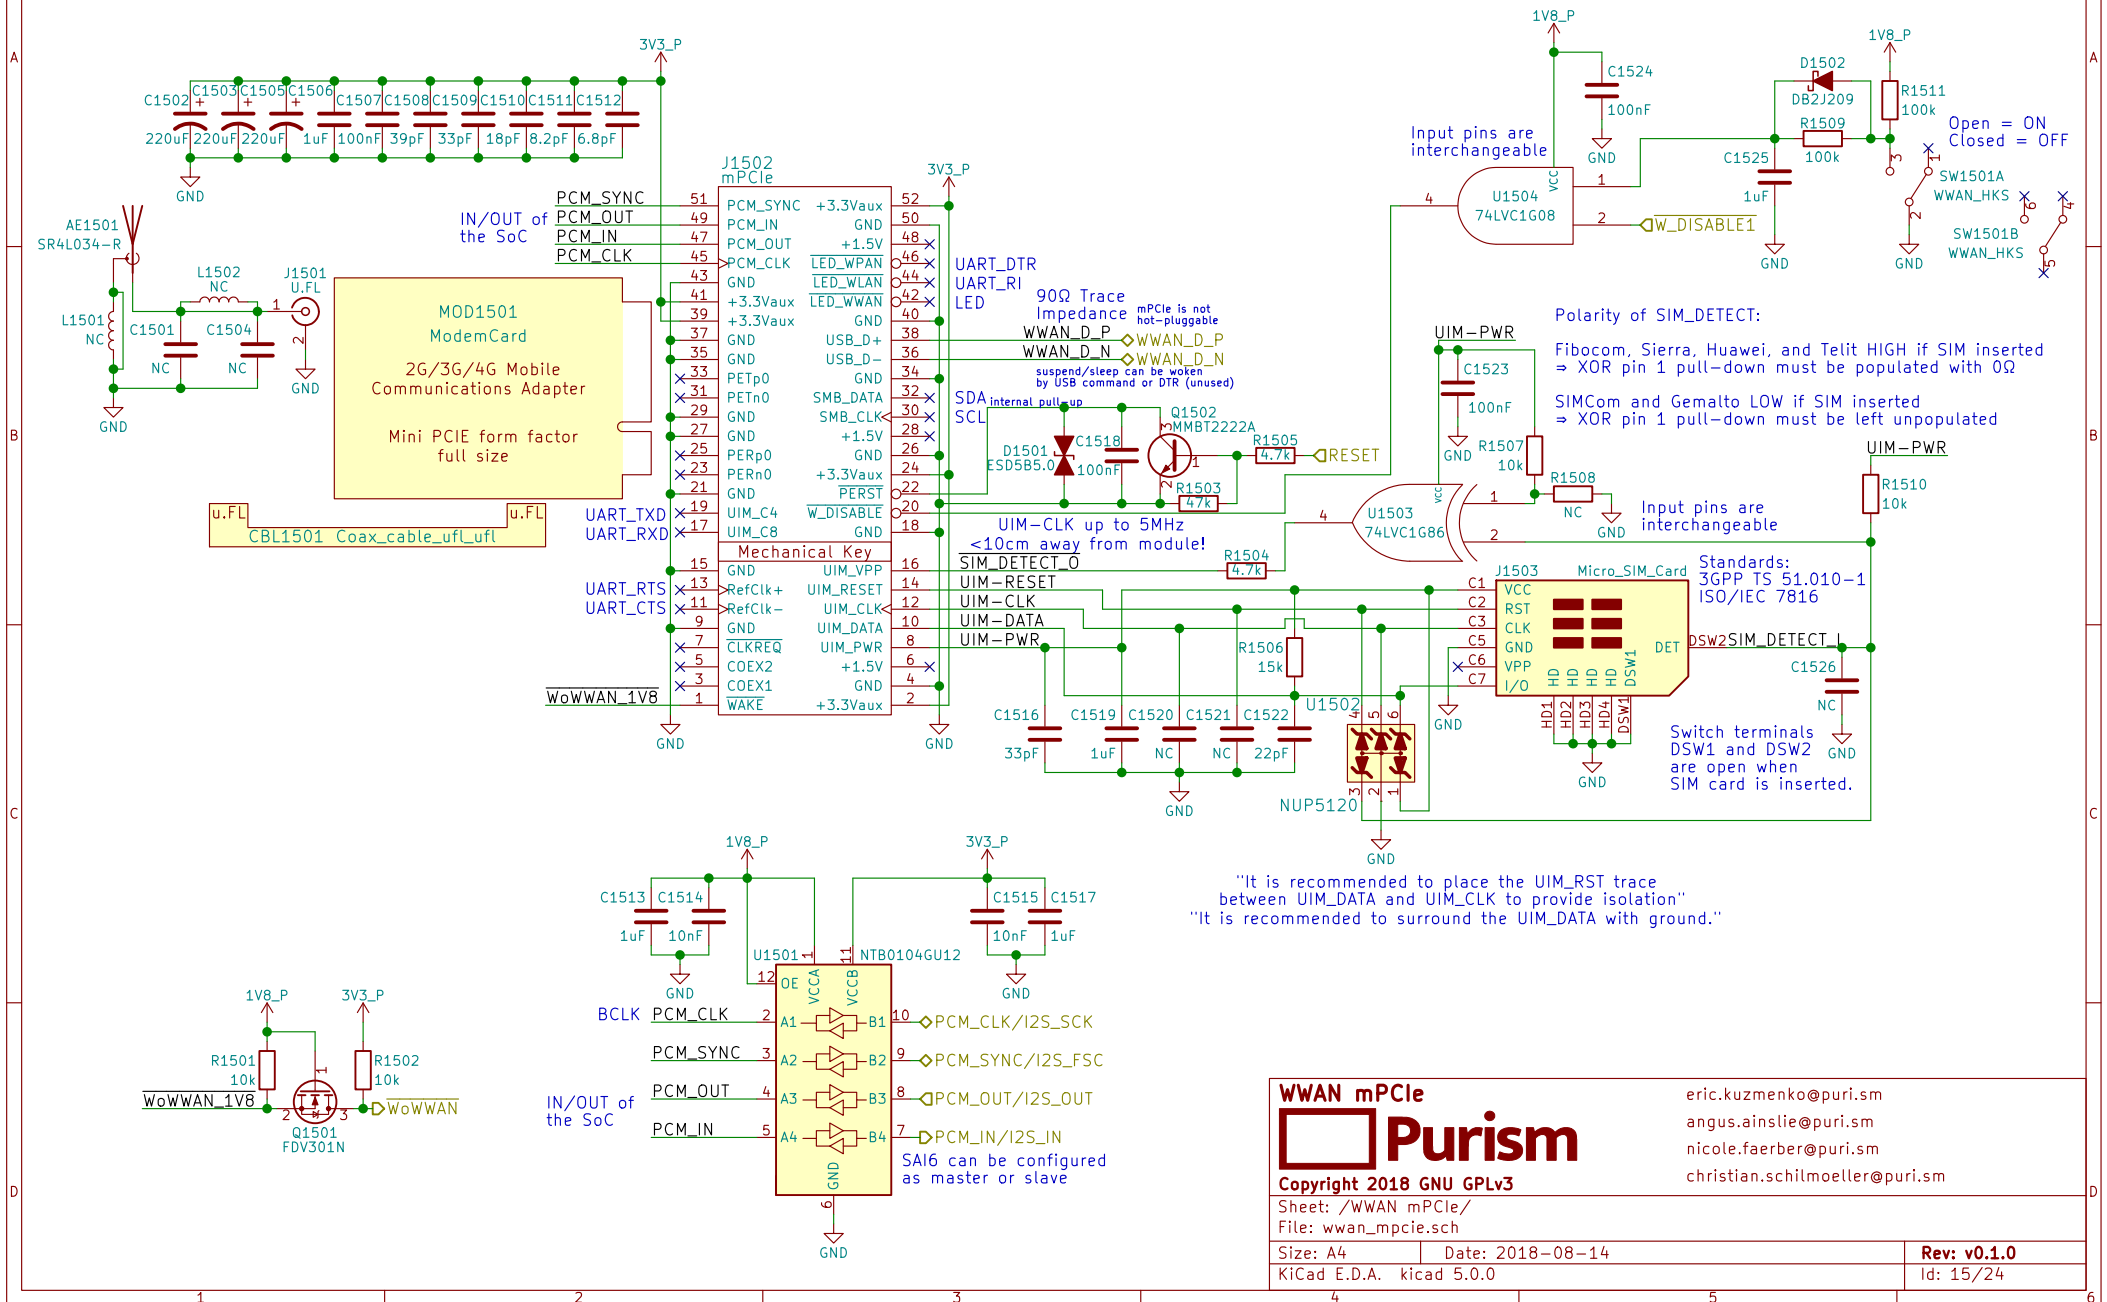

Audio

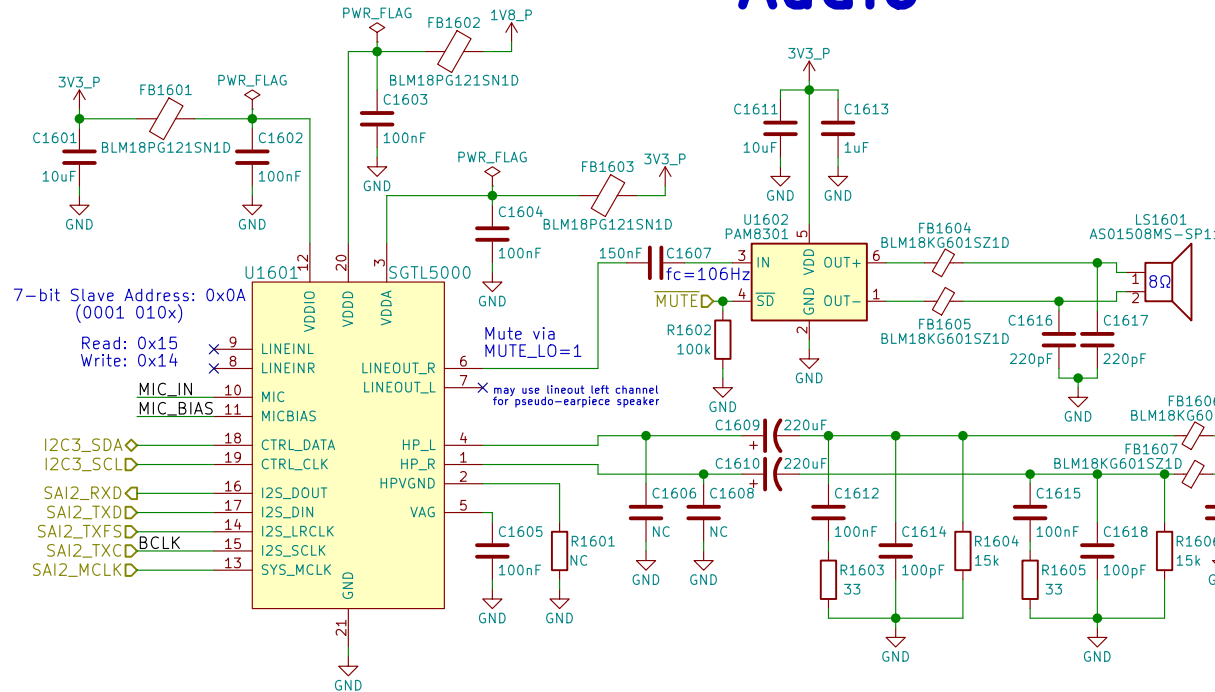

Reference:
http://www.52rd.com/S_txt/2011_3/TXT26685.htm
<http://www.sengpielaudio.com/calculator-transferfactor.htm>
<https://electronics.stackexchange.com/questions/31442/how-can-i-switch-this-audio-jack-using-its-own-mechanical-switches-without-circuitry>
 +Zener diode to protect against ranges outside of -0.9V to 3.3V




dB specs in datasheet is a unit of power gain (not dBu or VU) with respect to the DAC's unattenuated output

"HP Output - 62.5mW max, 1.02kHz sine into 16Ω load at 3.3 V"
 $\Rightarrow (1V)^2 / (16\Omega) = 62.5mW$
 $\therefore V_{rms} = 1V \Rightarrow V_p(\text{amplitude}) = 1.414V$
 $\therefore I_{rms}(\text{max}) = 62.5mA$

If HP_DET is HIGH for >100ms then HPs are present

S/E button on earbud headsets shorts the mic for key function

Could use FSA8008 to detect mic

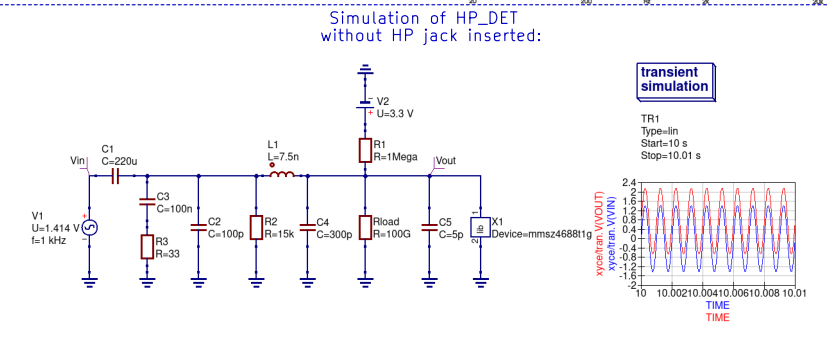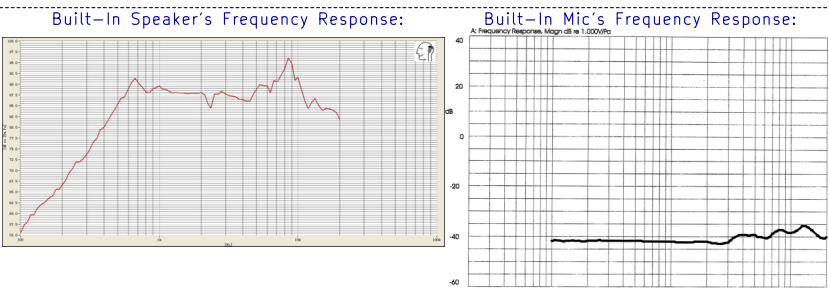

LCR Measurements:

Earbud Microphone: @1kHz Ls = 3.844mH Lp = 15.757H Cs = 6.583uF Cp = 1612.8pF Rs = 1.5465kOhms Rp = 1.5478kOhms θ = -0.8deg	Headset Speaker: @1kHz Ls = 244.4uH Lp = 141.99mH Cs = 103.6uF Cp = 178.77nF Rs = 36.86Ohms Rp = 36.86Ohms θ = -2.3deg	Earbud Speaker: @1kHz Ls = 25.2uH Lp = 311.0mH Cs = 1.0mF Cp = 81.95nF Rs = 17.030Ohms Rp = 17.034Ohms θ = 0.5deg
---	--	---

Audio



Copyright 2018 GNU GPLv3

Sheet: /Audio/
File: audio.sch


Size: A4
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
angus.ainstlie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

-37dB=14.1254mV/Pa
 \therefore mic produces 14.1254mVrms when exposed to a 1kHz tone of 94dB-SPL at the capsule (or 19.98mV amplitude)
 \Rightarrow 40dB gain would produce -2V amplitude (4Vpp, clipping)
 30dB gain would produce -0.632V amplitude (1.264Vpp)
 38.33dB gain would yield 3.3Vpp

Rev: v0.1.0
Id: 16/24

RGMII 10/100/1000 Ethernet

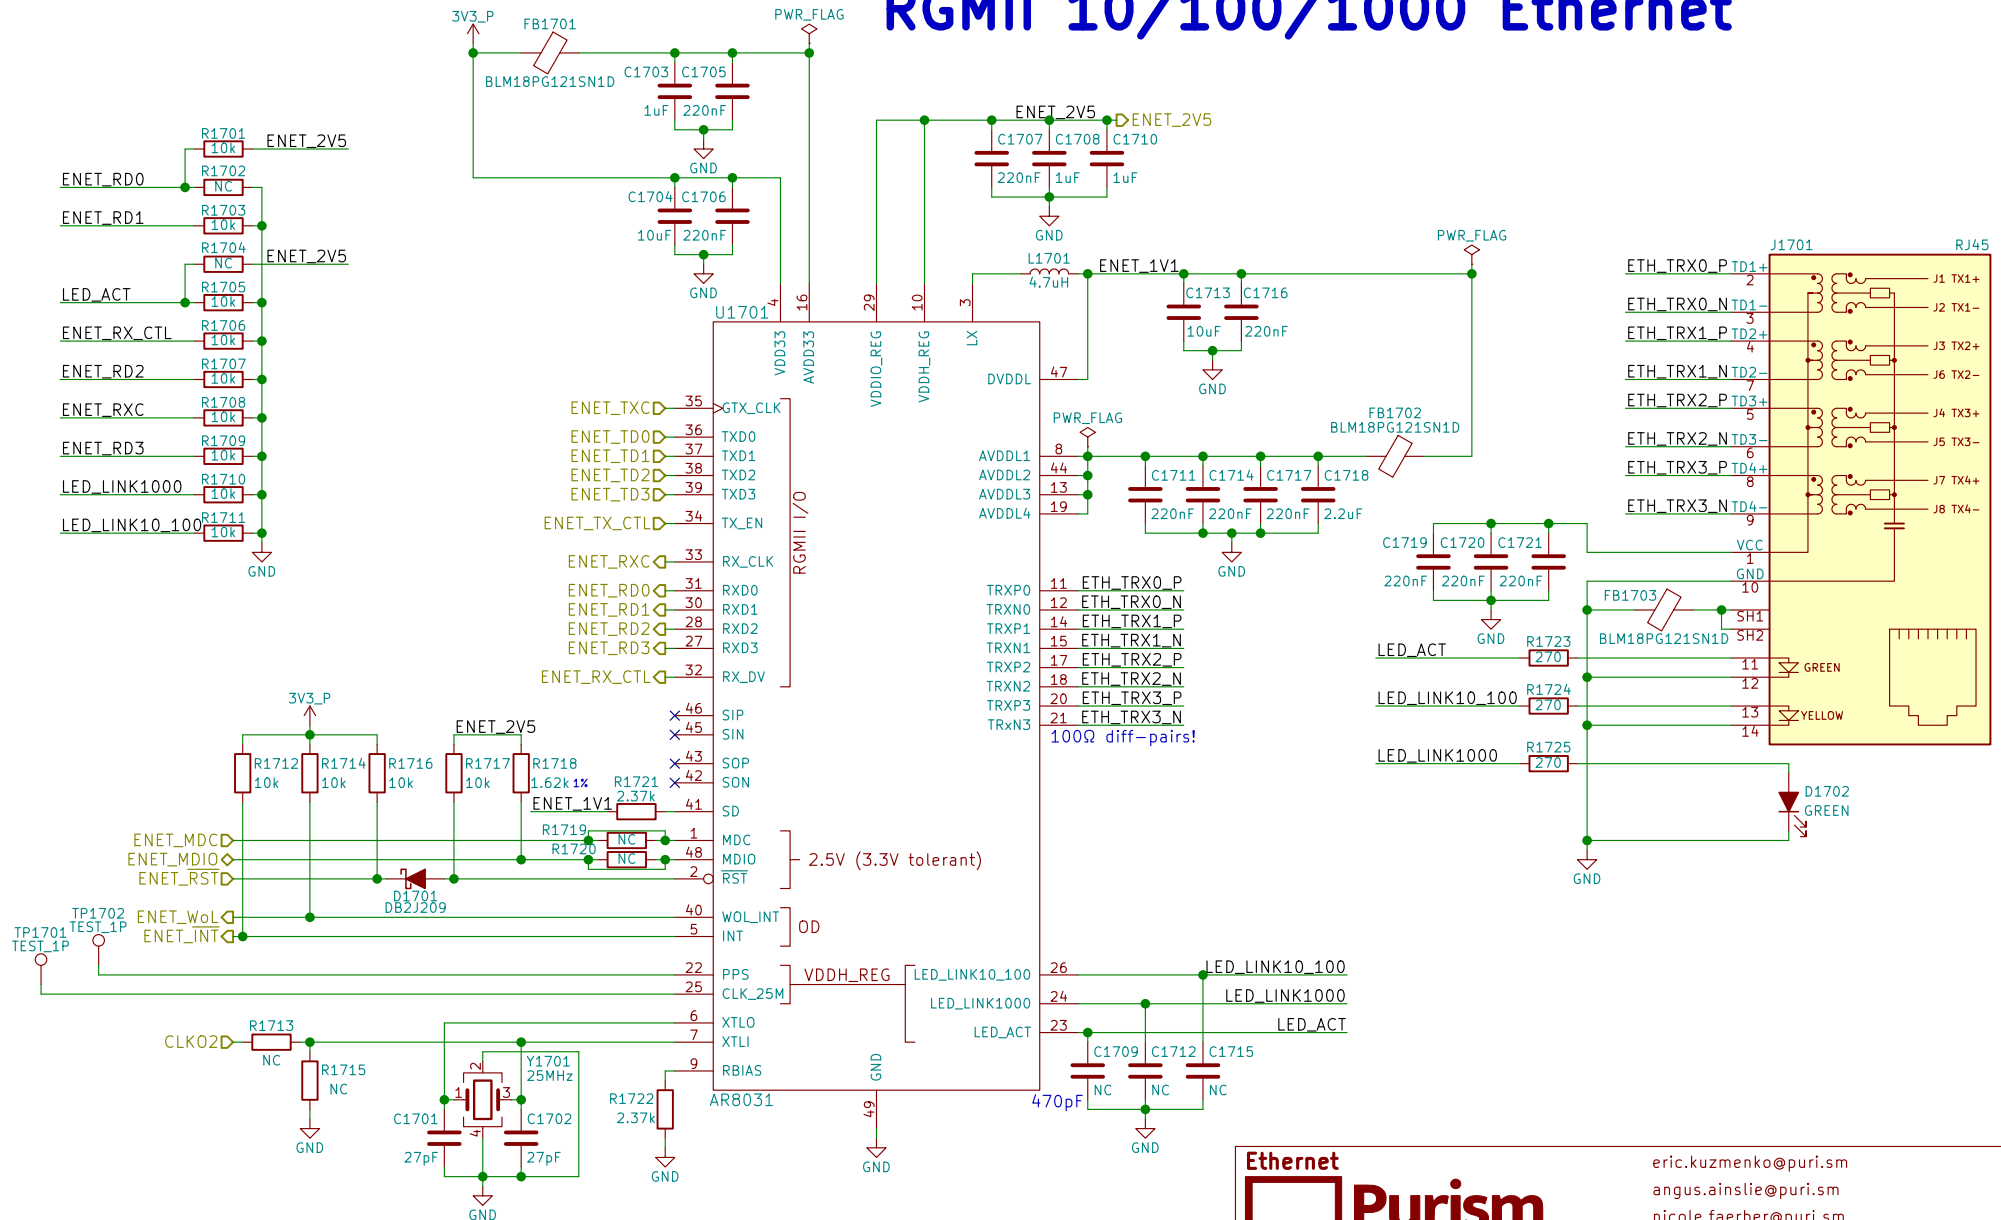

Ethernet

Purism

Copyright 2018 GNU GPLv3

Sheet: /Ethernet/
File: ethernet.sch

Size: A4 Date: 2018-08-14
KiCad E.D.A. kicad 5.0.0

eric.kuzmenko@puri.sm
angus.ainslie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 17/24

WLAN+BT M.2

RS9116 NC:
RTS, CTS, BT_HOST_WAKE

RS9116 datasheet says
no WIFI_WAKE
but the schematic has it

RedPine RS9116 MB0
Requires 5V on
Pin 54 if USB used

WLAN_D_P
WLAN_D_N
WIFI_CLK
WIFI_CMD
WIFI_DATA0
WIFI_DATA1
WIFI_DATA2
WIFI_DATA3
WIFI_WAKE

RedPine RS9116
has 100k pull-up to
3.3V making SDIO_RST
~2.55V when HIGH

MOD1801
WifiBTCard
WiFi + Bluetooth
M.2 Form Factor
Key ID "E"
width: 22 mm
length: 30 mm

Socket: Table 46
Module: Table 23

M.2 Key E

3V3_P

1802 NC

JP1801

1801 100k

DB2J209

1802

DB2J209

1V8_P

VIH=2.31V

WIFI_RST

W_DISABLE1

33

35

37

39

41

43

45

47

49

51

53

55

57

59

61

63

65

67

69

71

73

75

77

79

81

83

85

87

89

91

93

95

97

99

101

103

105

107

109

111

113

115

117

119

121

123

125

127

129

131

133

135

137

139

141

143

145

147

149

151

153

155

157

159

161

163

165

167

169

171

173

175

177

179

181

183

185

187

189

191

193

195

197

199

201

203

205

207

209

211

213

215

217

219

221

223

225

227

229

231

233

235

237

239

241

243

245

247

249

251

253

255

257

259

261

263

265

267

269

271

273

275

277

279

281

283

285

287

289

291

293

295

297

299

301

303

305

307

309

311

313

315

317

319

321

323

325

327

329

331

333

335

337

339

341

343

345

347

349

351

353

355

357

359

361

363

365

367

369

371

373

375

377

379

381

383

385

387

389

391

393

395

397

399

401

403

405

407

409

411

413

415

417

419

421

423

425

427

429

431

433

435

437

439

441

443

445

447

449

451

453

455

457

459

461

463

465

467

469

471

473

475

477

479

481

483

485

487

489

491

493

495

497

499

501

503

505

507

509

511

513

515

517

519

521

523

525

527

529

531

533

535

537

539

541

543

545

547

549

551

553

555

557

559

561

563

565

567

569



571

573

575

TUSB1046 can be used for DP over USB-C

HDMI

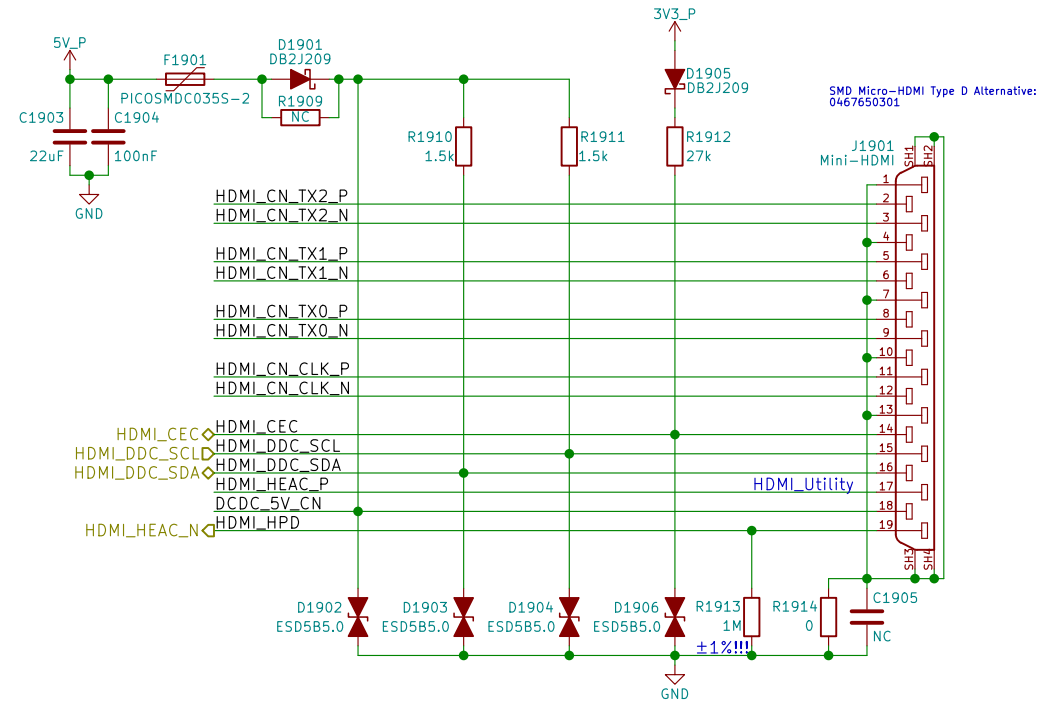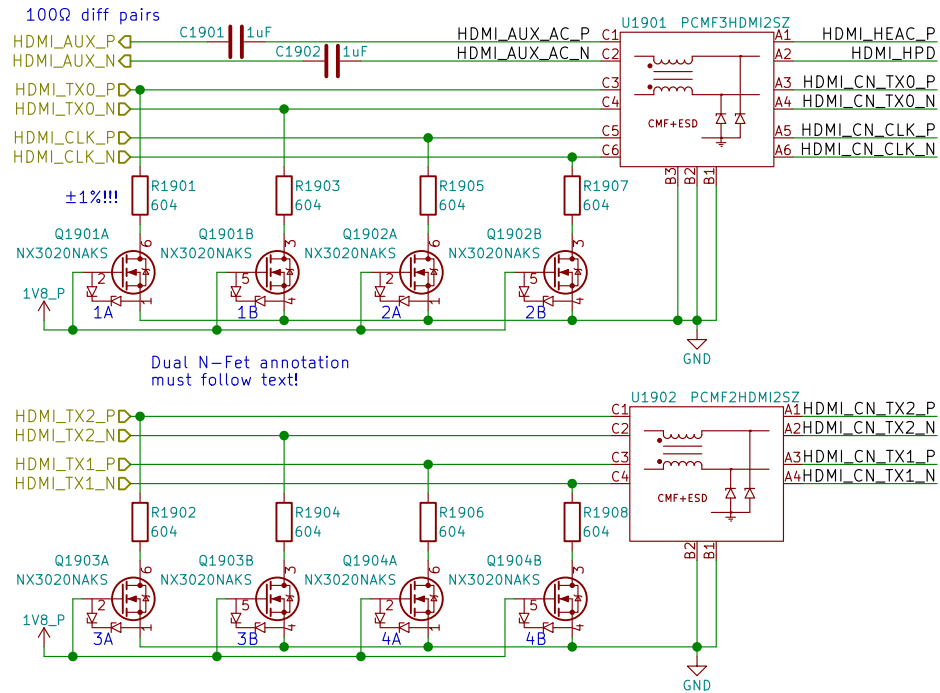

HDMI



Copyright 2018 GNU GPLv3

Sheet: /HDMI/
File: hdmi.sch

Size: A4
KiCad E.D.A. kicad 5.0.0

Date: 2018-08-14

eric.kuzmenko@puri.sm
angus.ainstie@puri.sm
nicole.farber@puri.sm
christian.schilmoeller@puri.sm

Rev: v0.1.0
Id: 19/24

1

B



C

D


1



1



Id: 20/24

SPI NOR Flash  Purism		eric.kuzmenko@puri.sm angus.ainslie@puri.sm nicole.faeber@puri.sm christian.schilmoeller@puri.sm
Copyright 2018 GNU GPLv3		
Sheet: /SPI Flash/ File: flash.sch		
Size: A4	Date: 2018-08-14	Rev: v0.1.0
KiCad E.D.A. kicad 5.0.0		Id: 21/24

[illegible]

Smart Card



christian.schilmoeller@puri.sm

Id: 22/24

GNSS



References:

https://www.u-blox.com/sites/default/files/MAX-M8_HardwareIntegrationManual_L%28UBX-13004876%29.pdf

https://www.u-blox.com/sites/default/files/MAX-8-M8-FW3_HardwareIntegrationManual_L%28UBX-15030059%29.pdf

GNSS



Copyright 2018 GNU GPLv3

Sheet: /GNSS/

File: gnss.sch

Size: A4 Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 23/24

eric.kuzmenko@puri.sm

angus.ainstlie@puri.sm


nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Haptic Motor

PWM pins occupied:
 GPIO1_I001 - LCD Backlight
 GPIO1_I013 - LED
 GPIO1_I014 - Ethernet (CLKO_25MHz)
 GPIO1_I015 - CSI (CLKO2)

PWM needed?
 Only needs to be toggled
 ON 1 sec, OFF 1 sec (0.5Hz)
 Can MUX as either
 GPIO or PWM2
 swapping with LED

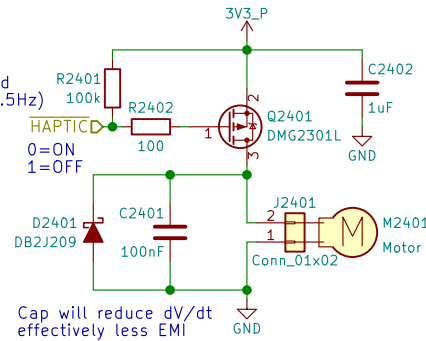

When the motor is off
 both terminals are at GND
 Motor will have wire leads
 with a 2-pin Molex or Boom Precision
 connector installed (by request)
 Metal housing is floating
 thick adhesive layer underneath
 (not connected to either pin)

Haptic/Vibration Motor



Copyright 2018 GNU GPLv3

Sheet: /Haptic Motor/
 File: haptic.sch

eric.kuzmenko@puri.sm

angus.ainslie@puri.sm

nicole.farber@puri.sm

christian.schilmoeller@puri.sm

Size: A4 Date: 2018-08-14

KiCad E.D.A. kicad 5.0.0

Rev: v0.1.0

Id: 24/24