


2 AT Interface Synopsis

2.1 Interface settings

Between Customer Application and the Module, standardized RS-232 interface is used for the communication, and default values for the interface settings as following:

115200bps, 8 bit data, no parity, 1 bit stop, no data stream control.

Find AT Command to set TX Power
Not TXPWR Parameter (read-only)!
Module does not have DPR

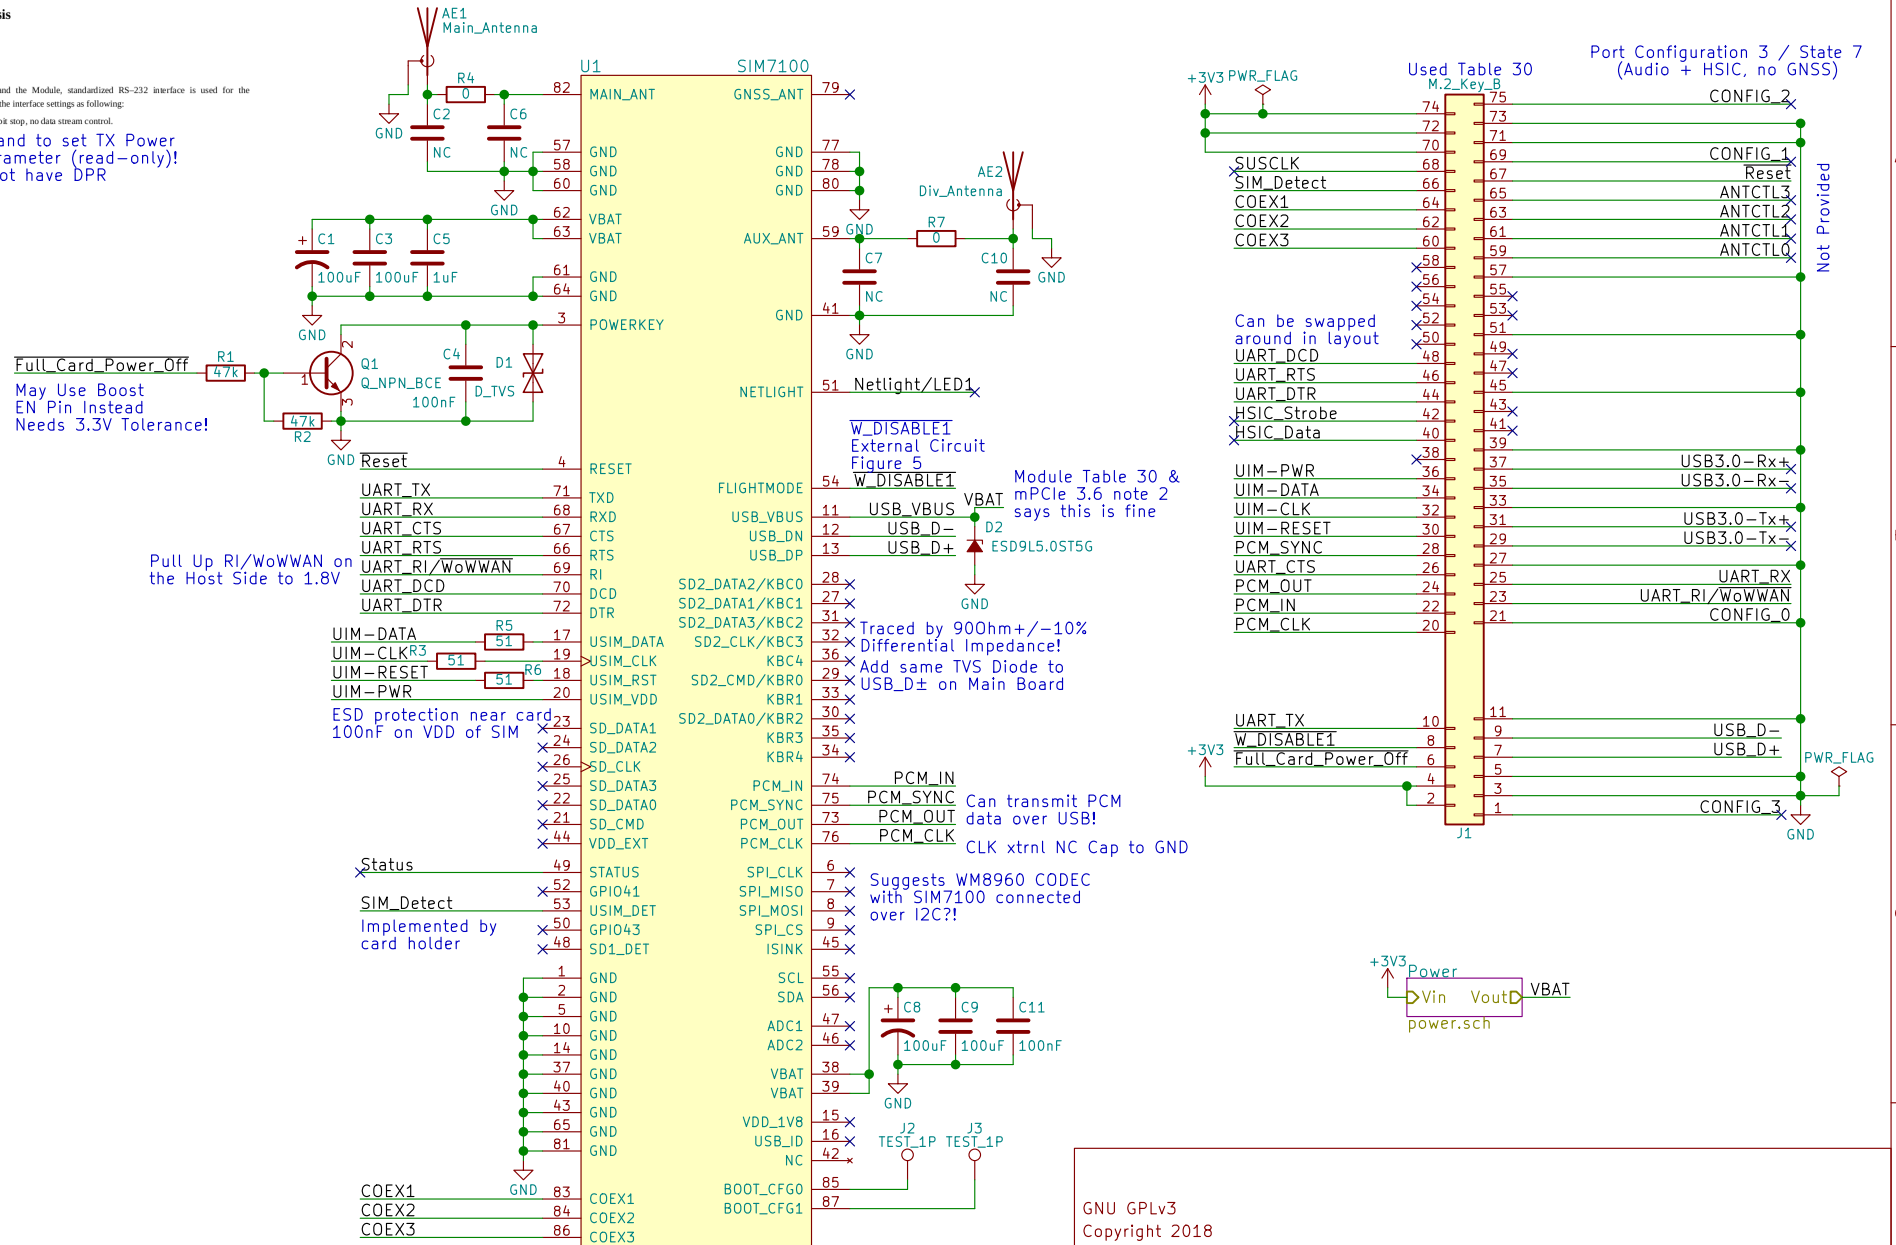

GNU GPLv3
Copyright 2018
Purism SPC

Sheet: /
File: m2_simcom_7100.sch

Title: M.2 SIMCom 7100

Size: A4 Date: 2018-03-20
KiCad E.D.A. kicad 4.0.7

Rev: 0.5.0
Id: 1/2

	1	2	3	4	5	6
A						
B						
C						
D						
	1	2	3	4	5	6

Sheet: /Power/ File: power.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 4.0.7		Id: 2/2