


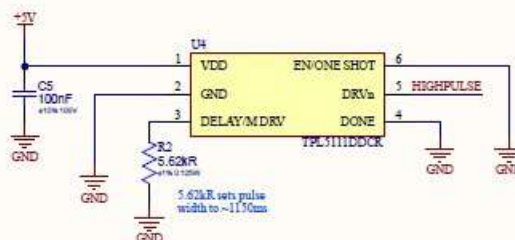
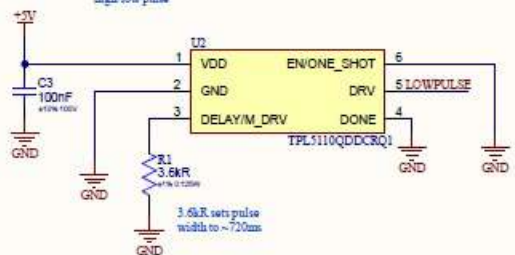


Upon receiving power, U2 and U4 both measure a resistance at pin 3 for ~100ms before emitting a high/low pulse

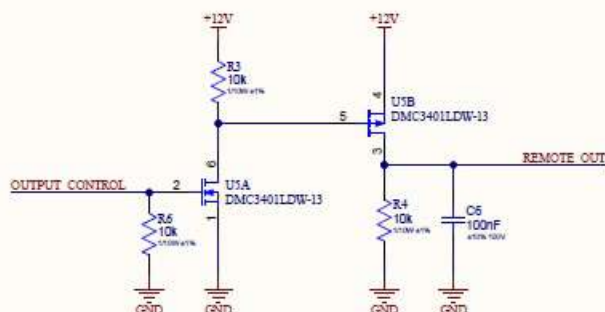

Upon receiving power, ENABLE signal waits 200ms at low, then transitions to high

By writing, ENABLE prevents unwanted outputs due to possible discrepancies between U2 and U4's measurement times

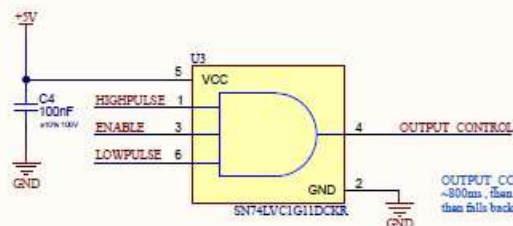

Dual MOSFET IC chip controls +12V output to amplifier board with identical polarity to OUTPUT_CONTROL

