LIQUID CRYSTAL DISPLAY MODULE

MODEL: MTG-F24160BFWHSEB-18A
Customer's No.:

Acceptance

Microtips Technology Inc.
12F. No.31 Lane 169, Kang Ning St., His-Chih,
Taipei Hsien, Taiwan, R.O.C.
FAX: 886-2-26958625

Approved and Checked by

Approved by	Checked by		Made by
微 端 2005/10/28 陳宏誠	微 端 2005/10/28 石國良	微 端 2005/10/28 連俊傑	微 端 2005/10/28 馬中平

Microtips Technology Inc.

Revise Records

Rev.	Date	Contents	Written	Approved
A	2005/10/28	Initial Release	David Ma	Garry Chen

Special Notes

Note1.	With touch panel attached.
Note2.	
Note3.	
Note4.	
Note5.	

Microtips Technology Inc.

Contents

Microtips Technology Inc.

1. General Specifications

Operating Temperature : Min. -10°C ∼ Max. 60°C

Storage Temperature : Min. -20°C ∼ Max. 60°C

Dot Pixels : 240 (W) x 160 (H) dots

Dot Size : 0.23 (W) x 0.23 (H) mm

Dot Pitch : 0.24 (W) x 0.24 (H) mm

Viewing Area : 61.6 (W) x 42.5 (H) mm

Outline Dimensions : 74.69* (W) x 54.1 (H) x 4.0 max. (D) mm

* Not concerning EL pin and FPCB

Weight : N/A

LCD Type : FSTN/ Positive mode/ Transflective

Viewing Direction : 6:00

Data Transfer : 4-bit parallel data transfer

Backlight : EL backlight (Blue-Geen)

Drawings : As attached drawings

Microtips Technology Inc.

2. Electrical Specifications

2.1 Absolute Maximum Ratings

$V_{SS} = 0V$

Parameter	Symbol	Conditions	Min.	Max.	Units
Supply Voltage (Logic)	$V_{DD} - V_{SS}$	--	-0.3	7.0	V
Supply Voltage (LCD Drive)	$V_0 - V_{SS}$	--	-0.3	30.0	V
Input Voltage	V_I	--	- 0.3	$V_{DD} + 0.3$	V

2.2 DC Characteristics

$Ta = 25°C, V_{SS} = 0V$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units	Note
Supply Voltage (Logic)	$V_{DD} - V_{SS}$	--	2.5	--	5.5	V	
Supply Voltage	$V_0 - V_{SS}$	--	15.0	--	30.0	V	
(LCD Drive)	$V_O - V_{SS}$	Shown in 3.1				V	
High Level Input Voltage	V_{IH}	--	$0.8V_{DD}$	--	--	V	
Low Level Input Voltage	V_{IL}	--	--	--	$0.2V_{DD}$	V	
High Level Output Voltage	V_{OH}	$I_{OH} = -0.4mA$	$V_{DD}-0.4$	--	--	V	
Low Level Output Voltage	V_{OH}	$I_{OH} = +0.4mA$	--	--	0.4	V	
Standby Current	I_{STB}	--	--	--	50	µA	1
Supply Current (1) Non-selection	I_{DD1}	--	--	--	2.0	mA	2
Supply Current (2) Selection	I_{DD2}	--	--	--	8.0	mA	3
Supply Current (3)	I_0				1.0	mA	4
Frame	f_F	Duty = 50%	65	70	75	Hz	

NOTES:
1. $V_{DD} = +5.0$ V, V0 = +30.0 V, $V_I = V_{SS}$.
2. $V_{DD} = +5.0$ V, V0 = +30.0 V, $f_{XCK} = 8$ MHz, no-load, El = V_{DD}. The input data is turned over by data taking clock (4-bit parallel input mode).
3. $V_{DD} = +5.0$ V, V0 = +30.0 V, $f_{XCK} = 8$ MHz, no-load, El = V_{SS}. The input data is turned over by data taking clock (4-bit parallel input mode).
4. $V_{DD} = +5.0$ V, V0 = +30.0 V, $f_{XCK} = 8MHz$, $f_{LP} = 19.2$ kHz, $f_{FR} = 80$ Hz, no-load. The input data is turned over by data taking clock (4-bit parallel input mode).

2.3 Signal Timing Diagram

Microtips Technology Inc.

Segment Mode (V$_{SS}$=0V, V$_{DD}$= 4.5~5.5V, V0=15 to 30 V, and Ta=-20 to +85°C)

Parameter	Symbol	Min.	Max.	Units	Condition
Shift clock period*	t$_{WLP}$	71	--	ns	tr, tf <=10ns
Shift clock "H" pulse width	t$_{WCKH}$	23	--	ns	
Shift clock "L" pulse width	t$_{WCKL}$	23	--	ns	
Data setup time	t$_{DS}$	10	--	ns	
Data hold time	t$_{DH}$	20	--	ns	
Latch pulse "H" pulse width	t$_{WLPH}$	23	--	ns	
Latch pulse rise to shift clock rise time	t$_{LS}$	51	--	ns	
Latch pulse fall to shift clock fall time	t$_{LH}$	51	--	ns	
Input signal rise time**	tr	--	50	ns	
Input signal fall time**	tf	--	50	ns	

Note :

 *Take the cascade connection into consideration.

**(t$_{WLP}$ -t$_{WCKH}$ -t$_{WCKL}$)/2 is the maximum in the case of high speed operation.

Segment Mode (V$_{SS}$=0V, V$_{DD}$= 2.5~4.5V, V0=15 to 30 V, and Ta=-20 to +85°C)

Parameter	Symbol	Min.	Max.	Units	Condition
Shift clock period*	t$_{WLP}$	125	--	ns	tr, tf <=11ns
Shift clock "H" pulse width	t$_{WCKH}$	51	--	ns	
Shift clock "L" pulse width	t$_{WCKL}$	51	--	ns	
Data setup time	t$_{DS}$	30	--	ns	
Data hold time	t$_{DH}$	40	--	ns	
Latch pulse "H" pulse width	t$_{WLPH}$	51	--	ns	
Latch pulse rise to shift clock rise time	t$_{LS}$	51	--	ns	
Latch pulse fall to shift clock fall time	t$_{LH}$	51	--	ns	
Input signal rise time**	tr	--	50	ns	
Input signal fall time**	tf	--	50	ns	

Note :

 *Take the cascade connection into consideration.

**(t$_{WLP}$ -t$_{WCKH}$ -t$_{WCKL}$)/2 is the maximum in the case of high speed operation.

Common Mode (V$_{SS}$=0V, V$_{DD}$= 2.5~5.5V, V0=15 to 30 V, and Ta=-20 to +85°C)

Parameter	Symbol	Min.	Max.	Units	Condition
Shift clock period	t$_{WLP}$	250	--	ns	tr, tf <=20ns

Microtips Technology Inc.

Shift clock "H" pulse width	t_{WCKH}	15	--	ns	$V_{DD} = 5.0V \pm 10\%$
		30	--	ns	$V_{DD} = 2.5 \sim 4.5V$
Data setup time	t_{DS}	30	--	ns	
Data hold time	t_{DH}	50	--	ns	
Input signal rise time**	tr	--	50	ns	
Input signal fall time**	tf	--	50	ns	
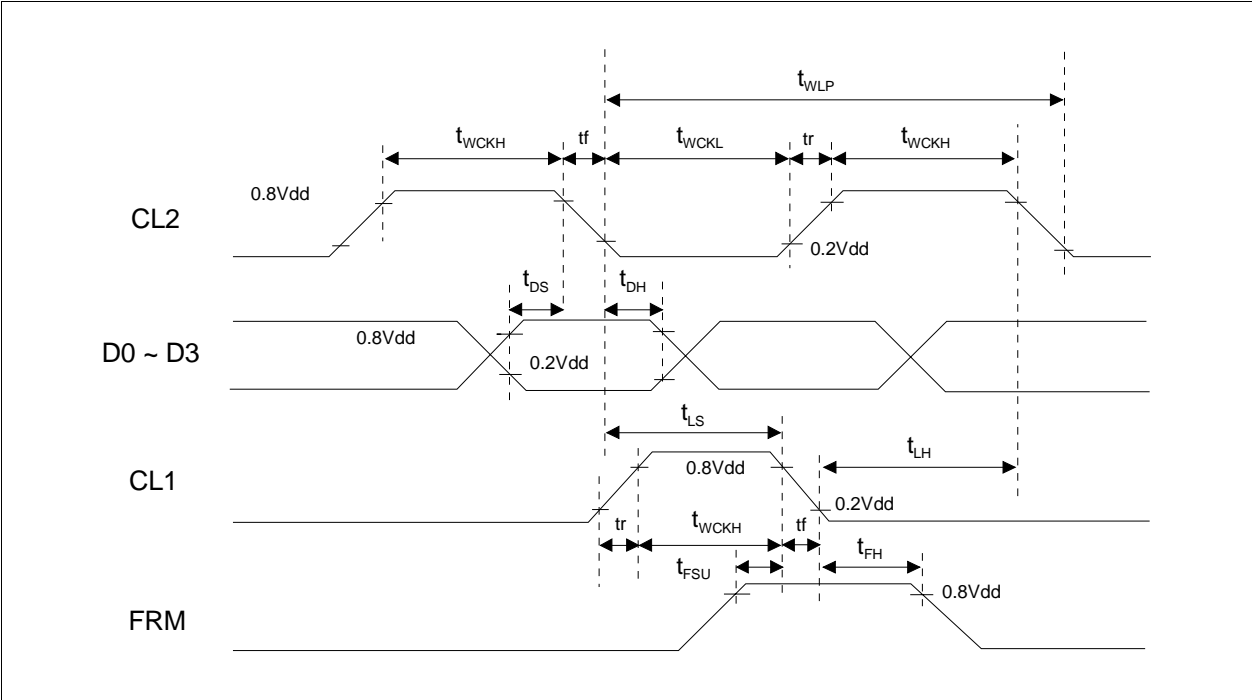
Signal Timing(1)

2.4 Timing Chart & Comparison of Display and Data

Microtips Technology Inc.
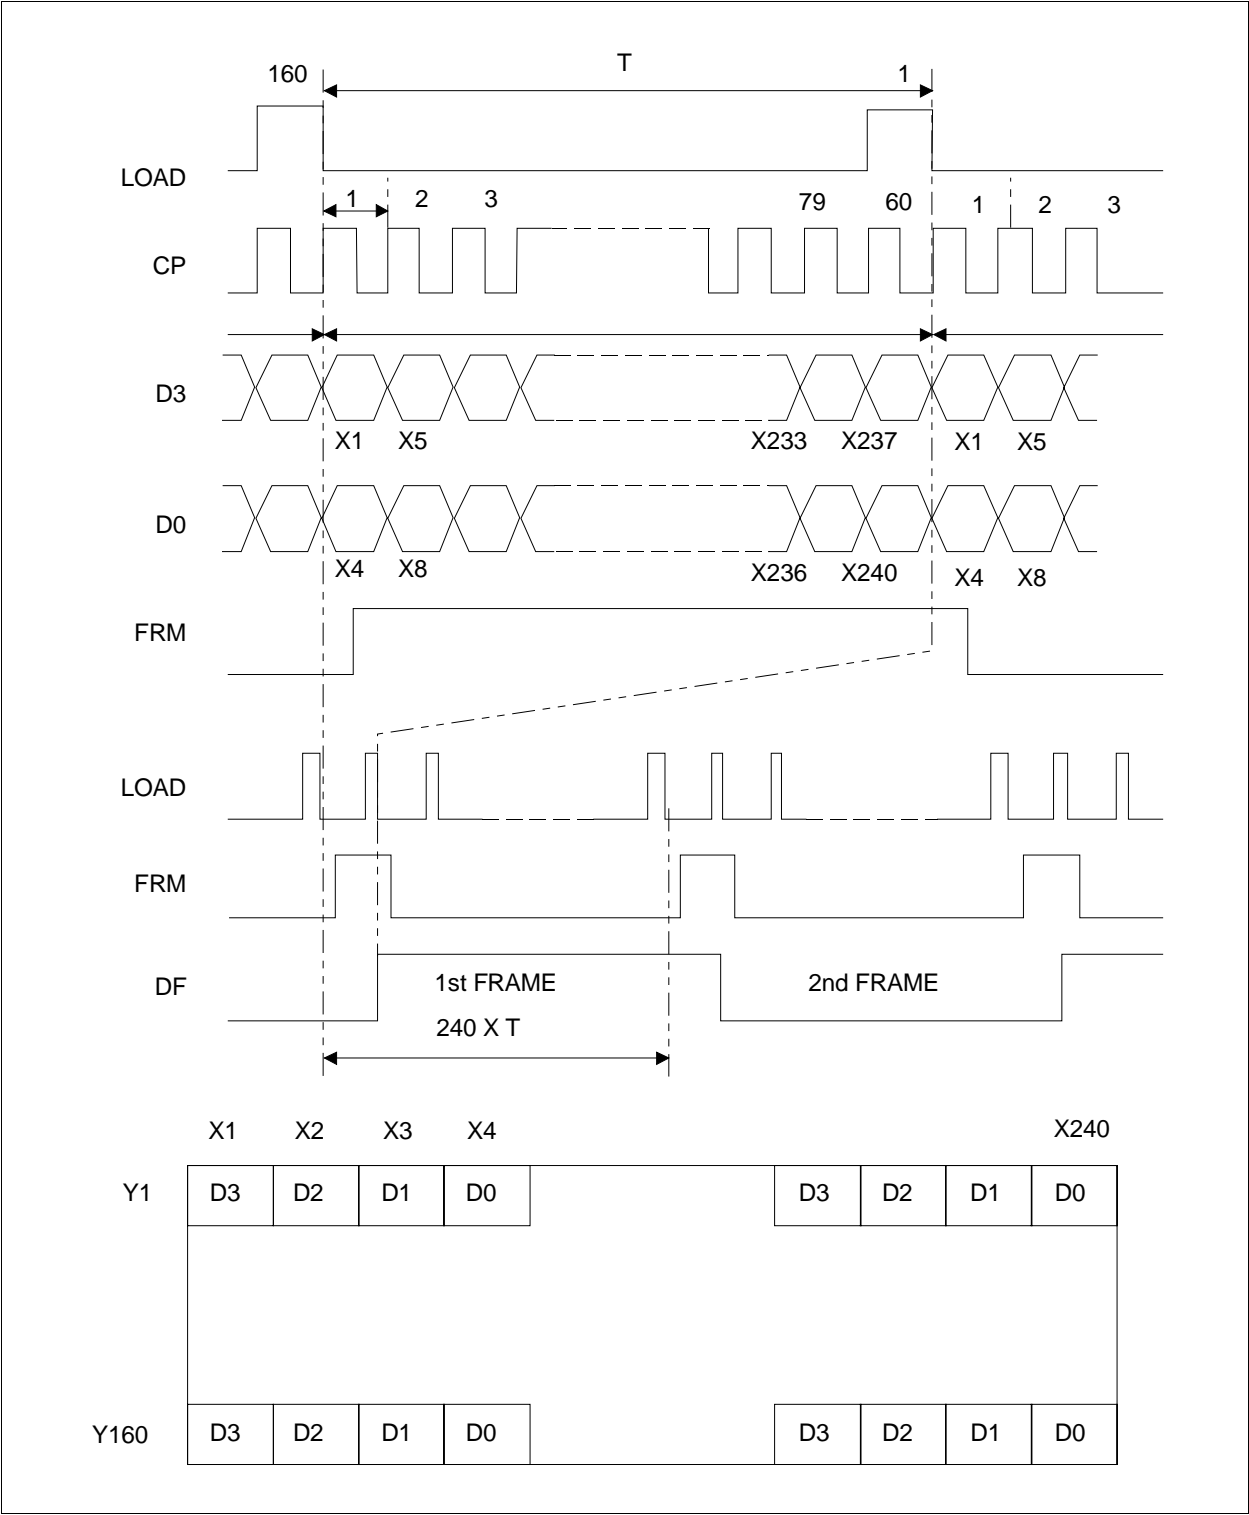
Signal Timing (2)

2.5   Power Supply ON/OFF Sequence

Microtips Technology Inc.
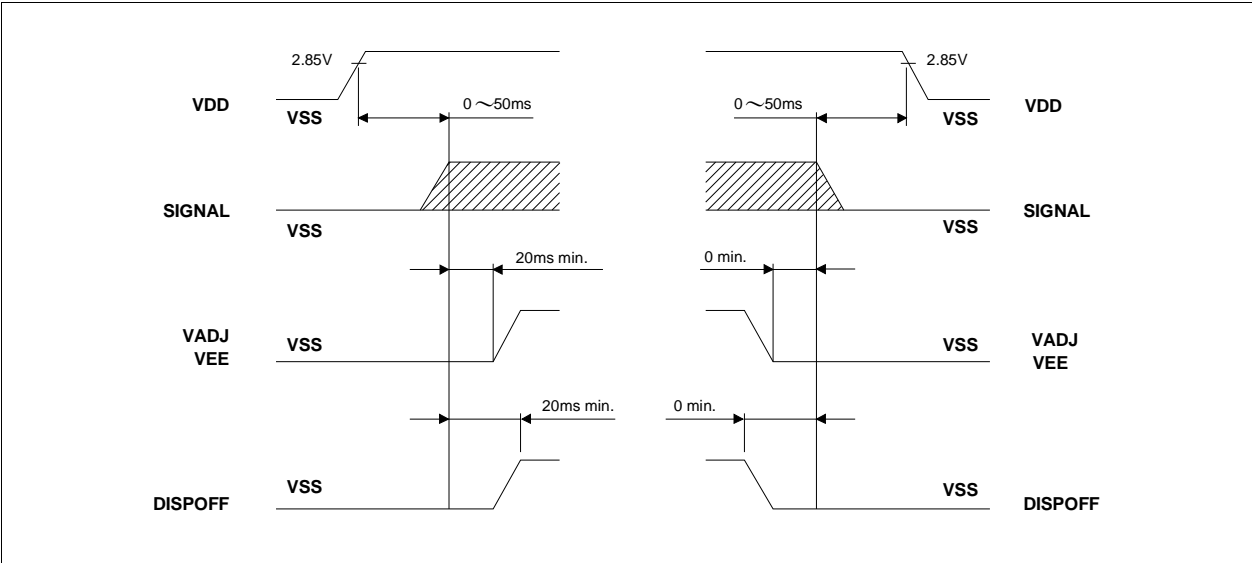
The missing pixels may occur when the LCM is driver beyond above power interface timing sequence.

2.6   Lighting Specifications

Microtips Technology Inc.

2.6.1 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Voltage	V_{MAX}	Ta= 25^{0}C	40	--	120	V_{RMS}
Frequency	F_{MAX}		50	--	1000	Hz

2.6.2 Operating Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Voltage	V_{AC}	Ta= 25^{0}C	--	100	--	V_{RMS}
Frequency	f_O		--	400	--	Hz
Luminosity*	L	Ta= 25^{0}C V_{AC} =100 V_{RMS} f_O=400Hz	40	--	--	cd/m^2
Current Consumption	I		--	--	0.2	mA/cm^2
C.I.E.of 1931	X		0.15	0.18	0.21	--
	Y		0.35	0.38	0.41	--
Lifetime	--		--	2000	--	HRs
Color	--		Blue Green			

*The luminosity is measured from the surface of EL only.

** Time to half luminance.

2.7 Spec. for touch panel

Microtips Technology Inc.

Item	Unit	Standard value			Note
		Min.	Typ.	Max.	
Linearity	%	-1.5	--	1.5	
Terminal resistance	Ω	200	--	900	X-axis
	Ω	200	--	900	Y-axis
Operating Voltage	V	--	--	7.0	
Insulation resistance	MΩ	20	--	--	DC25V
Chattering	ms	--	--	10	@100k ohm pull-up
Transparency	%	80	--	--	
Operating force	g	--	--	80	Stylus input: R0.8 polyacetal pen
	g	--	--	80	Finger input : R8.0 silicon rubber
Newton ring	No unusual interference finger must show when seen through the surface sheet.				Detail criterion for inspection refer attached inspection sheet.

Note : Clear type touch panel.

3. <u>Optical Specifications</u>

3.1 LCD Driving Voltage Recommended

Microtips Technology Inc.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
LCD Driving Voltage Note 1	V_O -V_{SS}	Ta = -20 °C	--	21.11	--	V
		Ta = 25 °C	17.89	18.49	19.09	V
		Ta = 70 °C	--	16.28	--	V

Note 1 : Voltage (Applied actual waveform to LCD Module) for the best contrast. The range of minimum and maximum shows tolerance of the operating voltage. The specified contrast ratio and response time are not guaranteed over the entire range.

3.2 Optical Characteristics

Ta=25 °C, 1/160 Duty, 1/13 Bias, (Note 4), $\theta = 0°$, $\phi = $ --°

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Units
Contrast Ratio Note 1		C	$\theta = 0°$, $\phi = 0°$	--	3.0	--	--
Viewing Angle. CR$\geqq$2	Front-Back		θ_f - θ_b, $\phi = 0°$	+38	to	-29	deg.
(Shown in 3.3)	Left-Right		θ_l - θ_r, $\phi = 0°$	+30	to	-32	deg.
Response Time	Rise Note 2	T_{ON}	Ta = -20 °C	--	2010	4020	msec
	Decay Note 3	T_{OFF}		--	8200	16400	msec
	Rise Note 2	T_{ON}	Ta = 25 °C	--	140	280	msec
	Decay Note 3	T_{OFF}		--	255	510	msec
	Rise Note 2	T_{ON}	Ta = 70 °C	--	75		msec
	Decay Note 3	T_{OFF}		--	100		msec

Note 1 : Contrast ratio is defined as follows.
$CR = L_{OFF} / L_{ON}$
L_{ON} : Luminance of the ON segments, L_{OFF} : Luminance of the OFF segments

Note 2 : The time that the luminance level reaches 90% of the saturation level from 0% when ON signal is applied.

Note 3 : The time that the luminance level reaches 10% of the saturation level from 100% when OFF signal is applied.

Note 4 : Definition of Driving Voltage V_D. Assuming that the typical driving waveforms shown below are applied to the LCD Panel at /A Duty - 1/B Bias (A : Duty Number, B : Bias Number). Driving voltage V_D is defined s follows: $V_D = (Vth1+Vth2) / 2$

Vth1 : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the ON signal is applied to.

Vth2 : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the OFF signal is applied to.

Selected state (ON SIGNAL)   Unselected state (OFF SIGNAL)
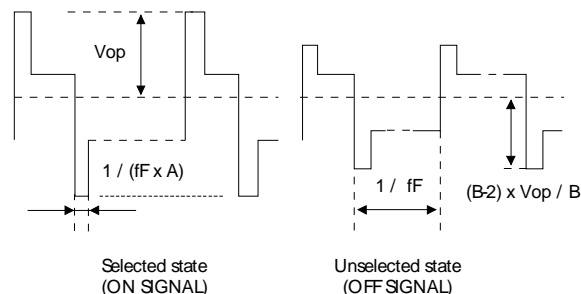
3.3 Definition of Viewing Angle and Optimum Viewing Area

Microtips Technology Inc.

Normal Line
$\theta = 0^o$

θ : Viewing Angle
ϕ : Viewing Direction

12 O'clock
$\phi_B = 90^o$

θ_L θ_R

θ_B

θ_F

9 O'clock
$\phi_L = 180^o$

3 O'clock
$\phi_R = 0^o$

ϕ

6 O'clock
$\phi_F = 270^o$

3.4   Definition of Viewing Angle θ_f and θ_b

Cmax.

2.0

θ_f θ_b

Viewing angles θ (ϕ fixed)

Optimum viewing angle with the naked
eye and viewing angle θ at Cmax.
Above are not always the same.
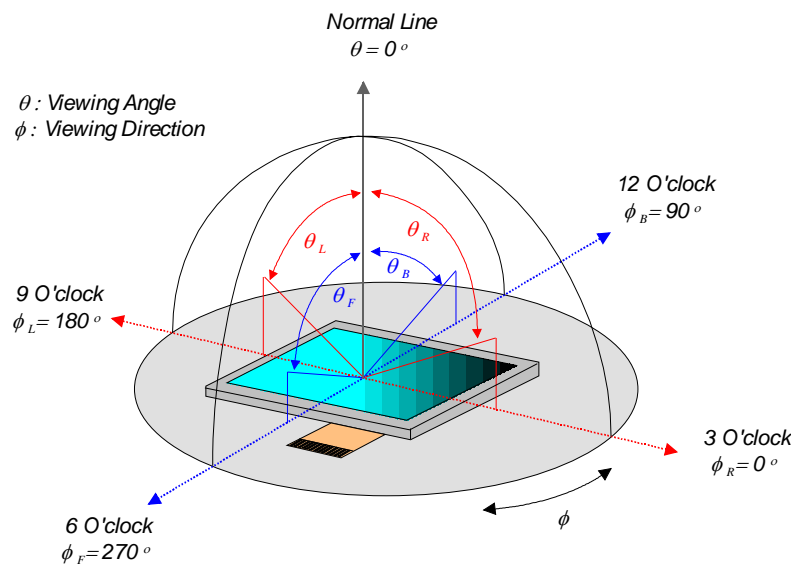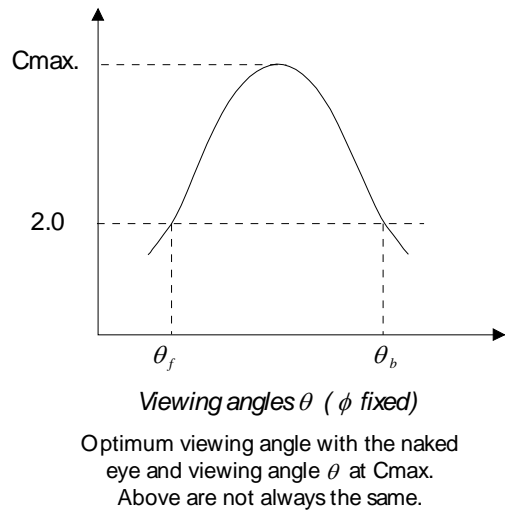
3.5   Definition of Contrast C, *C= Brightness of selected dot (B1)/ Brightness of unselected dot (B2)*

(%)

B1

Dark

unselected portion brightness
curve (bias voltage applied)

Brightness

selected portion
brightness curve

B2

Bright

Operation Voltage (V)
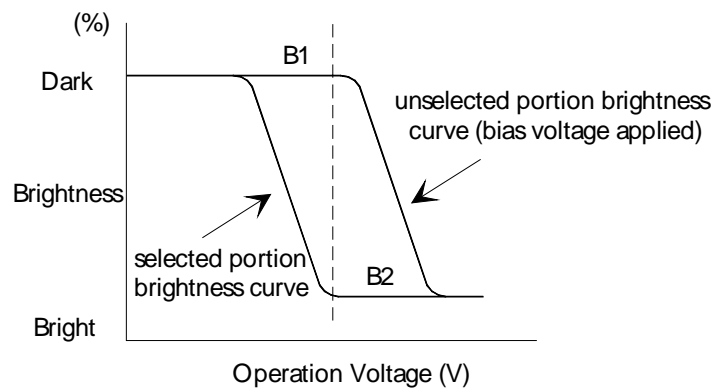
4.   I/O Terminal

Microtips Technology Inc.

4.1 Pin Assignment

No.	Symbol	Level	Function
1	V5	--	Power supply for LCD drive
2	V2	--	Power supply for LCD drive
3	Vo (V_{EE})	--	Power supply for LCD drive
4	V_{DD}	--	Power supply for logic system
5	FLM (EIO_1)	I/O	Input/output for chip select or data of shift register
6	F_{GND}	--	Frame Ground.
7	Load	I	Latch pulse input/shift clock input for shift register
8	V_{SS}	--	Ground pin connects to 0V
9	DF(M)	I	AV converting signal input for LCD drive waveform
10	/DISPOFF	I	Control input pin for output deselect level
11	CP	I	Display data shift clock input for segment mode
12	V4	--	Power supply for LCD drive
13	V3	--	Power supply for LCD drive
14	D3	I/O	Display Data
15	D2	I/O	Display Data
16	D1	I/O	Display Data
17	D0	I/O	Display Data
18	NC	--	No connection

EL pin out

No.	Symbol	Level	Function
1	EL 1	--	Power supply for EL B/L
2	EL 2	--	Power supply for EL B/L

TOUCH PANEL (CN3)

| Pin No.	Symbol	Level	Function
1.	YD (Y2)	--	Touch Panel Signal (Y-position Down)
2.	XL (X1)	--	Touch Panel Signal (X-position Left)
3.	YU (Y1)	--	Touch Panel Signal (Y-position Upper)
4.	XR (X2)	--	Touch Panel Signal (X-position Right)

4.2 Example of Power Supply

It is recommended to apply a potentiometer for the contrasts adjust due to the tolerance of the driving voltage and
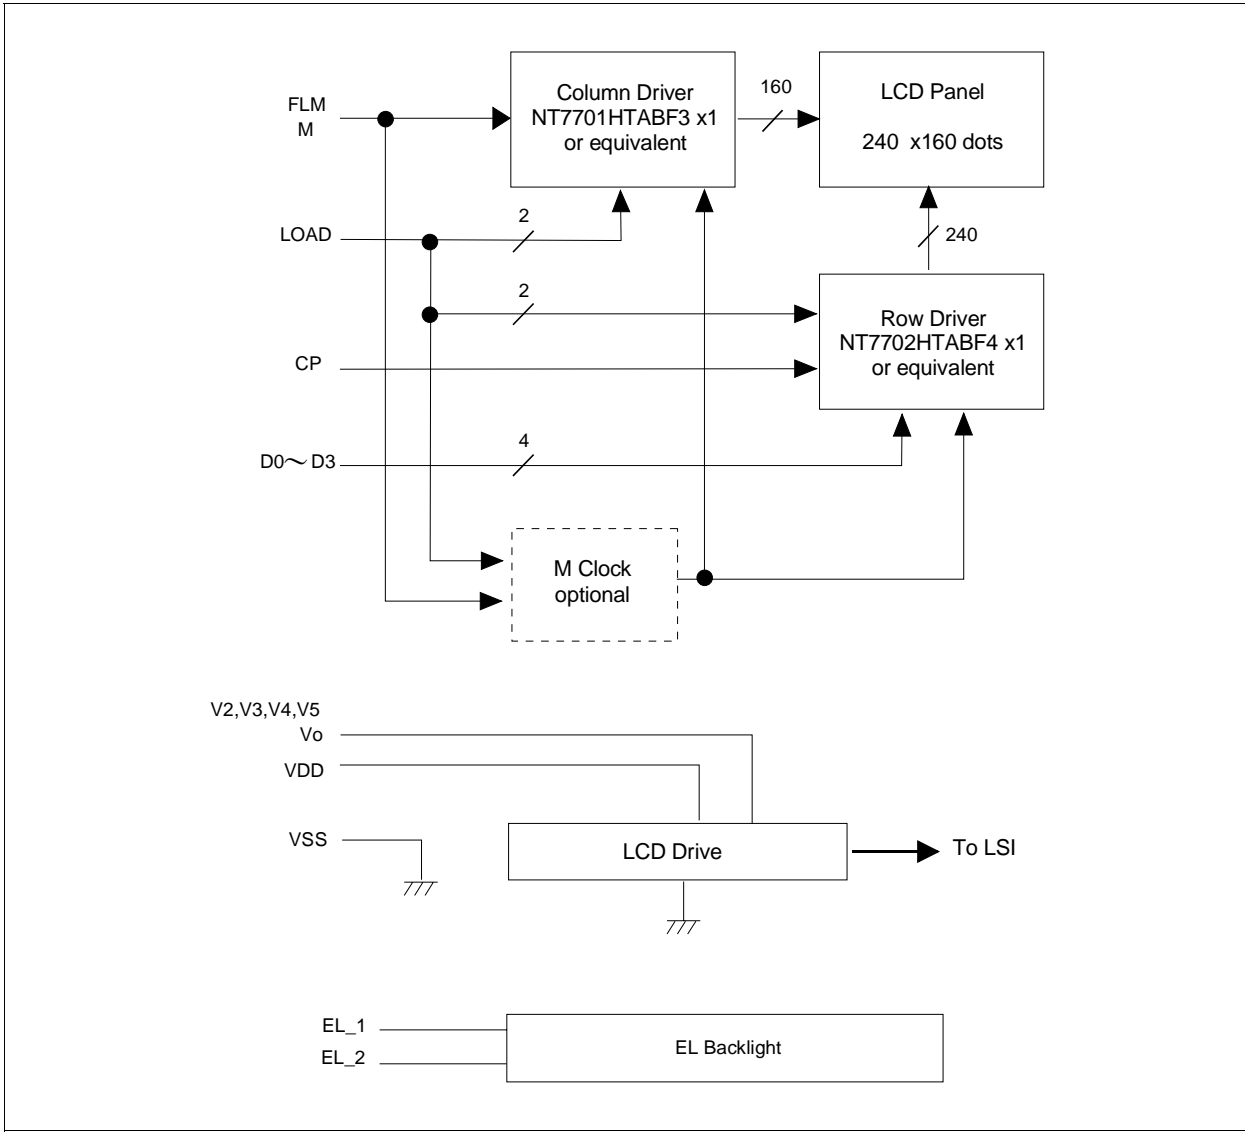
Microtips Technology Inc.

its temperature dependence.

R1+R2+VR=10 ～ 20K
Tr = 2SA1202 or equivalent
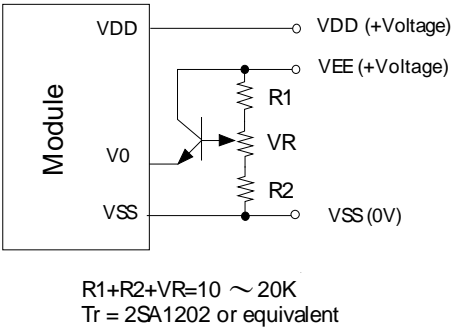
4.3 Block Diagram
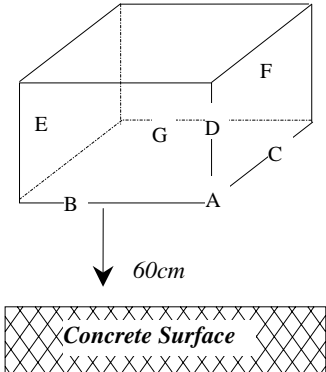
5. Reliability Test

5.1 Test Item

Microtips Technology Inc.

<u>No change on display and in operation</u> under the following test condition.

No.	Test Item	Description	Condition	Note
1.	High Temperature (Operation)	Durability test under long time high temperature with electrical stress (voltage, current)	60°C ± 2°C 96hrs	
2.	High Temperature (Storage)	Durability test under long time high temperature storage	60°C ± 2°C 96hrs	4
3.	Low Temperature (Operation)	Durability test under long time low temperature with electrical stress (voltage, current)	-10°C ± 2°C, 96hrs	3
4.	Low Temperature (Storage)	Durability test under long time low temperature storage	-20°C ± 2°C, 96hrs	3, 4
5.	Damp Proof Test	Durability test under long time high temperature and high humidity	40°C± 2°C, 80% RH 96hrs	3 , 4
6.	Vibration Test	Total fixed amplitude: 1.5mm Vibration frequency: 10～55Hz One cycle 60 seconds to 3 directions of X, Y, Z for each 15 minutes	- -	5
7.	Drop Test	To be measured after dropping from 60cm high on the concrete surface in packing state. *Dropping method corner dropping* *A corner: once* *Edge dropping* *B, C, D edge: once* *Face dropping* *E, F, G face: once* *60cm* ↓ **Concrete Surface**		

Note 1: Unless otherwise specified, tests will be conducted under the following condition,
  Temperature   : 25°C ± 2°C
  Humidity   : 65% ± 5%
Note 2: Unless otherwise specified, tests will be not conducted under functioning state.
Note 3: No dew condensation to be observed.
Note 4: The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
Note 5: Vibration test will be conducted to the product itself without putting it in a container.

5.2 Judgment Standard

Failure Mode	Test Item	Judgment Standard

Microtips Technology Inc.

	1	2	3	4	5	6	7	
Orientation	*	*	*	*	*			No remarkable degradation of appearance under bias/ non-bias condition
Current Value (IAC)	*	*	*	*	*			No remarkable increase
Contrast	*		*	*	*			No remarkable poor contrast
Domain	*	*	*	*	*			Less than 20% of all dots have reverse tilt of more than on third of one dot area.
Bubble (Inside Cell)	*	*	*	*	*	*		As per "Appearance Standard" (Note. Including one which disappear after 25°C 2H)
Polarizer	*				*	*		As per "Appearance Standard" no remarkable appearance change
Glass Damage							*	As per "Appearance Standard"

Note. 1. * is strong linkage between Failure Mode and Test Item.
   2. Number of Test Item should be referred to former page.
   3. Judgment and Standard value should be fixed by other inspection standard and criteria samples.

6.   <u>Appearance Standards</u>

   6.1   Inspection Conditions

   The LCD shall be inspected under 40W white fluorescent light. The distance between the eyes and the sample shall

Microtips Technology Inc.

be more than 30cm. All directions for inspecting the sample should be within 45° against perpendicular line.
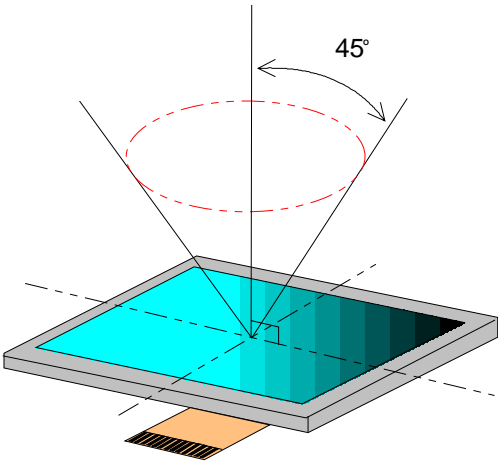
6.2   Definition of Applicable Zones
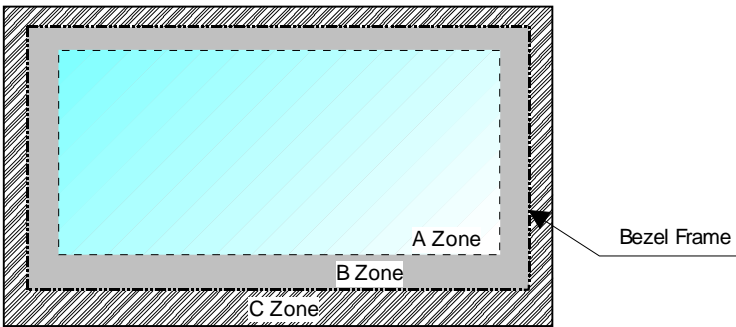
A Zone : Active display area
B Zone : Area from outside of "A Zone" to validity viewing area
C Zone : Rest parts
A Zone + B Zone = Validity viewing area

6.3   Standards

No.	Parameter	Criteria
		(1) Round Shape

1.		Zone Dimension (mm)		Acceptable Number		
				A	B	C
		D $\leq$ 0.2		*	*	*
		0.2 < D $\leq$ 0.3		3	5	*
		0.3 < D $\leq$ 0.4		2	3	*
		0.4 < D $\leq$ 0.5		0	1	*
		0.5 < D		0	0	*

D = (Long + Short)/2   *: Disregard

(2) Line Shape

Zone X (mm)	Zone Y (mm)	Acceptable Number		
		A	B	C
- -	0.03 $\geq$ W	*	*	*
2.0 $\geq$ L	0.05 $\geq$ W	3	3	*
1.0 $\geq$ L	0.1 $\geq$ W	3	3	*
- -	0.1 < W	In the same way (1)		

X : Length   Y: Width   *: Disregard

Total defects shall not exceed 5.

2.	Air Bubbles (between glass & polarizer)	Zone Dimension (mm)		Acceptable Number		
				A	B	C
		D $\leq$ 0.3		*	*	*
		0.3 < D $\leq$ 0.4		3	*	*
		0.4 < D $\leq$ 0.6		2	3	*
		0.6 < D		0	0	*

*: Disregard

Total defects shall not exceed 3.
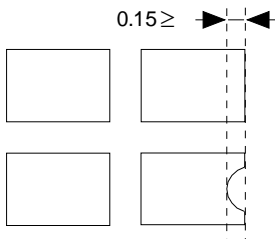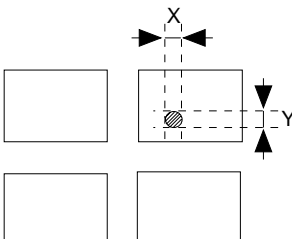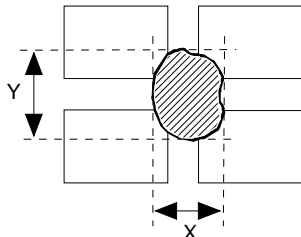
To be continued……

No.	Parameter	Criteria
		(1) Dot Shape (with Dent) As per the sketch of left hand.

Microtips Technology Inc.

3.		0.15≥ (2) Dot Shape (with Projection) Should not be connected to next dot. (3) Pin Hole X Y (X+Y)/2 ≤ 0.2mm (Less than 0.1mm is no counted.) (4) Deformation (X+Y)/2 ≤ 0.2mm Y X Total acceptable number: 1/dot, 5/cell (Defect number of (4): 1pc.)
4.	Polarizer Scratches	Not to be conspicuous defects.
5.	Polarizer Dirts	I f the stains are removed easily from LCDP surface, the module is not defective.
6.	Complex Foreign Substance Defects	Black spots, line shaped foreign substance or air bubbles between glass & polarizer should be 5pcs maximum in total.
7.	Distance between different Foreign Substance defects	D ≤ 0.2 : 20mm or more 0.2 < D : 40mm or more

7. <u>Handling and Precautions</u>

The Following precautions will guide you in handling our product correctly.

Microtips Technology Inc.

1   Liquid crystal display devices

      1.1   The liquid crystal display device panel used in the liquid crystal display module is made of plate glass. Avoid any strong mechanical shock. Should the glass break handle it with care.

      1.2   The polarizer adhering to the surface of the LCD is made of a soft material. Guard against scratching it.

2   Care of the liquid crystal display module against static electricity discharge.

      2.1   When working with the module, be sure to ground your body and any electrical equipment you may be using. We strongly recommend the use of anti static mats (made of rubber), to protect work tables against the hazards of electrical shock.

      2.2   Avoid the use of work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

      2.3   Slowly and carefully remove the protective film from the LCD module, since this operation can generate static electricity.

3   When the LCD module alone must be stored for long periods of time:

      3.1   Protect the modules from high temperature and humidity.

      3.2   Keep the modules out of direct sunlight or direct exposure to ultra-violet rays.

      3.3   Protect the modules from excessive external forces.

4   Use the module with a power supply that is equipped with an over current protector circuit, since the module is not provided with this protective feature.

5   Do not ingest the LCD fluid itself should it leak out of a damaged LCD module. Should hands or clothing come in contact with LCD fluid, wash immediately with soap.

6   Conductivity is not guaranteed for models that use metal holders where solder connections between the metal holder and the PCB are not used. Please contact us to discuss appropriate ways to assure conductivity.

8.   Warranty:

This product has been manufactured to your company's specifications as a part for use in your company's general

Microtips Technology Inc.

electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in medical devices, nuclear power control equipment, aerospace equipment, fire and security systems, or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required. If the product is to be used in any of the above applications, we will need to enter into a separate product liability agreement.

1   We cannot accept responsibility for any defect, which may arise from additional manufacturing of the product (including disassembly and reassembly), after product delivery.

2   We cannot accept responsibility for any defect, which may arise after the application of strong external force to the product.

3   We cannot accept responsibility for any defect, which may arise due to the application of static electricity after the product has passed your company's acceptance inspection procedures.

4   We cannot accept responsibility for industrial property, which may arise through the use of your product, with exception to those issues relating directly to the structure or method of manufacturing of our product. Microtips-origin longer than one year from Microtips production.

9.   Dimensional Outlines

- See the next page……..

Microtips Technology Inc.

Note:

Otherwise specified tol: ±0.4

PIN ASSIGNMENT

1.	V5	5.	FLM	9.	DF	13.	V3	17.	DB0
2.	V2	6.	F_GND	10.	DISP	14.	DB3	18.	NC
3.	VEE	7.	LOAD	11.	CP	15.	DB2	19.	
4.	VDD	8.	VSS	12.	V4	16.	DB1	20.	

TPD

1.	Y2	3.	Y1
2.	X1	4.	X2

4.55   43.5 TPD V.A
40.4 TPD A.A
38.38 LCD A.A

1.35±0.5 T/P

74.6±0.3   62.2 TPD V.A   59.6 TPD A.A   57.59 LCD A.A

X2
Y2   Y1
X1

6
4
P2x3=6
4
9
1
31.8±1
25±0.5
30±1
4.2
5±0.5

1
18
6.7±0.3
15.5±0.5   5.05
56.1±0.3
26.3±0.3

Support tape

0.3±0.05
4.65Max.
5.55Max.
4.7

Microtips Technology

Troy He Chris Luo Suny T.

NO.		
PART NAME	M-24160B (1.1t TPD+EL)	
DRAWN	CHECK	APP'D
Q'TY		
UNIT:MM	DATE:	12/18/00'
SCALE: 1/1	MATERIAL	
PRODUCT: MTG-24160B		
DWG NO.: G24160B5		
FILE: DWG\MTG240\G24160B		
SHEET 1 / 1	Rev: B	

UNLESS OTHERWISE SPECIFIED
TOLERANCE ON
FRACTIONS DECIMALS ANGLES
0.10 0.5°
FINISH

REV.	DESCRIPTION	DRAWN	CHECK	APP'D	DATE
A	Production release	Chris Luo ALG	CAROL		8/30/02'
B	REDIFINE PIN OF CONNECT SIDE				10/06/05'

0.23
0.01
0.23
0.01
240x160
Dots