
UNCONTROLLED DOCUMENT

Ø4.00 [Ø0.157] 2.80 [0.110]
ø1.50 [ø0.059]

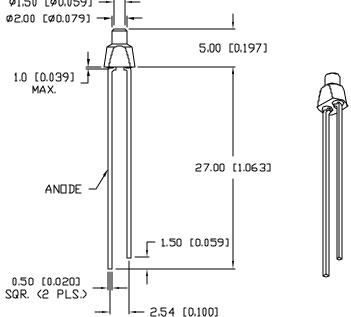

PART NUMBER SSL-LX20465GD

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	UPDATED SPECS.	2.16,95
В	E.C.N. #10BRDR, & REDRAWN IN 3D,	9.27.00

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		5 6 5		nm		
FORWARD VOLTAGE		2.2	2.6	$V_{\mathbf{f}}$		
REVERSE VOLTAGE	5.0			٧ _٢	I _r =100μΑ	
AXIAL INTENSITY		10		mcd	$I_f = 20mA$	
VIEWING ANGLE		70		2x theta		
EMITTED COLOR:	GREEN					
EPOXY LENS FINISH:	GREEN T	OP DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
		LIMU
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	—1.6	mW/⁼C
OPERATING, STORAGE TEMP.	- 40 TO +85	·c
SOLDERING TEMP.	+ 260	.c
2.0mm FROM BODY		3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XXx=±0.5 (±0.020), XXXx=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002),

REV. PART NUMBER SSL-LX20465GD

T-2mm TAPER BODY LED, TOP DIFFUSED, 565nm GREEN, GREEN TOP DIFFUSED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTINUED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



BC

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: (847) 359-2790 WEB: http://www.lumex.com

CHECKED BY: APPROVED BY: DATE: 1,22,93 PAGE: 1 OF 1

> SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX20465GD