






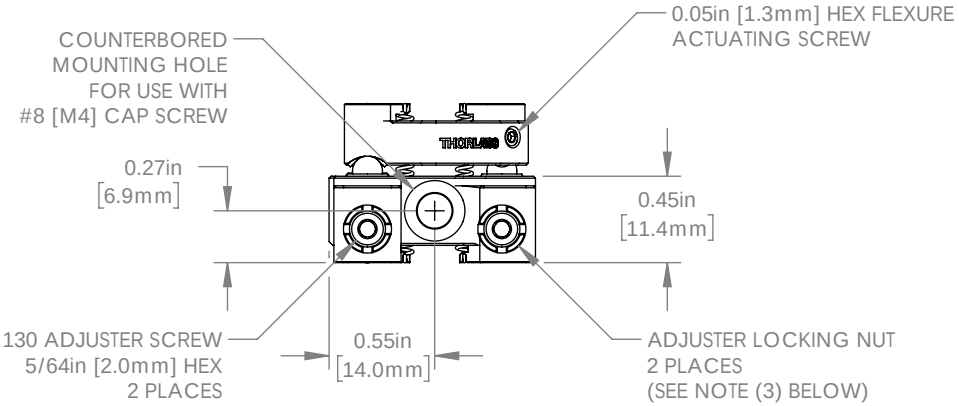

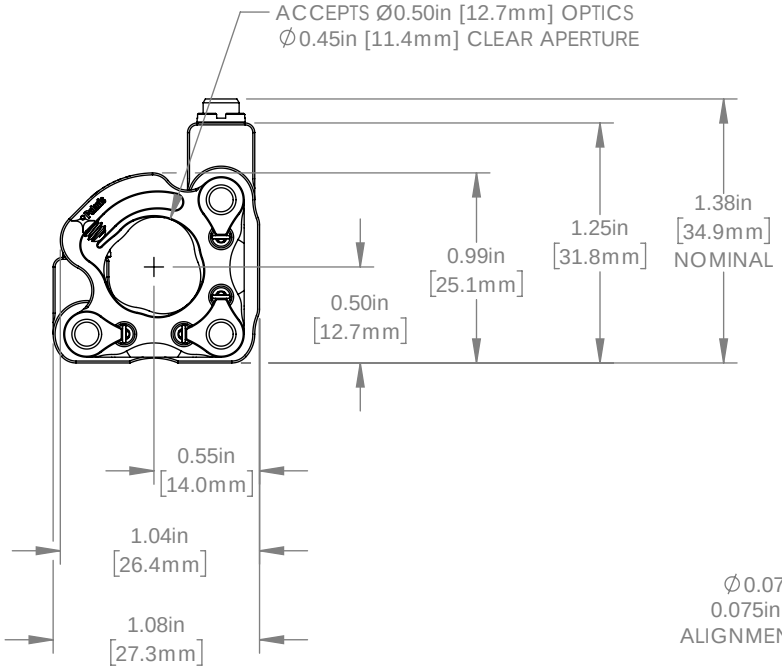

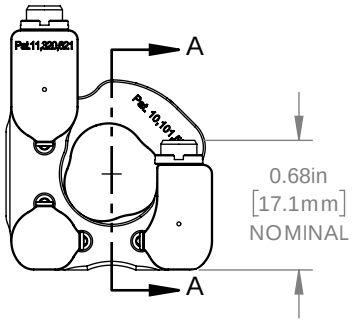

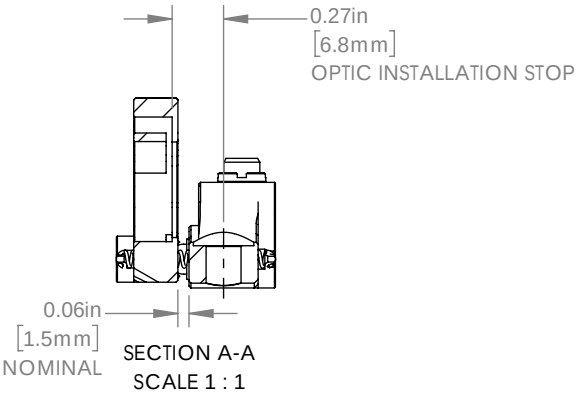

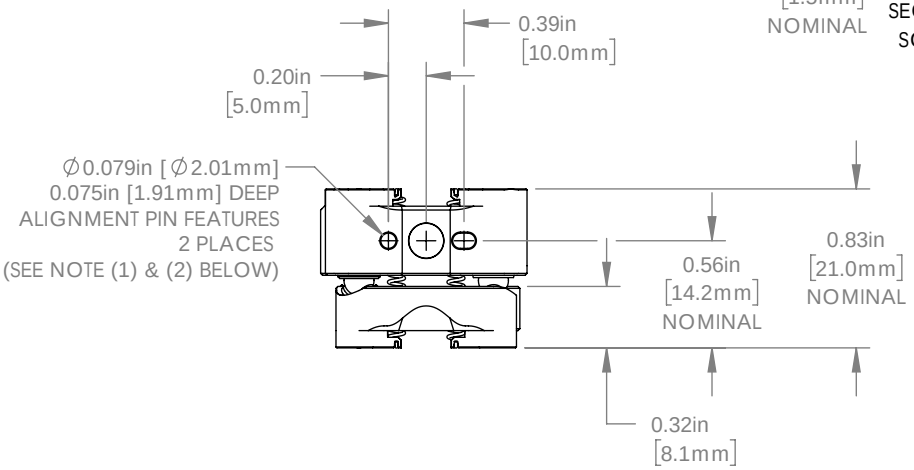

NOTE:
1) RECOMMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURES IS A STANDARD ∅2mm DIN 7-m6 (ISO 2338) GROUND DOWEL PIN (∅2.002 mm TO ∅2.008 mm).
2) FOR A ∅2mm X 5mm PIN, WE RECOMMEND ∅0.0791in TO ∅0.0796in X 0.175in ±0.002in DEEP HOLES BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF ±0.003in.
3) DESIGNED TO BE USED WITH POLARIS-T2 ADJUSTER TOOL.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BD	9/APR/23
APPROVAL	MP	15/OCT/25

COPYRIGHT © 2023 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

POLARIS TWO ADJUSTER HEX DRIVEN Ø1/2" SIDE CLAMPING MIRROR MOUNT

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
POLARIS-K05VS2	0.050 kg