



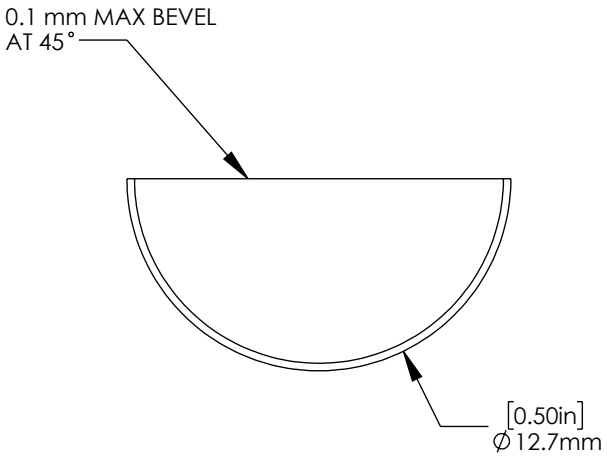

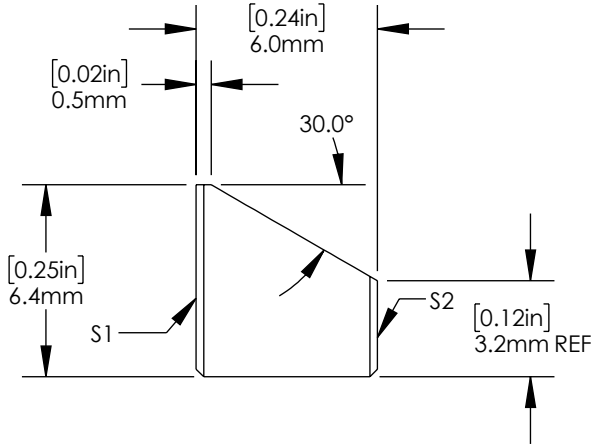

NOTES/SPECIFICATIONS

1. CLEAR APERTURE: > Ø 11.43 mm
2. SURFACE QUALITY: (S1) 40-20 SCRATCH DIG
3. SURFACE FLATNESS: (S1) λ/10 @ 633 nm
   (S2) FINE GROUND
4. PARALLELISM: ≤ 5 arcmin
5. DESIGN WAVELENGTH RANGE: 450 nm-20 µm
6. COATING (S1): PROTECTED SILVER
   Ravg:>97% FROM 450 nm-2 µm
   Ravg:>95% FROM 2-20 µm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BAG	12/JUNE/06
APPROVAL	NI	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø12.7 mm PROTECTED SILVER "D" SHAPED MIRROR 450 nm-20 µm

MATERIAL	REV
FUSED SILICA	C

ITEM #	APPROX WEIGHT
PFD05-03-P01	1 g