



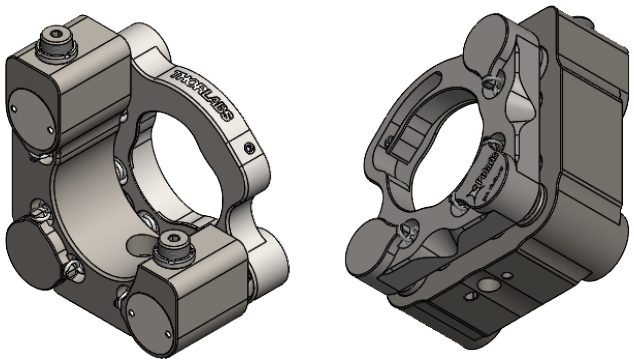


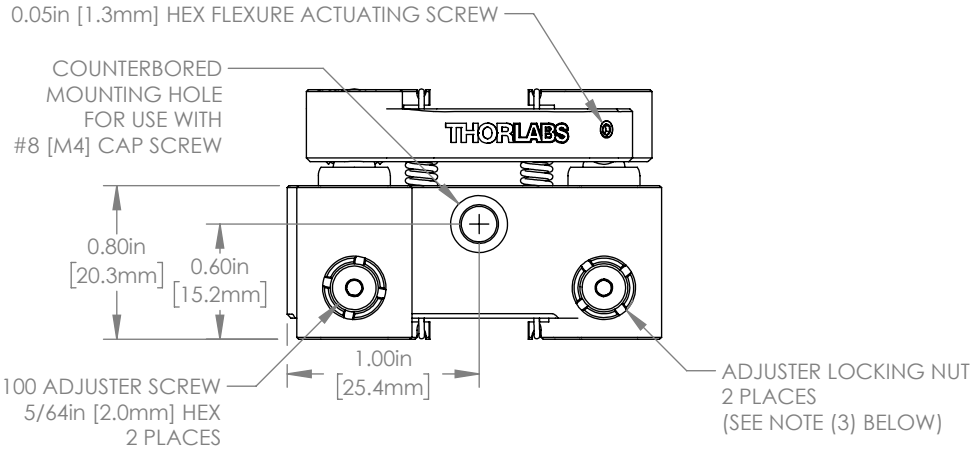


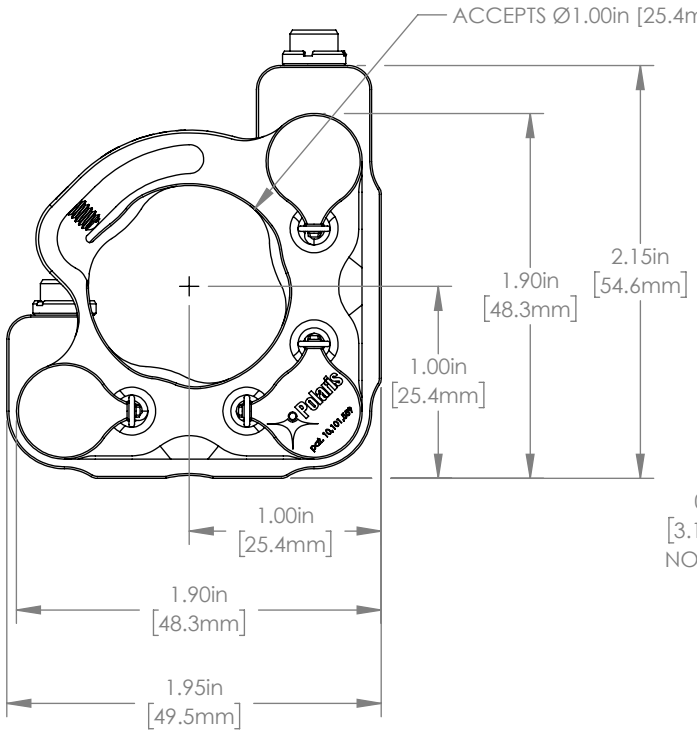

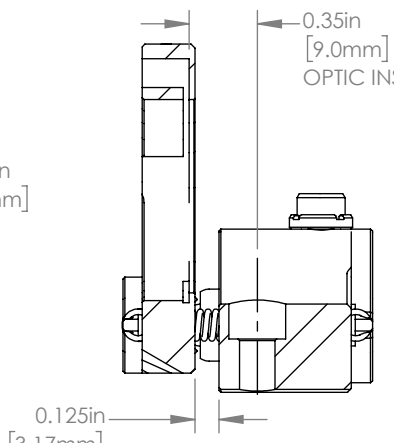

SECTION A-A
SCALE 1 : 1

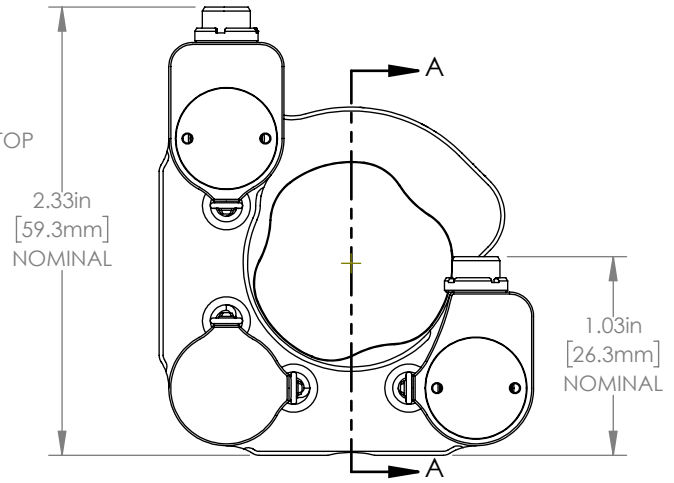

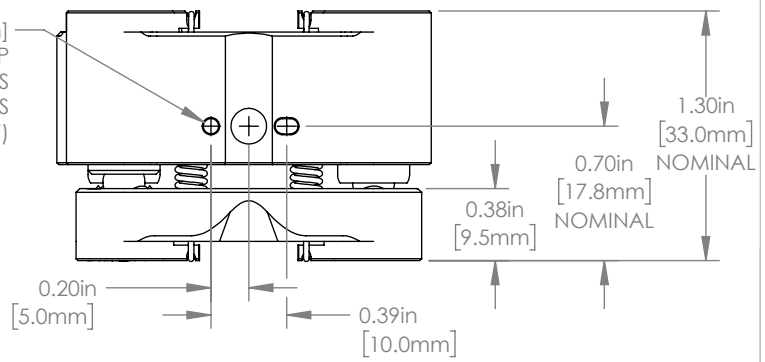

NOTE:
1) RECOMMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURES IS A STANDARD Ø2mm DIN 7-m6 (ISO 2338) GROUND DOWEL PIN (Ø2.002 mm TO Ø2.008 mm).
2) FOR A Ø2mm X 5mm PIN, WE RECOMMEND Ø0.0791in TO Ø0.0796in X 0.175in ±0.002in DEEP HOLES BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF ±0.003in.
3) DESIGNED TO BE USED WITH POLARIS-T2 ADJUSTER TOOL.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	ET	02/20/2020
APPROVAL	MJM	05/27/2020

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS

POLARIS TWO ADJUSTER HEX DRIVEN Ø1" SIDE CLAMPING MIRROR MOUNT

MATERIAL	REV
N/A	B

ITEM #	APPROX WEIGHT
POLARIS-K1VS2	0.24 kg