




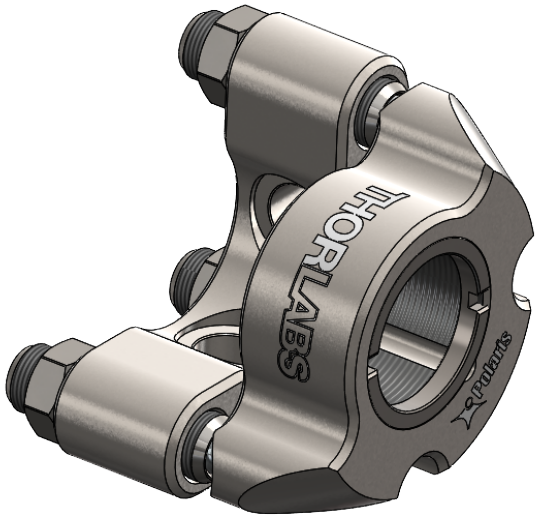


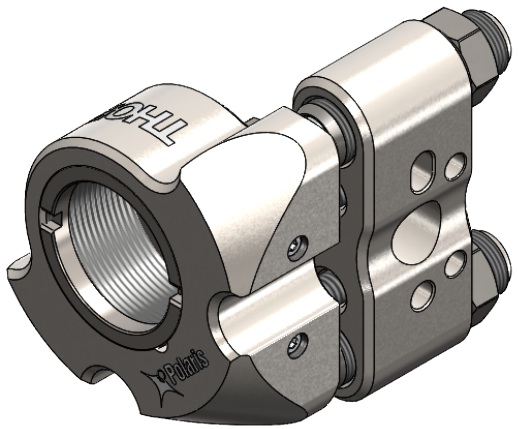

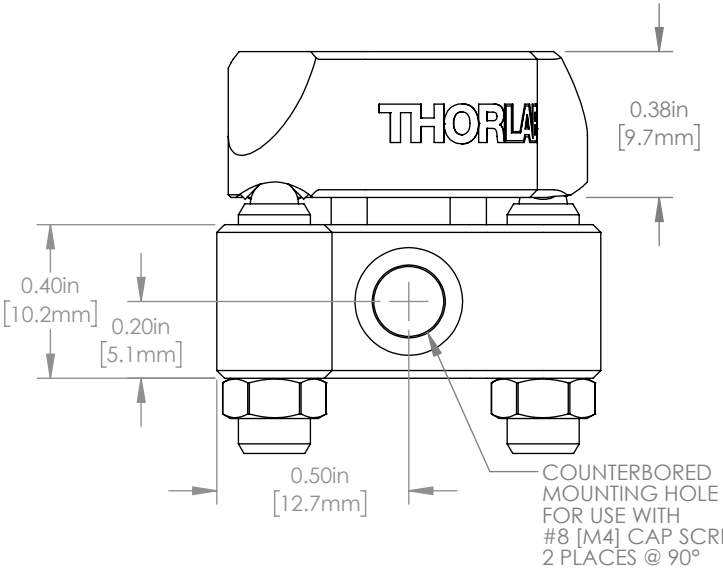

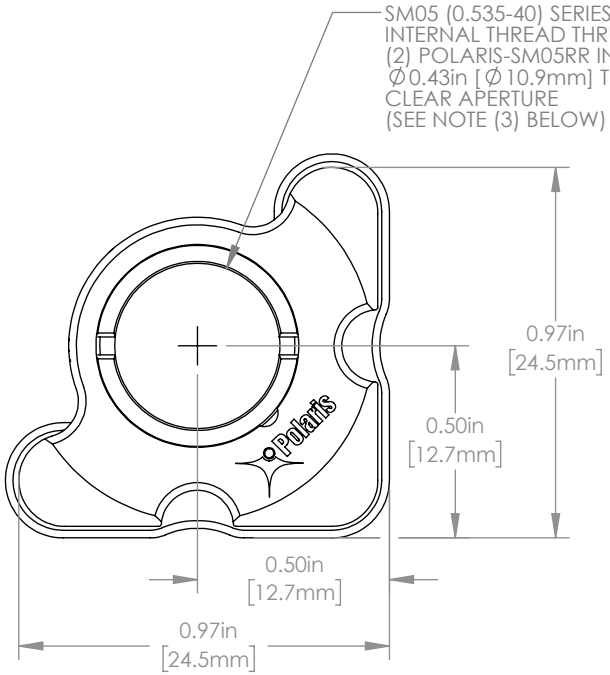

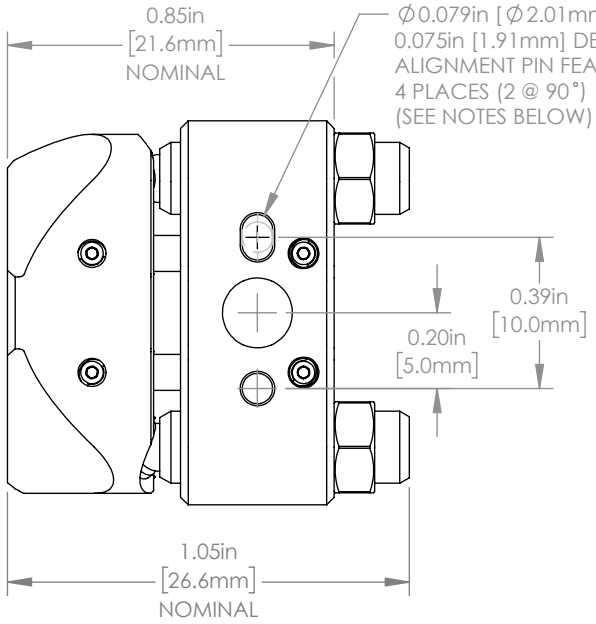

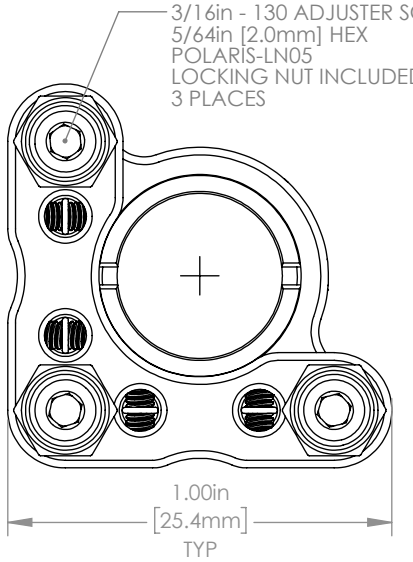

NOTE:

1) RECOMMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURES IS A STANDARD Ø2mm DIN 7-m6 (ISO 2338) GROUND DOWEL PIN (Ø2.002 mm TO Ø2.008 mm).
2) FOR A Ø2mm X 5mm PIN, WE RECOMMEND Ø0.0791in TO Ø0.0796in X 0.185in ±0.005in DEEP HOLES BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF ±0.003in.
3) ACCEPTS Ø0.50in [Ø12.7mm] OPTICS.
   3.1) MAX THICKNESS OF OPTIC 0.25in [6.4mm] IN-BETWEEN THE (2) POLARIS-SM05RR RETAINING RINGS.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GM	27/SEP/12
APPROVAL	BD	01/APR/14

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

POLARIS SM05
THREADED KINEMATIC MOUNT

MATERIAL	REV
N/A	G

ITEM #	APPROX WEIGHT
POLARIS-K05T6	0.04 kg