



ISOMETRIC VIEW
SCALE 1:1

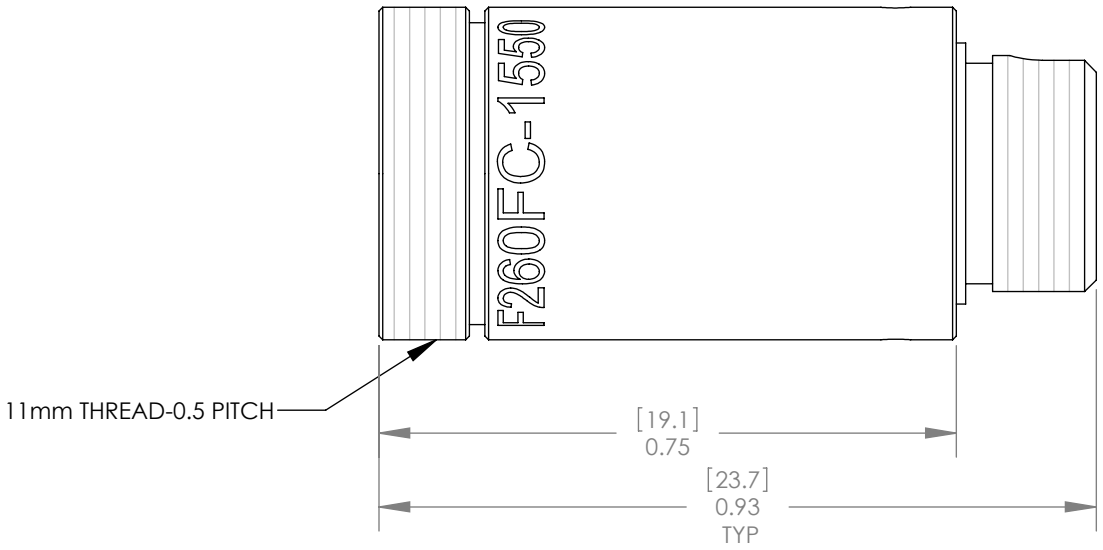

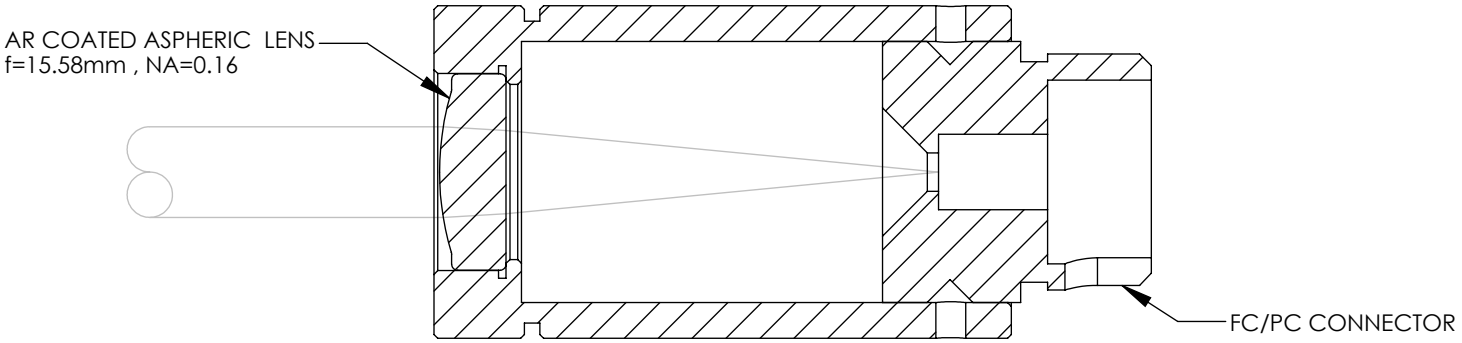

THEORETICAL $1/e^2$ OUTPUT BEAM DIAMETER	3.0mm
THEORETICAL FULL ANGLE BEAM DIVERGENCE	0.038°
AR COATING	1050-1620nm
FIBER USED FOR ALIGNMENT	SMF-28e
WAVELENGTH USED FOR ALIGNMENT	1550nm

THORLABS FIBER COLLIMATION PACKAGES
ARE DESIGNED TO COLLIMATE A LASER BEAM PROPAGATING OUT THE END OF AN OPTICAL FIBER. EACH COLLIMATION PACKAGE IS FACTORY ALIGNED SO THAT THE LENS IS ONE FOCAL LENGTH AWAY FROM THE OUTPUT END OF THE FIBER.

	NAME	DATE
DRAWN	GG	07/30/2010
ENG APPR.	WD	08/16/2010
MFG APPR.	DD	08/16/2010

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THORLABS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THORLABS, INC. IS PROHIBITED.

THORLABS INC. PO BOX 366 NEWTON NJ

TITLE: λ=1550nm FC/PC COLLIMATION PACKAGE, NA=0.16 f=15.58mm

MATERIAL:	SIZE	REV.
N/A	A	D

SCALE: 2:1	SHEET 1 OF 1

DWG. NO.	PART NO.
7524-E01	F260FC-1550

5 4 3 2 1