


Oscillator

Route cleanly and place near U1

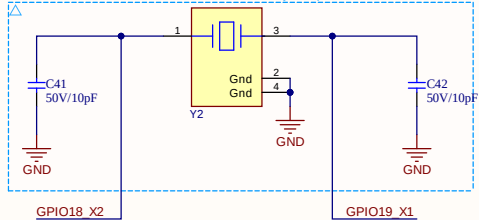


By default:







- Crystal Y2 is connected between GPIO18_X2 and GPIO19_X1.
- GPIO18_BP AND GPIO19_BP are connected to the BoosterPack headers.

If GPIO18 and GPIO 19 are needed at the Boosterpack Headers:





- Remove R32 and R33, populate R36 and R37 with 0 ohm resistors
- The F28002x device's internal oscillator will need to be used

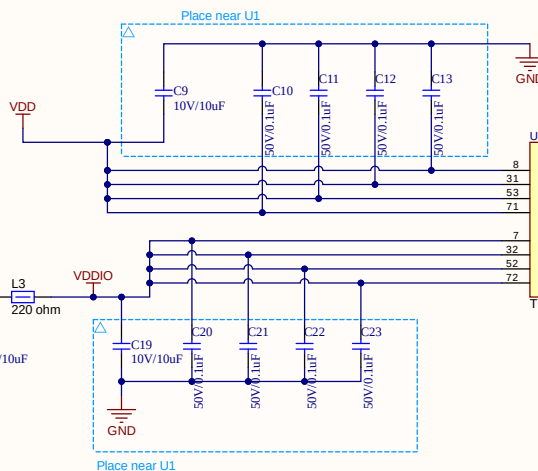

JTAG

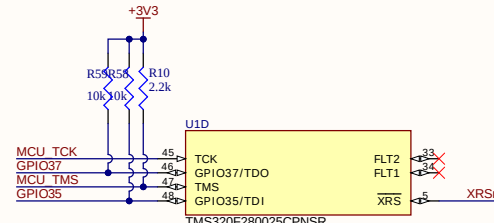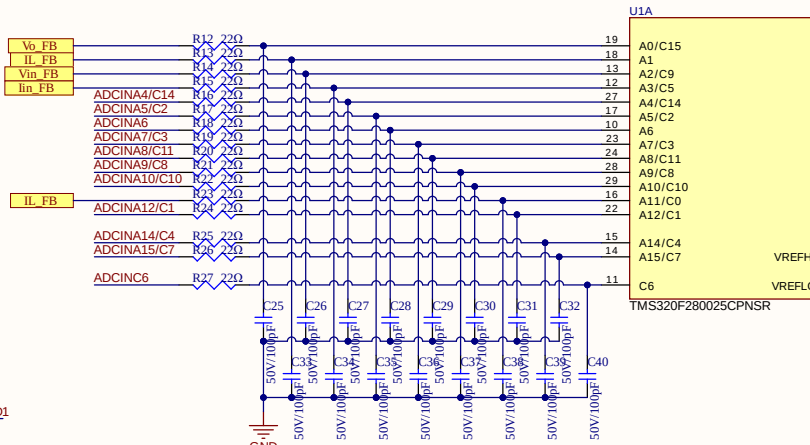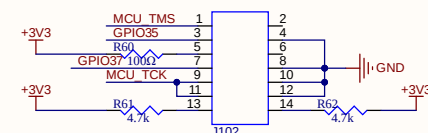

Reset Button

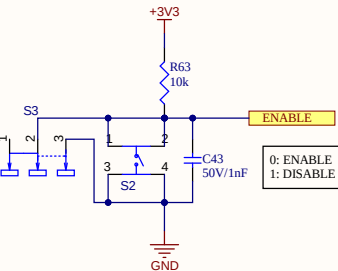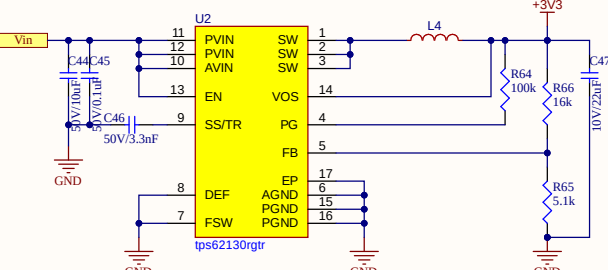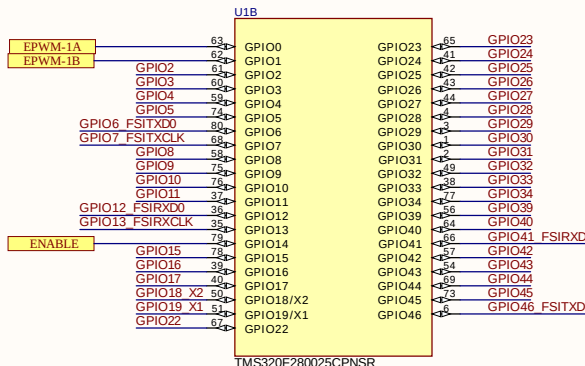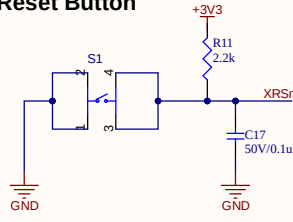

Title		
Size	Number	Revision
A3		
Date:	7/24/2026	Sheet of
File:	F:\数字电路\280025C_min_sys.Sch	Drawn By:

