


VLAN Tags

are inserted between
Source Address and Type/Length fields

VLAN tagging increases
MTU from 1518 to 1522

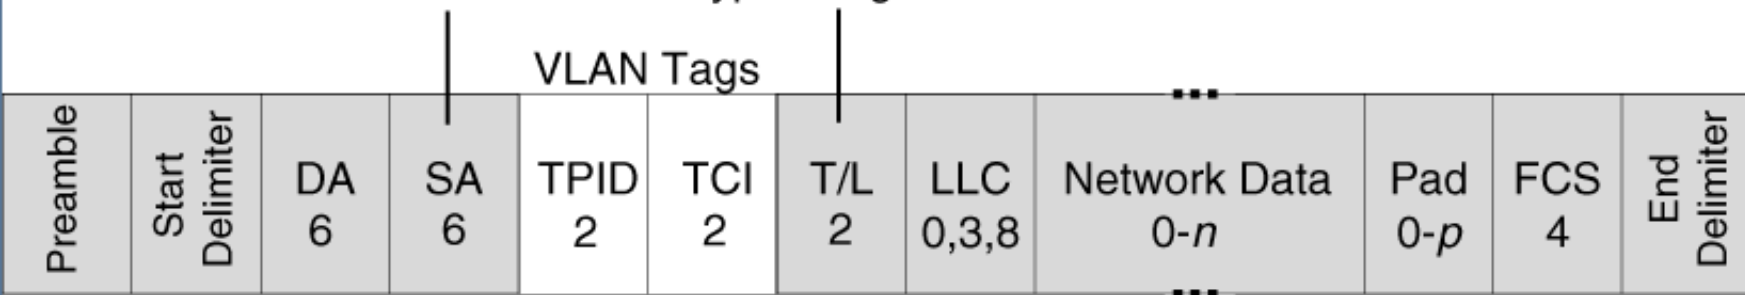

802.3ac VLAN Tagged Header

TPID (2 bytes) = Tag Protocol Identifier (always = 0x8100)

TCI (2 bytes) = Tag Control Information:

Priority 3 bits

CFI 1 bit (always = 0)

VLAN ID 12 bits