



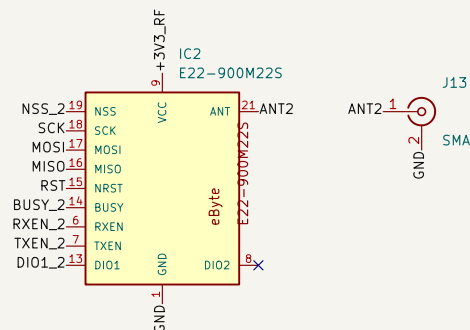
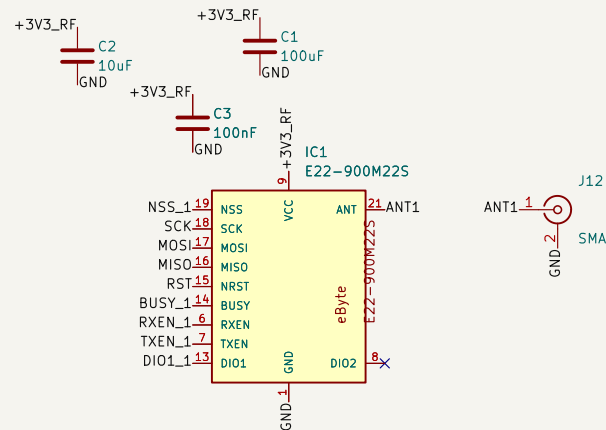
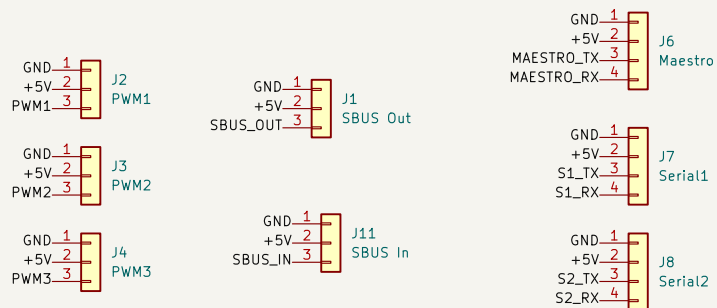


PCB LAYOUT NOTES: (4-layer: L1 Sig / L2 GND / L3 PWR / L4 Sig)
 RF (ANT1, ANT2): 50 ohm CPWG, Top layer only, NO vias, keep SHORT.
 Ground-via fence beside each ANT trace; solid L2 GND underneath.
 E22 RF: flood + stitch GND under/around module; no signals under RF.
 Center pad -> many GND vias.
 +3V3_RF: RF output (50 ohm TX -1.3 A) At each E22: 100nF closest
 to VCC (pin 9), then 10uF, then 100uF bulk.
 Keep buck U2 switching node & +3V3_RF away from the ANT traces.
 Separate the two SMAs / antennas for isolation.

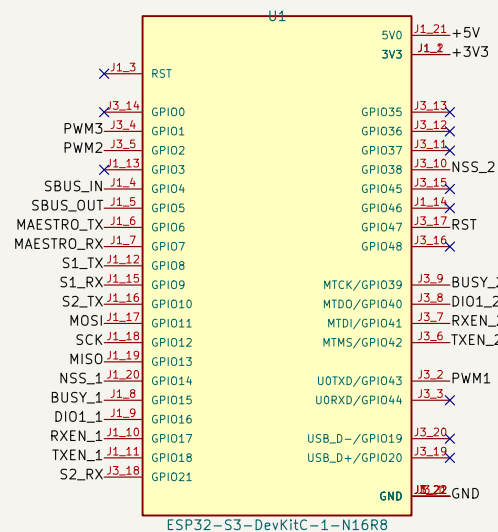

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

Sheet: /	
File: NaviHiltCore.kicad_sch	
Title:	
Size: A4	Date:
KiCad E.D.A. 10.0.4	Rev: Id: 1/1