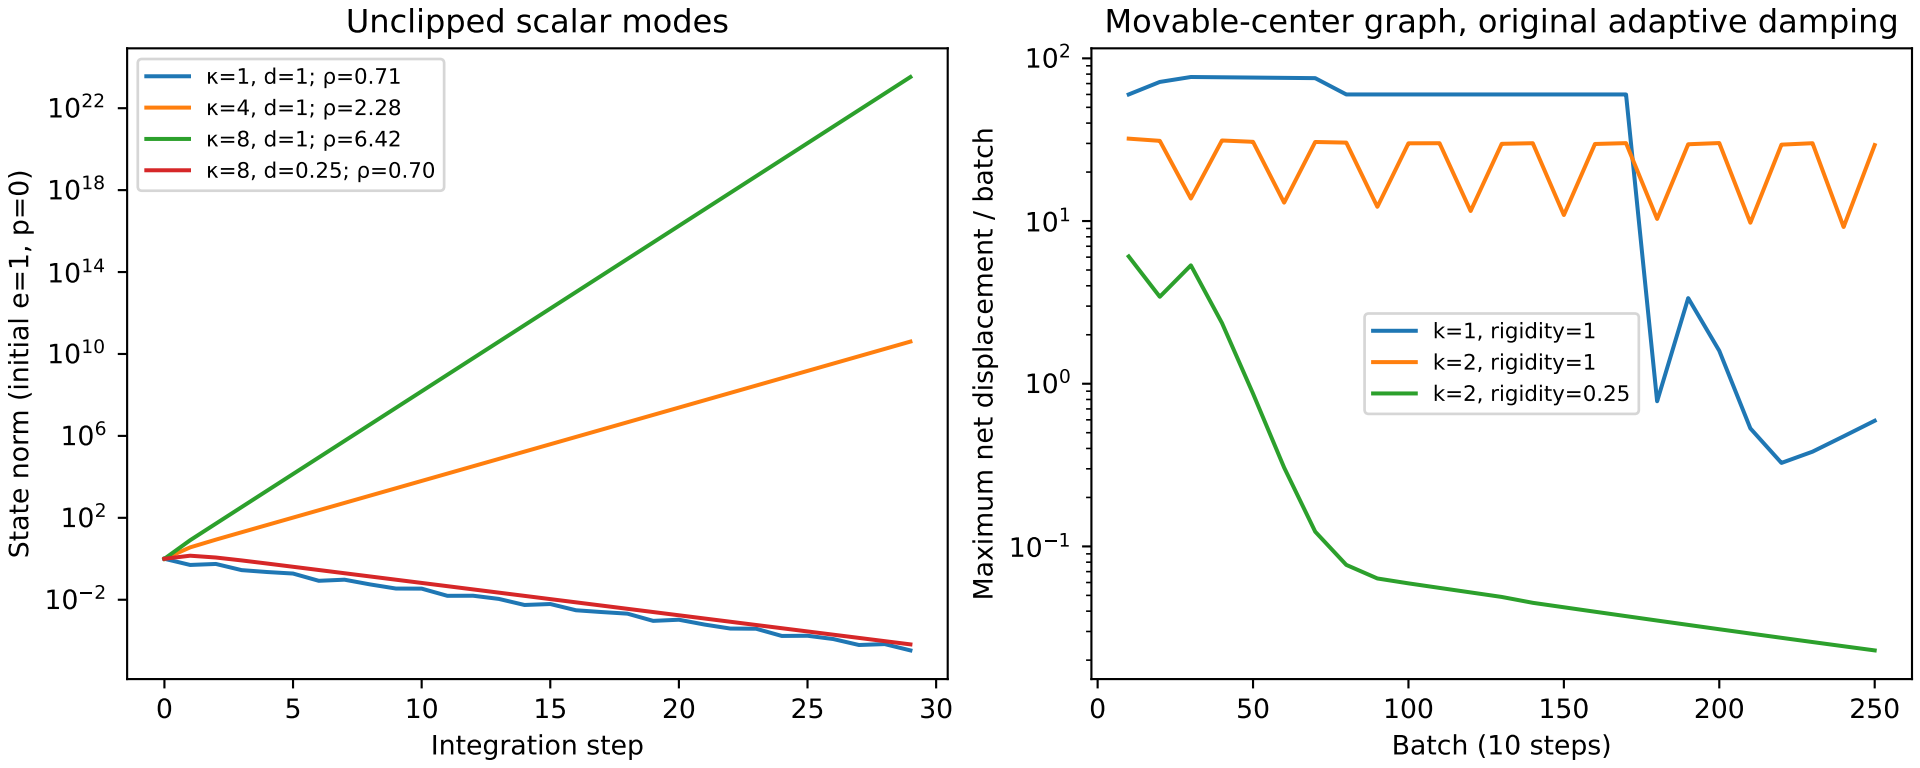
Unclipped scalar modes
κ=1, d=1; ρ=0.71
κ=4, d=1; ρ=2.28
κ=8, d=1; ρ=6.42
κ=8, d=0.25; ρ=0.70
State norm (initial e=1, p=0)
Integration step
Movable-center graph, original adaptive damping
k=1, rigidity=1
k=2, rigidity=1
k=2, rigidity=0.25
Maximum net displacement / batch
Batch (10 steps)