L272

Dual Power Operational Amplifier

Features

- Output Current upto 0.7A
- Operates at Low Voltage ($V_{S(MIN)}$=4V)
- Low Saturation Voltage (Ip=0.5A, V_O=1.5V)
- Thermal Shutdown (TSD=160°C)
- Ground Compatible Inputs
- Large Common mode & Differential mode Range

Applications

- Servo Amplifier
- Power Supply
- Compact Disc
- VCR
- Monitor

Description

The L272 is a high-power dual operational amplifier provided as a 8-DIP and 16-SOP package. The operational amplifier is designed for low impedance loads and will deliver output current upto 0.7A. The L272 can be used in a wide range of applications including power supply, VCR, monitor, servo amplifier, compact disc, etc

8-DIP

16-SOP

Internal Block Diagram

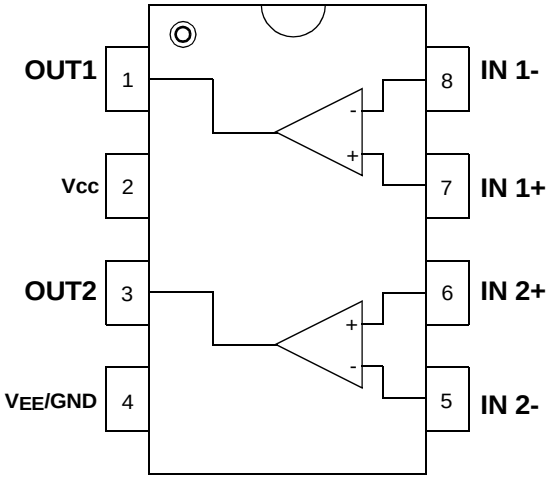

(8-DIP)

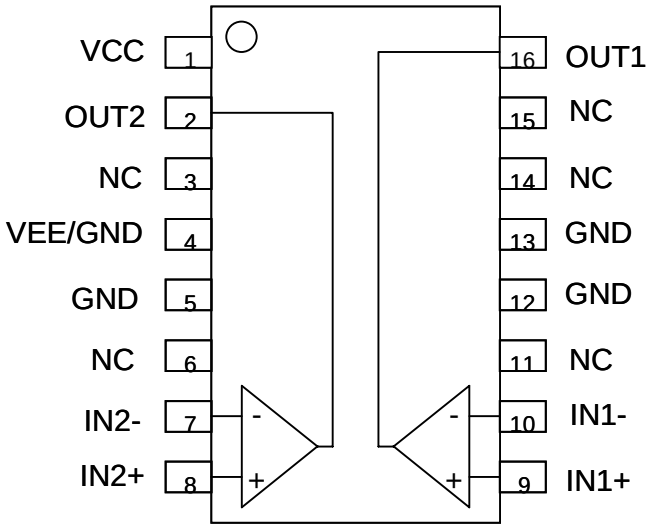

(16-SOP)

Rev. 1.0.2

PIN Definitions

Pin Number		Pin Name	Pin Function Descrition
8-DIP	16-SOP		
1	16	OUTPUT1	Amp Output 1
2	1	VCC	Positive Supply Voltage
3	2	OUTPUT2	Amp Output 2
4	4/5/12/13	VEE/GND	Negative Supply Voltage (GND)
5	7	INPUT-2	Amp Negative Input 2
6	8	INPUT+2	Amp Positive Input 2
7	9	INPUT+1	Amp Positive Input 1
8	10	INPUT-1	Amp Negative Input 1

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	40	V
Input Voltage	V_I	V_S	V
Differential Input Voltage	$V_{I(DIFF)}$	$\pm V_S$	V
DC Output Current	I_O	0.7	A
Peak Output Current (non repetitive)	I_P	1	A
Power dissipation at: T_{amb}=50°C	P_{tot}	1	W
Operating Temperature Range	T_{op}	-25 to 85	°C
Storage and Junction Temperature	T_{stg}, T_j	-40 to 150	°C

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Ambient Max. 8-DIP 16-SOP	Rθja	 100 190	°C/W

Electrical Characteristics

(Vcc = +12V, V_{EE} = -12V, Ta = 25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage (V_{CC} - V_{EE})	V_S		4	-	28	V
Supply Current	I_S	$V_O = V_{CC}/2$ V_{CC}=24V, V_{EE}=0V V_{CC}=12V, V_{EE}=0V	-	 8 7.5	 12 11	 mA mA
Input Bias Current	I_{BIAS}	-	-	0.3	2.5	µA
Input Offset Voltage	V_{IO}	-	-	15	60	mV
Input Offset Current	I_{IO}	-	-	50	250	nA
Slew Rate	SR	Vin = 1Vpp, Unit Gain	-	1	-	V/µs
Gain-Bandwidth Product	GBW	-	-	350	-	KHz
Input Resistance	R_I	-	500	-	-	KΩ
Lange Signal	G_V	$V_{O(pp)}$ = ±10V	65	75	-	dB
Input Noise Voltage	e_N	B = 20KHz	-	10	-	µV
Input Noise Current	I_N	B = 20KHz	-	200	-	pA
Common Mode Rejection Ratio	CMRR	-	60	75	-	dB
Supply Voltage Rejection Ratio	PSRR	V_{CC} =+15V, V_{EE} = -15V V_{CC} =+5V, V_{EE} = -5V	54	62	-	dB
Output Voltage Swing	V_O	V_{CC} = 24V, V_{EE} = 0V Ip = 0.1A Ip = 0.5A	 21 21	 23 22.5	 - -	 V V
Channel Separation	C_S	f = 1kHz; R_L = 10Ω, G_V = 30dB	-	60	-	dB
Total Harmonic Distortion	THD	f = 1kHz, G_V = 1dB,R_L = ∞	-	0.5	-	%
Thermal stutdown Temperature (Note1)	TSD	-	-	160	-	°C

Note :

1. Guaranteed by design. Not 100% tested in production.

Typical Perfomance Characteristics

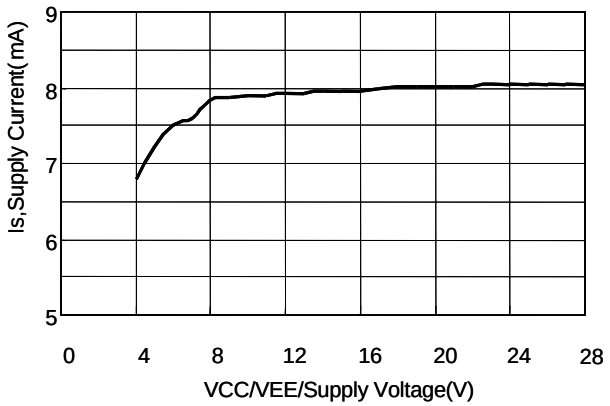

Figure 1. Supply Voltage vs Supply Current with No Load

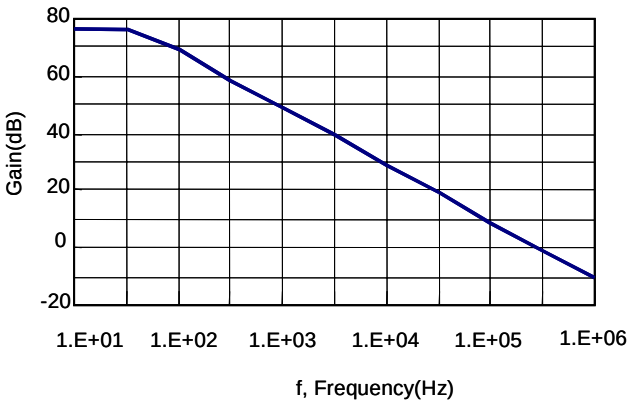

Figure 2. Open Loop Voltage Gain

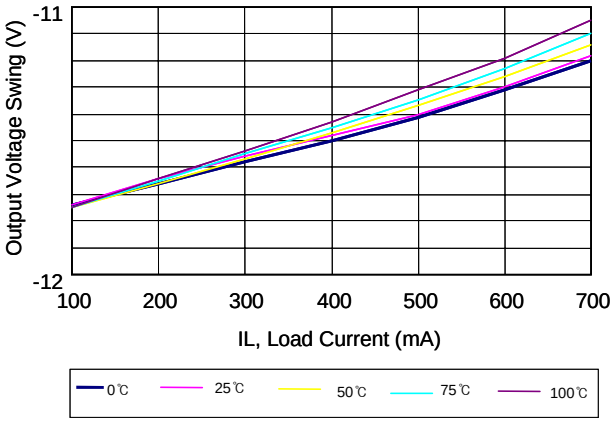

Figure 3-1. Output Voltage Swing vs Load Current

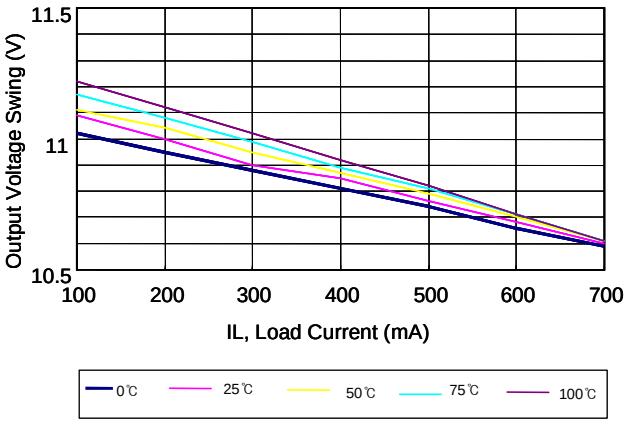

Figure 3-2. Output Voltage Swing vs Load Current

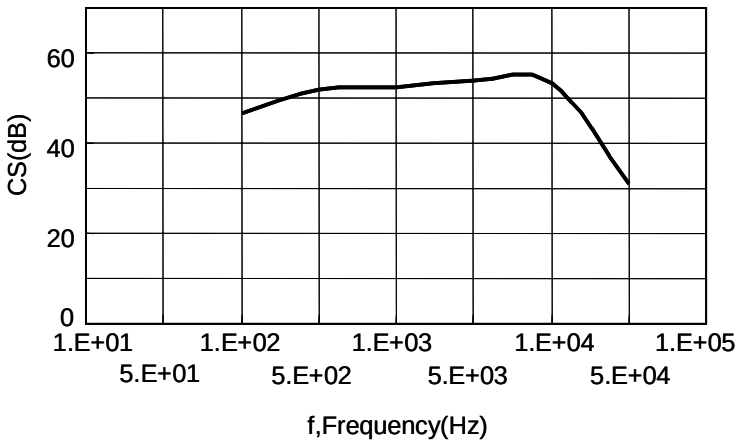

Figure 6. Channel Separation vs Frepuency

Applications

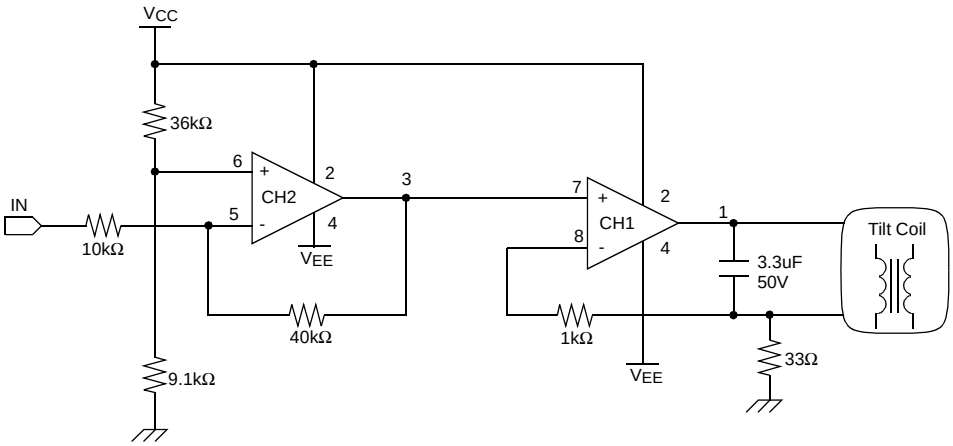

< Tilt Coil Current Control Circuit in Monitor, 8-DIP Package>

Mechanical Dimensions

Package

Dimensions in millimeters

8-DIP

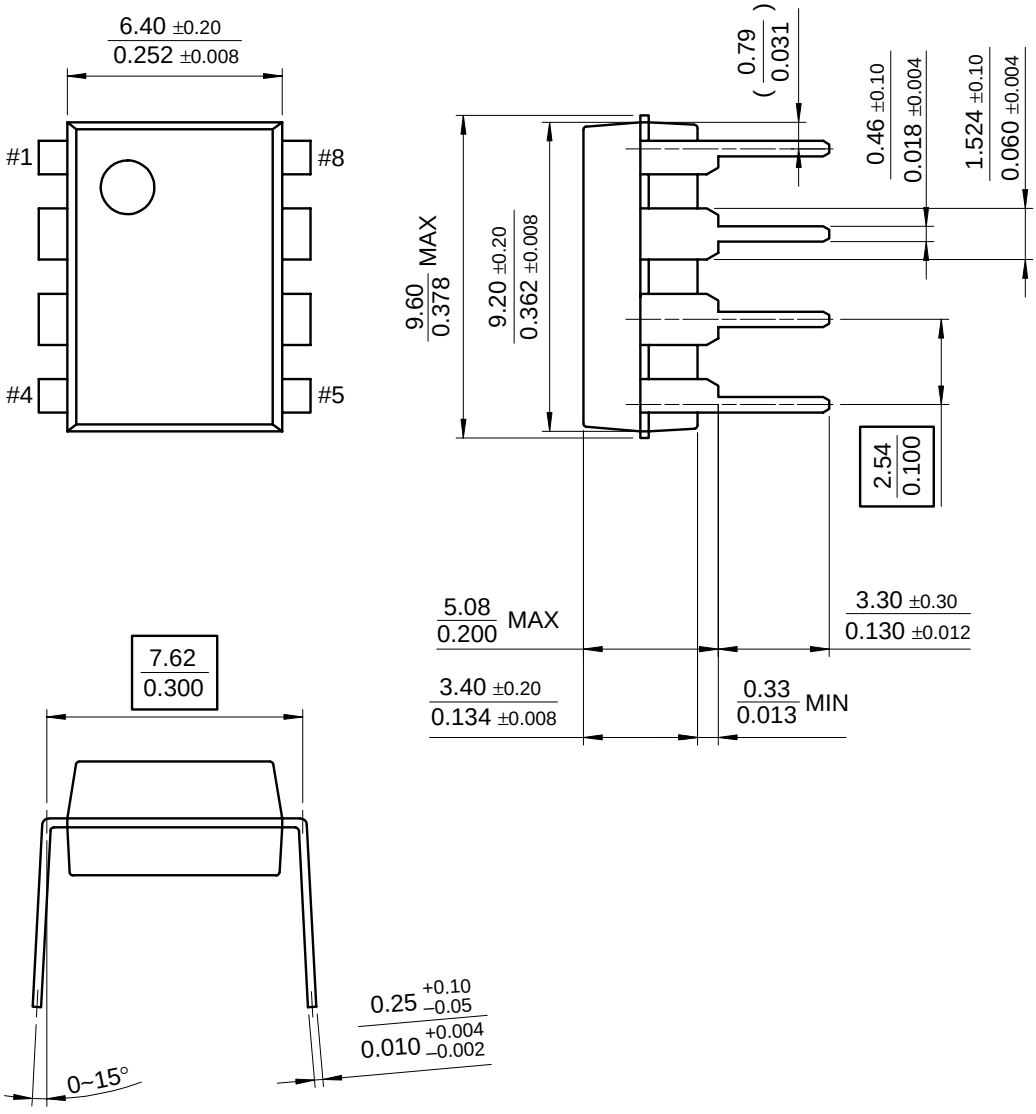

Mechanical Dimensions

Package

Dimensions in millimeters

16-SOP

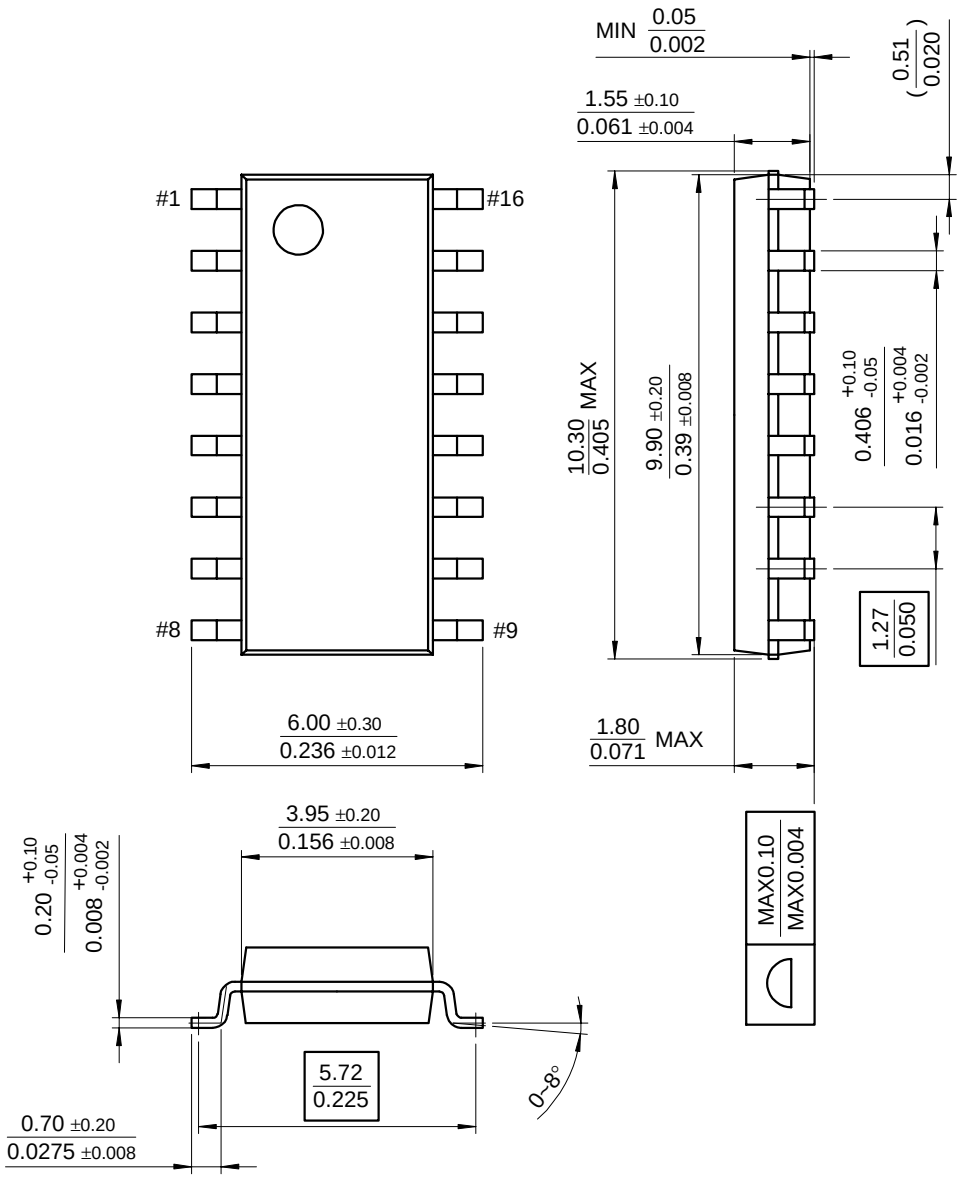

Ordering Information

Product Number	Package	Operating Temperature
L272M	8-DIP	-25°C ~ +85°C
L272D2	16-SOP	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

6/21/01 0.0m 001
Stock#DSxxxxxxxx