# Robotic platform for agriculture System Specifications

Guy Corbaz < guy@corbaz.org>

Robotic platform for agriculture: System Specifications by Guy Corbaz					

# **Dedication**

To the planet

### **Table of Contents**

Pr	reface	vi
1.	Introduction	. 1
	Objectifs du robot tondeuse	. 1
2.	Specifications	2
	General specifications	. 2
	Detailed specifications	3
	Resistance to advancement	3
	Wheel diameter	5
	Propulsion torque	. 6
	Propulsion power	. 6
	Power for accessories	6
	Battery pack	. 6
3.	Architecture	. 8
	Mechanical design	. 8
	Chassis	. 8
	Bodywork	. 8
	Propulsion	. 8
	Electronic	8
	Propulsion engine controller	. 9
	Accessories engine controller	10
	Lidar	10
	GPS	10
	Local contacts	10
	Battery	
	On-board computer	
	Attitude sensors	
	Communication	10
	Software architecture	10
4.	Prototype	11
	Hypothèses à valider	11
	Tests et mesures à effectuer	11
5.	Electronic	13
	Motor control	13
6.	Software	14
	Security	
G	lossaire	
	Bibliography	
	Index	

# List of Figures

2.1. Forces on a wheel	3
2.2. Total resistance	4
3.1. Robot control architecture	C

### **List of Tables**

2.1.	Characteristics of propulsion engines	6
22	Battery canacity	6

# **List of Equations**

2.1. Rolling resistance	4
2.2. Gravitational force	
2.3. Rolling resistance	4
2.4. Gravity resistance	
2.5. Gravitational force	
2.6. Total resistance	5
2.7. Maximum resistance	5
2.8. Speed as a function of rotation speed	5
2.9. Rotational speed as a function of speed	5
2.10. Maximum torque per motor	
2.11 Required power	

# **Preface**

We want to accelerate the transition to sustainable development, that's why we develop an open source agriculture robotic platform. We distribute all the plans license and software of our robot under Apache 2.0, except for ready-made items such as motors, GPS modules, LIDAR , etc. which are under the manufacturer's license.

# **Chapter 1. Introduction**

We very often talk about precision farming and agricultural automation. However, most of these projects consist in improving the traditional way of doing things, without radically changing it. As an example, grass management in crops such as vines, fruit trees, or plot ends is done in a very traditional way: with a tractor and mower or gyro mower, and with weed killers for areas that are not or not easily accessible by machines. The same problem can be found in the maintenance of roadsides or large non-agricultural grassy areas.

### Objectifs du robot tondeuse

Ce robot tondeuse s'inscrit dans une logique de développement durable. Les objectifs sont:

- Supprimer l'utilisation d'herbicides polluants et dangereux pour la santé et la nature.
- Diminuer les émission de CO2 en n'utilisant pas de carburant fossiles et non renouvelables.
- Diminuer les coûts d'exploitations.

Afin de pouvoir rapidement s'insérer dans une logique de développement durable, les plans et logiciels du robot sont distribuées sous licence GNU General Public License (GPL), saus les éléments que nous achetons tout faits, tels que les moteurs, LIDAR, circuits électroniques, etc. qui sont sous la license du fabriquant<sup>1</sup>.

Le robot pourra également être vendu complètement assemblé, ou sous forme de kit soit complet soit partiel. Le kit partiel comprenant, par exemple, des éléments usinées spécifiquement pour le robot.

Tous les plans et logiciels sont librement disponibles sur Internet.

<sup>&</sup>lt;sup>1</sup>Ces éléments peuvent être sous license propriétaire.

# **Chapter 2. Specifications**

This chapter describes the general and detailed specifications of the robot lawnmower.

### **General specifications**

General specifications are the following:

- Weight: 25 kg (±20%)
- Working width: 60cm
- Maximum working speed: 1,8 km/h, that is 0.5 m/s.
- Travel speed: 1,8 km/h
- Minimum treatable area: 20'000 m<sup>2</sup>
- Delimitation of the surface to be treated by GPS RTK (Real Time Kinematic). Installation of a wire is excluded.
- Ground clearance (chassis to ground distance): min 10cm
- Autonomy: 4h minimum.
- Autonomous navigation and obstacle avoidance.
- Trajectory optimization strategy to save battery power.
- Minimum passable obstacle height: 10cm.
  - Maximum crossable slope: 45°.
- Safety and protection of users and animals.
  - Users and animals must not be allowed to come into contact with sharp parts (e. g. mower knives).
  - The machine must stop when someone approaches too close.
  - Cutting elements (e.g. mower knives) must stop if the machine tilts too much.
  - The machine must stop completely and go into alarm if it overturns.
  - The machine must stop completely and go into alarm if it is blocked.
- · Security and remote access
  - System must be protected against unauthorized remote access.
  - Only user who need to access the robot will be allowed to access it.
  - Robot ownership must be tracked: if the owner sell his robot to someone else, a mechanism has
    to be put in place to track this transaction. All access right and ownership parameters have to be
    transmitted to the new owner.
- · Remote access
  - Robot activation/deactivation.
  - Status information.

- Position information.
- Programming the operating area.
- Access via an application on a mobile phone.
- Access via a website.
- · Recharging
  - Two types of charging stations
    - Charging station connected to the electricity grid.
    - Recharging station with solar panels and wind turbine (next step).
  - Recharge time with network connection: max 4h
  - Recharging time with solar or wind stations: max 6h
  - The robot automatically and alone returns to its charging station.
  - When the robot is connected to its charging station, it stops all unnecessary electrical consumers.

### **Detailed specifications**

### Resistance to advancement

The resistance to advancement depends on two factors:


- · Wheel forward resistance
- The slope to be crossed

The calculations below give an order of magnitude of the forces, torques and powers at play. However, these values will have to be checked and confirmed on the prototypes, as they are based on worse case.

### Wheel resistance to driving

According to [wiki01], rolling resistance calculations can be simplified if the vehicle does not move fast, which is our case. Not having found the rolling resistance coefficient for a tire on grass, we take the sand coefficient, 0.3.

Figure 2.1. Forces on a wheel



The rolling resistance is given by:

### **Equation 2.1. Rolling resistance**

$$F_{rr} = C_{rr} \cdot F_g$$

#### **Equation 2.2. Gravitational force**

$$F_g = m \cdot g$$

where:

 $F_{rr}$ : rolling resistance force in N.

 $C_{rr}$ : rolling resistance coefficient..

m: .mass of the vehicle (the robot for us) in Kg.

g: gravitational constant, in  $m/_{S^2}$ .


With our specifications,  $F_{rr}$  is, for a flat vehicle, with all wheels identical. and that the weight is evenly distributed:

$$F_{rr} = C_{rr} \cdot m \cdot g = 20.9.81.0, 3 = 58, 8N \approx 60N$$

#### **Total resistance**

Taking into account the slope, the calculation is a little more complex: it is necessary to add the components due to gravitation. In addition, the rolling resistance force decreases with increasing slope..

Figure 2.2. Total resistance

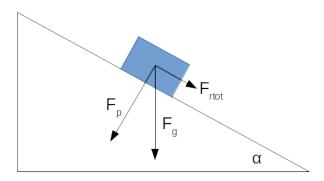

The total resistance is due to the force of gravity and rolling resistance, which is:

$$F_{rtot} = F_{rr} + F_{rg}$$

where

 $F_{rr}$  is the rolling resistance force.

 $F_{rg}$  is the resistance force due to gravitation.

 $F_{rot}$  is the total resistance force: the one that the motors must overcome.

From the diagram Figure 2.2, "Total resistance" and the triangle of forces, we calculate:

#### **Equation 2.3. Rolling resistance**

$$F_{rr} = C_{rr} \cdot F_p = C_{rr} \cdot F_g \cdot \cos(\alpha)$$

It is easy to demonstrate that this force does not depend on the number of wheels but only on the surface of the floor and the wheels.

#### **Equation 2.4. Gravity resistance**

$$F_{rg} = F_g \cdot \sin(\alpha)$$

### **Equation 2.5. Gravitational force**

$$F_g = m \cdot g$$

by replacing the terms, you get:

#### **Equation 2.6. Total resistance**

$$F_{rtot} = C_{rr} \cdot F_g \cdot \cos(\alpha) + F_g \sin(\alpha) = F_g \left( C_{rr} \cdot \cos(\alpha) + \sin(\alpha) \right) = m \cdot g \cdot \left( C_{rr} \cdot \cos(\alpha) + \sin(\alpha) \right)$$

From the general specifications, the total resistance force in the grass is easily calculated for a maximum slope of 45°.

#### **Equation 2.7. Maximum resistance**

$$F_{rtot} = 20.9, 91.(0, 3.0, 7+0, 7) = 177, 5N \approx 180N$$



The values calculated above correspond to the maximum forces with which the robot could be confronted.

### Wheel diameter

The diameter of the wheels is determined by the ground clearance of the robot mower chassis. Wheels with a diameter of 30cm are chosen: this ensures the minimum ground clearance required in the general specifications and leaves some room for the layout of the electric propulsion motors. In addition, wheels with a diameter of 30cm allow the use of inflated tires (at low pressure) which makes it easier to travel on slightly uneven ground such as in crops.

The relationship between the rotational speed and the wheel radius is given by:

#### Equation 2.8. Speed as a function of rotation speed

 $V = 2 \cdot \pi \cdot r.\omega$ 

where:

V: speed in m/s

r: wheel radius in m

ω: rotational speed in rad/s

The rotational speed can be calculated from the linear speed as follows:

#### Equation 2.9. Rotational speed as a function of speed

$$\omega = \frac{V}{r}$$

or, in our case:

$$\omega = \frac{0, 5}{0, 15} = 3,33rd/_S = 1,05t/_S = 63t/_{min}$$

### **Propulsion torque**

The torque required depends directly on the diameter of the wheels and the maximum resistance force. Power, on the other hand, depends on the torque and rotational speed of the wheels, or on the forward speed and resistance force.

The total force required for the movement is 180N. However, it is evenly distributed over all 4-wheel drive. It is therefore 45N per wheel

#### Equation 2.10. Maximum torque per motor

$$T = F_{rr} \cdot r = 45 \cdot 0, 15 = 6,75Nm$$

This represents the total torque. For 4 motors, the torque per motor is a maximum of **6.75Nm**.

### **Propulsion power**

The power required to propel the mower, according to the basic specifications, is:

#### **Equation 2.11. Required power**

$$P = F_{rtot} \cdot V = 180 \cdot 0.5 = 90W$$

With 4 propulsion engines, each engine must have a power of 22.5W≅25W per engine.<sup>2</sup>

**Table 2.1. Characteristics of propulsion engines** 

	Value	Comment
Power	25W	
Torque	6,75Nm	
Rotational speed	60t/min	avec réducteur
Power supply	12 ou 24 V	

### Power for accessories

We reserve 180W of power for connecting accessories, such as cutter bar, arm, etc. to the robot.

### **Battery pack**

To estimate the battery capacity, we start from the robot's autonomy, 4 hours, and the total electrical power required, namely the power of the accessories and the propulsion power.

• Autonomy: 4h

• Total power: 90W + 180W = 270W

12V or 24V batteries are possible. The necessary capacities are:

Table 2.2. Battery capacity

Nominal voltage	Power	Current	Capacity
12V	270W	22.5A	90Ah
24V	270W	11.25A	45Ah

<sup>&</sup>lt;sup>2</sup>with the assumption that the motors and their controls have an efficiency close to 100%.

### Warning

In the above estimates, we did not take into account the efficiency of motors, electronic circuits, etc. However, we have calculated the necessary capacity using the maximum continuous power, which will not always be the case.

# **Chapter 3. Architecture**

The mower robot consists of various mechanical, electronic and software components. The following paragraphs provide details of each element.

### Mechanical design

To be done

### **Chassis**

To be done

#### Wheels

To be done

### **Bodywork**

A faire

### **Propulsion**

Propulsion is provided by four electric motors of at least 25W each (see the section called "Propulsion power" and the section called "Propulsion torque"). The characteristics of these engines are:

• Power: 22,5W

• Torque: 6,75 Nm

• Rotational speed: 33 t/min

In addition, the motor will include an encoder, to measure the number of revolutions performed, as well as a gearbox..

### **Engine**

Brushless engine with encodeur.

#### **Gearbox**

To be done

#### **Encodeur**

The encoder allows you to count the number of revolutions actually performed by the motor. By knowing the reduction ratio of the gearbox and the diameter of the wheels, we can quickly determine the distance covered.

### **Electronic**

The control electronics are made up of several separate blocks, as shown in the diagram below.

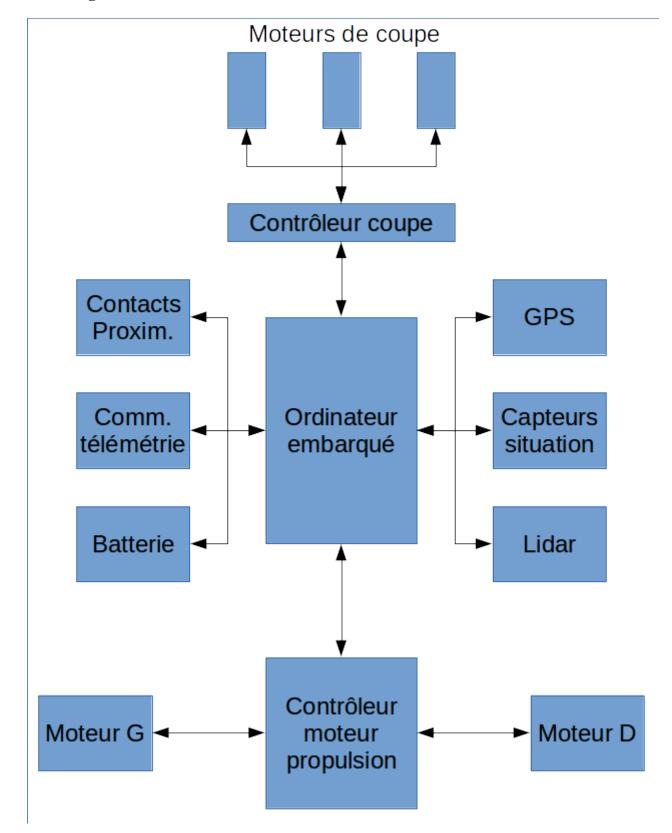


Figure 3.1. Robot control architecture

### **Propulsion engine controller**

To be done

### Accessories engine controller

To be done

### Lidar

To be done

### **GPS**

To be done

### **Local contacts**

To be done

### **Battery**

To be done

### **On-board computer**

To be done

### **Attitude sensors**

Accelerometer, gyroscope, magnetometer

### Communication

WiFi, GSM, IP

### Software architecture


The robot software runs on a Raspberri Pi III. It consists of the following two important bricks::

- Operating system: Linux Ubuntu.
- ROS (Robot Operating System).

# **Chapter 4. Prototype**

Ce chapitre concerne la réalisation du prototype. Il décrit les hypothèses à valider ainsi que les tests et mesures à effectuer.

## Hypothèses à valider

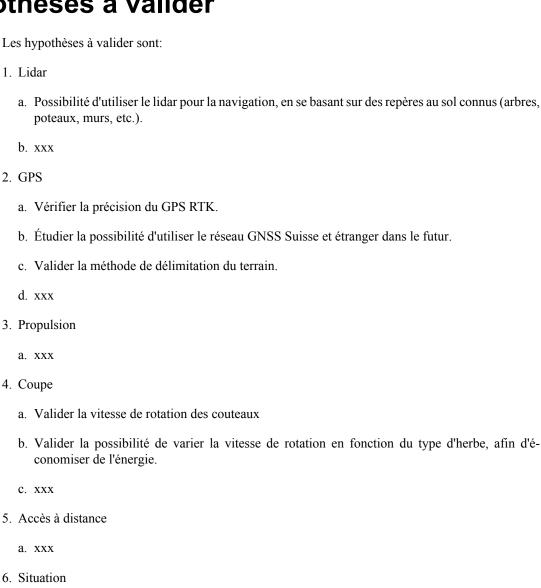

### Tests et mesures à effectuer

Les tests et mesures à effectuer sont:

1. Lidar

a. xxx

- a. Mesurer la précision du LIDAR
- b. xxx
- c. xxx

- d. xxx
- e. xxx
- 2. GPS
  - a. Mesurer la précision du GPS
  - b. xxx
- 3. Propulsion
  - a. Mesurer la courbe de puissance en fonction de l'utilisation
  - b. xxx
- 4. Coupe
  - a. Mesurer la puissance consommée par les moteurs en cours d'utilisation
  - b. Tester la qualité de coupe à différentes vitesses de rotation.
  - c. xxx
- 5. Accès à distance
  - a. xxx
- 6. Situation
  - a. Tester les accéléromètres
  - b. Tester les magnétomètres, principalement leurs interactions avec les moteurs.
  - c. Tester les gyroscopes
  - d. xxx

# **Chapter 5. Electronic**

### **Motor control**

Brush-less motor are controlled via a CANOpen brush-less controller. We are using the KYDBL 2430-1E manufactured by Keya Electron.

# **Chapter 6. Software**

# **Security**

Security is a critical feature that must be implemented in the robot, as it will be connected to the Internet to be remotely accessible, for software upgrade, remote maintenance, remote operations, etc.

# **Glossaire**

GPS RTK La Cinématique temps réel (Real Time Kinematic, en anglais ou RTK) est une

technique de positionnement par satellite basée sur l'utilisation de mesures de la phase des ondes porteuses des signaux émis par les systèmes GPS, GLON-ASS ou Galileo. Une station de référence fournit des corrections en temps réel permettant d'atteindre une précision de l'ordre du centimètre. Dans le cas particulier du GPS, le système est alors appelé Carrier-Phase Enhancement

ou CPGPS.

SLAM Simultaneous Localization And Mapping, signifie localisation et cartographie

simultanées.

GPL GNU General Public License

# **Chapter 7. Bibliography**

# **Bibliographie**

[wiki01] Résistance au roulement. Wikipedia.

[ROS01] Robot Operatinf System. ROS.

[Joseph2017] ROS Robotics Projects. Build a variety of awesome robots that can see, sense, move, and do a lot more using the powerful Robot Operating System. Packt Publishing Ltd.. Joseph Lentin. 978-1-78355-471-3. Copyright © 2017.

[Carol2016] *ROS Robotics By Example*. Bring life to your robot using ROS robotic application. Packt Publishing Ltd.. Carol Fairchild and Dr.. Thomas L. Harman. 978-1-78217-519-3. Copyright © 2016.

[ben2016] VESC - Open Source ESC.

# **Chapter 8. Index**

# Index

#### Α

A valider, 11
Accessories
Power, 6
Architecture
Électronique, 8
Software, 10
Autonomy
Specification, 2

#### В

Battery capacity, 6 Battery pack, 6 Battery< Capacity, 6

#### C

Carrosserie, 8 Chassis, 8 Crossing height Specification, 2

#### E

Electronic, 13 Encodeur Propulsion, 8 Engine Propulsion, 8

#### G

Gearbox Propulsion, 8 Ground clearance Specification, 2

#### М

Mechanical design, 8 Motor Control, 13

#### N

Navigation Specification, 2

#### D

Propulsion, 8 Power, 6 Torque, 6

#### Prototype, 11

#### R

Recharge time
Specification, 3
Recharging
Specification, 3
Remote access
Specification, 2
Resistance to advancement, 3
Total, 4
Wheel, 3
Roues, 8

#### S

Security, 14
Specification, 2
Software, 14
Specifications, 2
Detailed, 3
General, 2
Surface boundary
Specification, 2

#### T

Travel speed Specification, 2 Treatable area Specification, 2

### W

Weight
Specifications, 2
Wheel diameter, 5
Working speed
Specification, 2
Working width
Specifications, 2