

ADVANCED WATER HEATER INITIATIVE · CONNECTIVITY WORKING GROUP

Water heaters: time to move on from CTA-2045

This was the right design for 2013. The world it was designed for no longer exists.

Thirteen years, four jurisdictions, and one number no rule ever required anyone to collect.

DC Jackson · [grid-coordination.energy](#)

THE GOAL

Why coordinate water heaters with the grid?

What. Give high-load appliances the ability to shift when they consume, and to back off when the grid needs them to. **An electric storage water heater is the cheapest thermal battery in the house**, and the best candidate there is: it already stores energy, and nobody notices when it heats.

Cost. Deliver that flexibility affordably, and put the cost where it will actually get paid. Every approach puts it somewhere: on the manufacturer as unit and development cost, on the utility as program cost, or on the customer as money and effort. **The question is never whether there is a cost. It is who pays it, and whether they notice.**

Control. Let the flexibility be managed from wherever produces the most benefit: by the utility or load-serving entity, by a demand response provider, **or by the customer's own energy management system.** The appliance may ship pre-configured for any of the three. **The customer must be able to change which one manages it, and from where.**

THE 2013 DESIGN

The problem was real, and the 2013 design fit it

The problem was real and it still is. An electric storage water heater is the cheapest thermal battery in the house. Getting it to shift is worth doing, and in 2013 essentially nothing in a house could receive an outside signal at all.


The engineering answer was correct for 2013. A water heater lasts twelve to fifteen years. Home networking did not stay still for twelve to fifteen years. Putting the radio in a replaceable module, and standardizing the socket between the module and the appliance, is the textbook answer to a component whose lifetime is shorter than its host's.

Ex ante, this seemed like a good solution. The problem is not in the **standard**. It is in the **rule** that names it, and in what happened above the socket.

Thirteen years have passed. Let's assess how it has worked, and whether to change course.

SO WE ARE USING THE SAME WORDS

A socket in the appliance, and a module the customer chooses

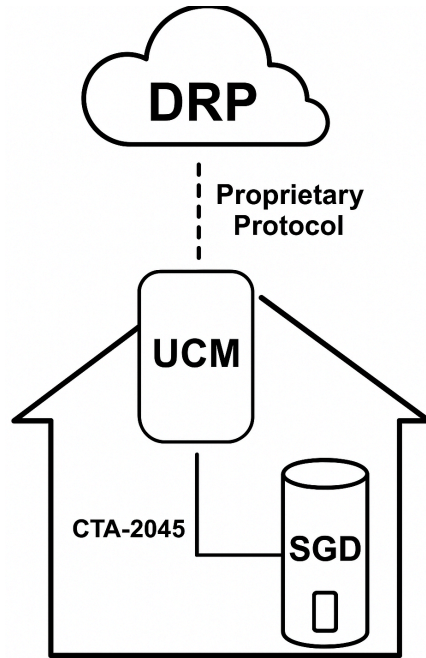

The appliance carries the socket. The module carries the radio. **The link at the top is whatever the module vendor chose.**

SGD, the appliance. The CTA-2045 socket and the microcontroller behind it. The appliance's behavior in response to a signal is deliberately not specified: the committee left that to the manufacturer on purpose.

UCM, the module. The other half of the socket, a network interface (Wi-Fi, cellular or Ethernet), a microcontroller of its own, and a link upstream to a demand response provider.

The premise, in CTA's own words: "Consumers select an appropriate communications module to plug into their appliances based on the networking system... in their homes."

That premise has two halves. The appliance half is a socket, and it got built. The customer half is a market of modules to select from.

No test method. No listing. A label.

(4) Testing "There is no test method required for this product"

(5) Listing "There is no listing requirement for this product"

(6) Marking Every unit "must have a label or marking indicating compliance with the standard in this section"


The certification behind that label stops in the same place, and correctly so. EcoPort examines the socket interface and nothing above it, because the socket is the whole scope of the standard. The Alliance's own policy and guidance, quoted, are in the appendix.

It is a defect in a rule that relies on it. The mark on the appliance certifies that a module will plug in and exchange messages. It certifies nothing about whether a module was ever bought, or whether anything upstream will ever talk to it. **The rule cannot tell whether anything above the socket exists.**


WHERE THE OPEN PART STOPS TODAY

The socket is open. The decision about who reaches it is not.

WHAT COMPLIANCE USUALLY LOOKS LIKE TODAY

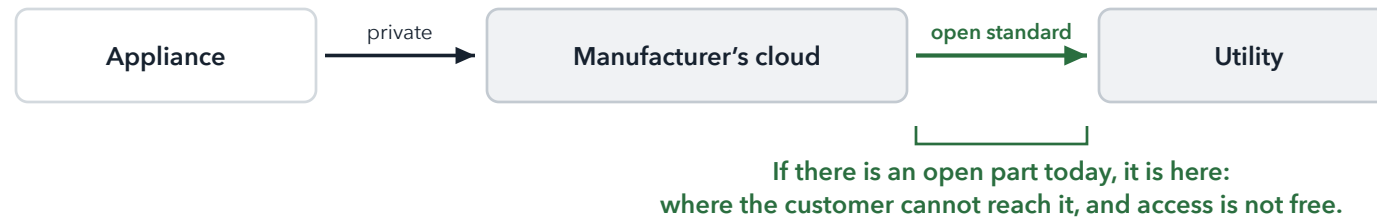

WHAT IT SHOULD LOOK LIKE

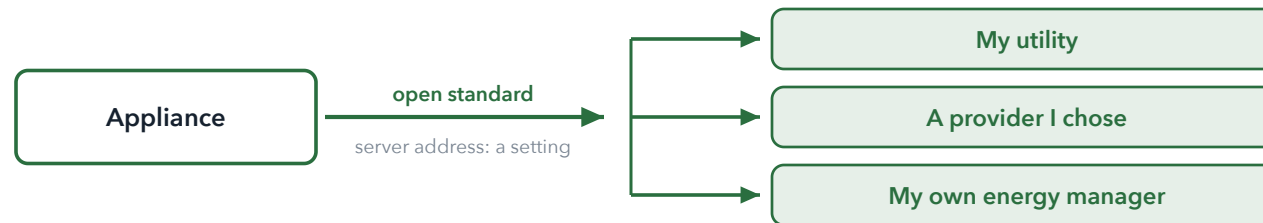

One setting. Three legitimate answers. **The customer picks.**

The price object is in the message set. Nothing standardizes how a real tariff reaches it. Which price arrives, and from whom, is decided by whichever cloud the module vendor runs. **That is outside CTA-2045 by design, and the design is the problem.**

THE GOAL, AND THE DISTANCE FROM IT

Every new water heater should ship able to coordinate

Not a pilot, not a program, not a subset of one state. Every new electric storage water heater sold, the way every one of them already ships able to heat water. That is the only target worth writing a rule for, and it is the target the mandate was written to reach.

None reported	No grid-enabled water heater additions reported in Washington, Oregon or New York, in any year 2020 through 2024, in the federal field that asks
39	CTA-2045 modules deployed in Oregon's largest water heater demand response pilot, against 11,703 retrofit switches
2,000	The unit cap on Washington's largest utility's first water heater demand response product, launched 2025
5 million	US residential electric storage water heaters shipped, per year

No published participation rate exists, at NEEA, BPA, EPRI, PNNL, DOE, either state commission, EIA, AHRI or the Alliance's own product database. These are the numbers that do. Against five million a year, none of them is within sight of the goal. Sources and caveats in the appendix.

WHAT THE RULE REQUIRES, AND WHAT IT LEAVES TO CHANCE

Enabled is not ensured

ENABLED



A port on the tank, and a promise that some other device the customer has not bought yet will do the rest. **Success left to chance.**

ENSURED



An open protocol in the appliance, a network interface, and a server address the owner can change. **The customer plugs it in, and it participates.**

WHAT STANDS BETWEEN THE PORT AND A CONNECTED APPLIANCE


Every connected water heater costs a module and a visit

A module. Bought by the program operator at volume pricing, not by the customer at retail. Assume roughly **\$100**, or **\$150** for cellular. **Every new enrollment costs another one.**

An installation. In the garage, in a closet, behind the furnace.

A network join. Which nobody notices failing later, because nothing else stops working.

A per-unit cost caps program size. Washington's largest utility launched at 2,000 units in 2025, giving the module away and paying \$20 toward the install. A client already in the appliance costs nothing per unit.

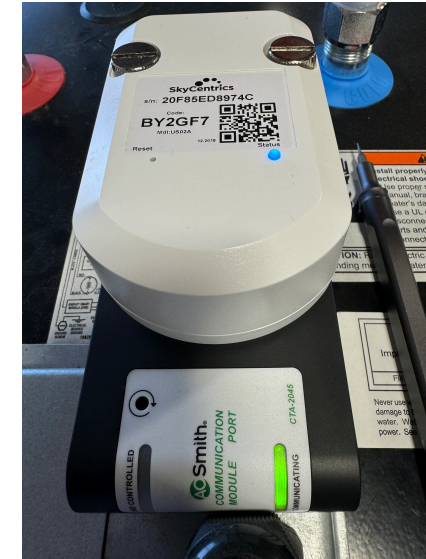

Everything in this photograph is a second computer alongside the first one.

When the gap is too wide to jump



Four jurisdictions required the port. The distance from the port to a connected appliance turned out to be those three steps: a \$209 second computer, an installation, and a network credential typed in a basement. Every one of them had to be crossed voluntarily, by a customer who did not know the port existed.

Nobody designing this in 2013 could have known the jump was that wide. We know now.

The premise is gone, and the cost case inverted with it

The 2013 premise was that an appliance could not be assumed to have a network connection. So put the radio in a replaceable module and standardize the socket.


An appliance can now carry the whole stack, and many already do, on the customer's receipt: a microcontroller, a radio, a TLS stack, a JSON parser and a credential store, because the manufacturer wanted a cloud client of its own.

Rheem's ProTerra page lists both on one model: "Built-in Wi-Fi Powered by EcoNet" and a "built-in EcoPort (CTA-2045 port)." The customer paid for two connections, and exactly one of them is reachable by anyone other than Rheem.

In 2013 a radio in every appliance was the expensive option. On a tank that already ships with Wi-Fi, the module is a second computer doing what the first one already does. Mandating the socket is now the more expensive way to reach the same appliance.

THE DESIGN TARGET

Two interfaces, and a water heater needs both

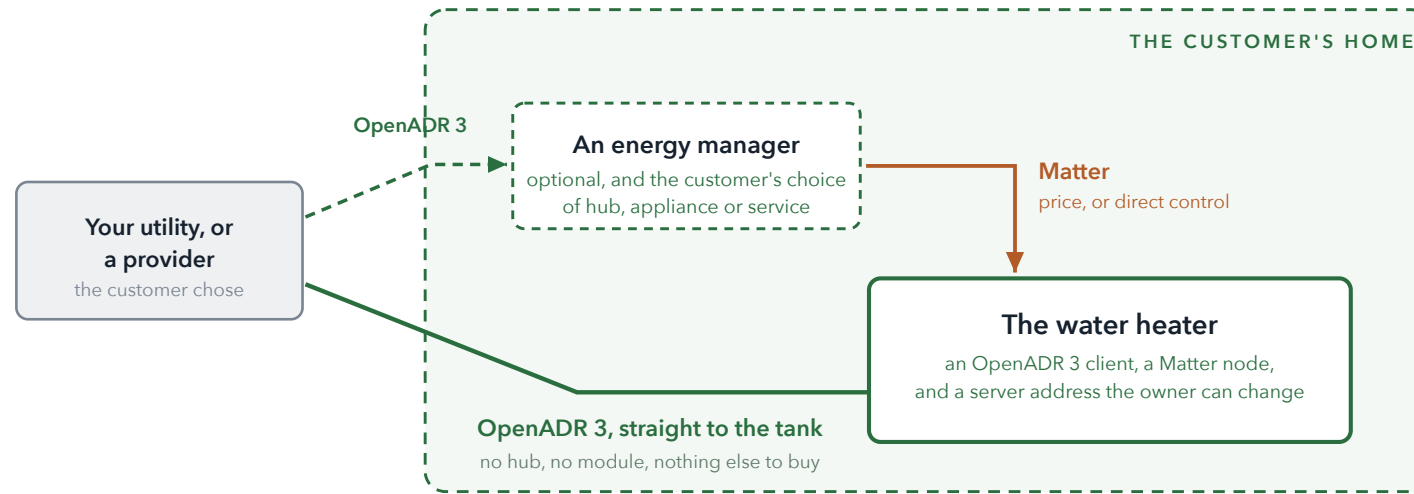

Either path. The appliance does not care which one the house has, and works when it has neither.

Interface A, across the grid boundary

A **price with a forward schedule**, over an open protocol, from a server the customer can point somewhere else.

Interface B, inside the house

If the customer runs an energy manager, it should be able to **drive the tank directly, over the home network**.

The appliance should be able to do either, in the same product, so the customer chooses. Receive the price and decide for itself, or take direction from something in the house that has the price.

INTERFACE A, IN THE APPLIANCE


No new part, no new silicon, and one real cost

Ordinary web technology. HTTPS over TLS, JSON, OAuth 2 client credentials. **Explicitly not PKI.**

The whole client is a token fetch and two authenticated GETs, and against a public tariff server, **all the tank holds is a URL.**

A price is not a number, it is a schedule: a day ahead in one object.

No incremental hardware cost on an appliance that already has a radio. It reuses the microcontroller, TLS stack, JSON parser and credential store the manufacturer already shipped. Engineering and certification amortize across the production run. Support does not: a client in the appliance is a patch obligation for the life of the product.

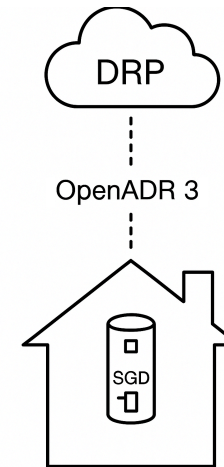

Same appliance, same demand response provider, one fewer party, no part to buy.

INTERFACE B, AND IT TAKES TWO CLUSTER FAMILIES, NOT ONE

Name both, or the energy manager gets half a water heater

Water Heater Management (0x0094) and Water Heater Mode (0x009E). What only a tank has: which heat source is firing, tank volume and percentage, the energy required to reheat, a bounded boost with a duration and a target fill, and the operating modes. **Released in Matter 1.4, November 2024: non-provisional and certifiable today.**

Device Energy Management (0x0098) and DEM Mode. The appliance publishes a **Forecast** and the manager reshapes it: `PowerAdjustRequest`, `StartTimeAdjustRequest`, `ModifyForecastRequest`, `PauseRequest`, `ResumeRequest`. `ESAType` value 2 is `WaterHeating`, alongside EVSE, space heating, battery storage, solar and pool pumps. **One data model types the whole house.**

Neither is sufficient alone. Water Heater Management without DEM gives a manager appliance controls and no way to negotiate a plan against a price. DEM without Water Heater Management gives it energy semantics and no idea what a tank is.

Consent is recorded per adjustment, not delegated to a button. Every DEM adjustment records whether the house or the grid asked for it, so **the customer can refuse grid-driven optimization and keep local optimization**, and that setting has no network write access at all.

And the same gap exists inside the standard I am recommending. The Matter Water Heater device type mandates Water Heater Management, Water Heater Mode and Thermostat. **It does not require DEM at all**, and inside DEM every adjustment feature is optional. A fully certified Matter water heater can ship with no forecast and no shiftability. **Which is exactly why a rule must name the capability, not the protocol.**

TESTABLE LANGUAGE. NO VERSION NUMBERS.

Write the capability, not the standard

WRITE THIS, IN THE RULE	NOT THIS
A price with a forward schedule, over an open protocol, received in the appliance itself	"A modular port compliant with [named standard, named edition]"
A server address the owner can change	"The manufacturer shall provide a demand response interface"
Action on the last schedule with no network	Nothing, which is what these rules say today about outages
Both the water-heater-specific and the generic energy-management semantics	"Shall support [a smart home standard]"
Every line on the left is testable, and none of them names a version, including the protocol I am recommending. The remaining requirements and the full drafting language are in the appendix.	
ENERGY STAR opened this door in April 2023: a connected water heater may meet CTA-2045 or OpenADR 2.0b instead. The version it names is a cloud-to-cloud protocol that was never designed to live in an appliance, so the door was open onto a wall.	

The ask

Retire CTA-2045 as a water heater requirement. Not an additional compliance path. Not a fix to the link above the socket. **Retire it.** The port competes with the better answer for the same dollars and the same engineering attention.

Require instead, of the appliance itself: an open-protocol client that receives a price with a forward schedule; a server address the owner can change; retention and action on the last schedule with no network; **the ability to reach Wi-Fi, Ethernet or cellular at the customer's choice**, delivered as one integrated interface plus a USB-C host port for a class-compliant adapter, not three radios in every unit; and local control covering **both** the water-heater-specific and the generic energy-management semantics.

Write the capability and the test method. Put standards in an appendix. No version numbers in the requirement, including no version number on the protocol I am recommending.

Washington and Oregon do not need new legislation to start. WAC 194-24-180(3) and OAR 330-092-0020(16)(b) already direct the department, **on written request by a manufacturer**, to determine whether an alternative "open and widely available" standard is equivalent, and to publish any it accepts. **Neither department has published a determination. That list is empty.**

BACKUP

Detail

THE TWO OBJECTIONS I TAKE SERIOUSLY

Obsolescence, and the patch obligation

The obsolescence argument still holds, and it is the strongest part of the 2013 case. A water heater lasts twelve to fifteen years and home networking does not stand still for twelve to fifteen years. Putting the radio in a replaceable module is the textbook answer to a component whose lifetime is shorter than its host's.

The answer is that the replaceable part got smaller and cheaper. The USB-C host port is the replaceable radio, at \$4.76 for an adapter instead of a \$100 module, and a configurable server address is the replaceable cloud. **What has to survive fifteen years is a URL and an HTTPS client, not a radio.**

The cost objection I take seriously is not the silicon. It is that a client in the appliance is a fifteen-year patch obligation on a company whose service organization exists to replace anodes.

The answer is that the obligation already exists. The manufacturer accepted it the moment it shipped a cloud-connected model, and a second, open client on the same stack does not double it.

CONNECTIVITY, WHICH IS ITS OWN SUBJECT

A utility measured the radio problem

Garage, basement, utility closet, behind the furnace. Concrete, ductwork, and the far end of the house from the router.

PGE, to the Oregon PUC, on its own water heater DR pilot: "cell-enabled switches have a higher connectivity rate (**79% season average**) than wi-fi connected switches (**50% season average**)... showing constant signal degradation."

PGE stopped retrofitting water heaters with Wi-Fi in October 2019. Those were retrofit switches, not CTA-2045 modules. Same radio, same basement.

An SSID or password change disconnects the module silently, and nobody notices, because nothing else stops working.

The remedy is boring: Ethernet. Water heaters are not mobile. Incentivize a drop at installation and require one near high-amperage outlets in code. **A USB-C Ethernet adapter is \$4.76.**



93% of US households have an Internet subscription. Only 76.5% have fixed broadband (ACS 2024, table B28002). For an appliance joining a home network, 76.5% is the figure that applies. Equity gaps belong in assistance programs, as with electric service.

What a module costs, and what a program pays

LISTING	PRICE	WHAT RECURS
Modbus / Ethernet UCM	\$169	None listed
Wi-Fi UCM	\$209	A platform fee, prepaid for a year at checkout: \$209 list, \$221 in the cart
Cellular UCM	\$249.99	The page states "Price for 1-20 modules is \$249/unit, plus \$36 annual Platform Fee "
A.O. Smith EcoPort communications package	\$349	Cellular

These are small-quantity retail listings. Program operators, not customers, buy these modules, and they buy at volume. The working assumption in this deck is roughly \$100 a unit for Wi-Fi or Ethernet and roughly \$150 for cellular, stated as an assumption because no volume price list is public. The retail figures above are the upper bound. In a program the customer often pays nothing: Puget Sound Energy gives the module away from the PSE Marketplace and adds a \$20 installation incentive. **That is a real answer to the price objection, and it does not remove the cost. It moves it to the program budget, where it competes with every other measure for the same dollars.**

The recurring fee is the part that has no equivalent in firmware. A client in the appliance reuses the radio, the TLS stack and the credential store the customer already paid for, and carries no annual platform fee at all. **These are public store prices, so they are what a homeowner would pay, not what a program pays.**

What the client actually has to implement

Transport and identity. HTTPS over TLS, JSON payloads, OAuth 2 client credentials for the token. **Explicitly not PKI:** provisioning X.509 certificates into consumer devices is "daunting at best, or simply not supportable."

A price-consuming client is a token fetch and two authenticated GETs, /programs and /events , or MQTT push where the appliance sits behind a home router. **A server offering only public tariff information may accept unauthenticated requests, so all the tank holds is a URL.**

A price is not a number, it is a schedule. A start, an ISO 8601 duration, and an ordered list of intervals: a day ahead in one object.

The specification names this appliance. Verbatim: "VENs may be implemented within on-site customer devices such as **a water heater...**"

What the appliance already has, and does not buy twice: the microcontroller, the TLS stack, the JSON parser and the credential store, all shipped the moment the manufacturer added its own cloud client. **The cost that does not amortize is support: a patch obligation for the life of the product.**

Both quotations are verbatim. The appliance is a VEN in OpenADR terms; the demand response provider runs the VTN.

- ****In OpenADR 3 this is already a normative MUST:** "A VEN MUST support end-user configuration of VTN URL, clientID and clientSecret... but MUST support end-user reconfiguration." **Make that existing MUST testable in a rule ****

Six requirements, as rule text

WRITE THIS, IN THE RULE	NOT THIS
The water heater shall receive a price with a forward schedule over an open protocol, implemented in the appliance itself	"Shall have a modular demand response communications port compliant with [named standard, named edition]"
The server address shall be configurable by the owner without the manufacturer's participation	"The manufacturer shall provide a demand response interface"
The appliance shall retain and act on the last received schedule with no network connection	Nothing, which is what every one of these rules currently says about outages
The appliance shall expose both the water-heater-specific and the generic energy-management semantics on the home network	"Shall support [a smart home standard]"
At least one integrated network interface, plus a USB-C host port accepting a class-compliant network adapter	"One or more network interfaces"
A customer may take the signal directly, with no enrollment and no intermediary	"Customers participate through a program administrator"

ENERGY STAR already built the alternative door. Residential Water Heaters Version 5.0, effective April 18, 2023, section 4.D.a: the connected product "shall meet the communication and equipment performance standards for **CTA-2045 or OpenADR 2.0b (Virtual End Node), or both.**" An open-protocol client in the appliance has been an accepted alternative for three years. **The version named is a cloud-to-cloud protocol that was never designed to live in an appliance, so the door was open onto a wall.**

Where the verification stops, in the source text

WAC 194-24-180, verbatim. "(4) Testing. There is no test method required for this product." "(5) Listing. There is no listing requirement for this product." "(6) Marking. Every unit of every electric storage water heater must have a label or marking indicating compliance with the standard in this section."

EcoPort certification stops at the same place. The OpenADR Alliance's certification policy: the program "only examines the socket interface parameters," and "functionality of either the UCM or the SGD beyond the interface is not evaluated."

The Alliance's architecture figure labels the segment above the module "Any Communication System," deliberately and correctly. A rule that stops in the same place inherits that boundary.

The scope is correct, and it was chosen on purpose. The standard's scope is the socket, and that is what a certification can test. The Alliance's Level 2 guidance says the same about behavior: "the water heater behavior is not specified in the standard. This was done by the CTA-2045 committee on purpose."

CTA-2045 does carry a price. The gap is above the module.

What is true: price has been in CTA-2045 since the first edition. Present Relative Price and Next Relative Price, a Set/Get Energy Price message with an absolute price, an ISO currency code, a decimal field, an expiry and a next price. **CTA-2045-B Level 2 requires a day-ahead price schedule: "Prices to Devices - Can accept 64 time/price pairs for 24 hour ahead smart planning."** The committee added time-price pairs for CA Title 24 JA13, then deliberately skipped time-of-use to aim at real-time dynamic pricing. **60 of the 62 certified EcoPort products are Level 2.** This is not a paper feature.

What is missing: the price object exists in the message set, and **there is no standardized way for a real tariff to reach it**, because the link above the module is undefined. The schedule is 64 points over 24 hours, so it is a day-ahead schedule rather than a live price. And which price arrives, and from whom, is decided by whichever cloud the module vendor runs.

The quoted feature list is the OpenADR Alliance's own: **CTA-2045-B Level 2 Guidance for Water Heater OEMs**, section 6, time price pairs. Level 2 count from the EcoPort certified product database, counted August 31, 2026.

THE NEXT EDITION

CTA-2045-C is a live project, not yet a document

The project is real. CTA's R7.8 subcommittee launched CTA-2045-C in January 2025, to "provide improvements to the standard interface for energy management signals and messages to reach devices." CTA-2045.4, an implementation guide, is also active.

Nineteen months on, both are still listed under Active Projects. Nothing is published. Nineteen months is not slow for a standards project. It is normal, and the people doing it are volunteers.

Its announced scope is improvements to the same socket-side interface. It says nothing about the link above the module.

A rule can only be written against a published document. What -C will contain, beyond its published scope statement, is not yet knowable.

CTA standards news, "**CTA Launched Project CTA-2045-C, Modular Communications Interface for Energy Management,**" January 2025. Both CTA-2045-C and CTA-2045.4 still appear under Active Projects on CTA's current projects page, checked August 31, 2026.

It closes the behavior gap, not the reach gap

What it is, stated fairly. AHRI 1430-2022 builds on CTA-2045 rather than replacing it. It adds test procedures, conformance conditions and appliance behavior requirements above the message set. Colorado and New York name it; Rheem's compliance bulletin treats the three as one family, "ANSI/CTA-2045-A, ANSI/CTA-2045-B or AHRI 1430."

It fixes something real, and something CTA-2045 left open on purpose. NEEA: within CTA-2045 "the lack of descriptive SGD behavior in response to messaging was intentional," so two compliant water heaters could answer the same Shed request differently. 1430 constrains that. **It is a genuine improvement and I am not arguing against it.**

It does not change what is on the other side of the socket. A 1430-compliant water heater still has a port and no radio. The customer still buys a module, installs it and joins it to Wi-Fi. **Nothing above the module is standardized by either document.**

So it makes the appliance behave predictably once something is talking to it. It does not make anything talk to it, and it does not let the customer choose who does.

The same is true of any future edition. **Testing behavior below the socket and defining reach above it are different problems**, and only the first one is being worked.

Four jurisdictions, instrument by instrument

JURISDICTION	THE INSTRUMENT	WHAT IT REQUIRES
Washington	RCW 19.260.080; WAC 194-24-180	Sale prohibited without a CTA-2045 port. Statute says on or after Jan 1, 2021; the rule applies from Jan 1, 2023 . Since March 2026 the rule accepts -A or -B
Oregon	OAR 330-092-0015(16) and -0020(16)	Sale prohibited without a CTA-2045-A port, units manufactured on or after July 1, 2023 . HB 2062 said Jan 1, 2022; ODOE postponed twice, and called the second the last one it could grant administratively
Colorado	C.R.S. 6-7.5-105(5)(d) , added by HB23-1161	Sale or lease prohibited on and after Jan 1, 2026 without a port compliant with AHRI 1430 . 40 to 120 gallons, 12 kW or less
New York	2025 ECCCNY R403.5.4 and C404.8	Not a sales rule. A building energy code requirement, enforced at permit , effective Dec 31, 2025 . Units manufactured on or after July 1, 2025 must meet AHRI 1430

Three prohibit the sale. One binds the builder at permit, which is why Rheem's September 2025 compliance bulletin lists Colorado, Oregon and Washington, not New York. **Colorado and New York name AHRI 1430, which is not a move away from CTA-2045.** AHRI 1430-2022 builds on it: the standard's stated purpose is to confirm that equipment communicates "using CTA-2045-B", and it adds the test procedures and appliance behavior requirements that CTA-2045 deliberately left to the manufacturer. Rheem's compliance bulletin treats them as one family: "ANSI/CTA-2045-A, ANSI/CTA-2045-B or AHRI 1430".

Credit where it is due: four jurisdictions did the genuinely hard work of writing an appliance rule and defending it. That is more than most states have managed on any flexible demand question.

THE ECOPORT CERTIFIED PRODUCT DATABASE, COUNTED AUGUST 31, 2026

58 appliances. 4 modules.

62 certified listings. 58 Smart Grid Devices, mostly heat pump water heaters. **4 Universal Communication Modules**, from Steffes, e-Radio and SkyCentrics. 60 of the 62 are certified at CTA-2045-B Level 2.

Certification is voluntary and no mandate requires it, so 62 is a floor, not a census. It is the only public count there is.

The premise was consumer choice: the customer selects a module suited to their home. After thirteen years and four mandates, that is what there is to select from. Three vendors built for a market of four states with no committed volume.

Each module terminates in its own vendor's head end. Steffes into the Steffes head end, e-Radio into e-Radio's cloud, SkyCentrics into SkyCentrics' platform. **Two compliant water heaters with modules from different vendors are not reachable by the same demand response provider.**

PARTICIPATION

The five records, with sources

No published rate exists. Not at NEEA, BPA, EPRI, PNNL, DOE, the Oregon PUC, the Washington UTC, EIA, AHRI, or the Alliance's own product database.

SOURCE	WHAT IT SAYS
Form EIA-861, Schedule 6, line 7	No utility in Washington, Oregon or New York reported adding one , in any year 2020 through 2024. Some entered zero, most left the field blank. PSE reports 601,946 residential DR customers and leaves the field blank; PGE reports 192,617 and leaves it blank. Colorado's entries are essentially all Fort Collins, and not CTA-2045
Portland General Electric, Oregon PUC, April 2022	"the pilot has deployed 11,703 water heater retrofit switches and 39 CTA-2045 enabled new Smart Water Heaters communication devices"
PGE again, June 2023	Closed the pilot to new enrollments and extended it two years, to allow "increasing availability of CTA-2045 enabled water-heaters so PGE can resume installations." PGE paused installations and waited for certified equipment to exist
Puget Sound Energy, 2025 DR Equity Action Plan	Washington's largest utility launched its first water heater DR product in Q2 2025 , at ordinary first-year pilot scale, 2,000 units , the module free from the PSE Marketplace and a \$20 installation incentive
AHRI shipment statistics	About 5 million residential electric storage water heaters shipped in the US in each of 2023, 2024 and 2025

Line 7 is annual additions, not stock, and not CTA-2045 specifically. A floor, not a census.

Five independent sources point one way and none points the other. Against roughly five million units a year, the connected count is not

Every date that matters

2013	ANSI/CEA-2045, published by the Consumer Electronics Association with the Smart Grid Interoperability Panel
March 2018	ANSI/CTA-2045-A. The edition Washington's statute and Oregon's rule name
September 2019	ANSI/CTA-2045-B, ANSI version February 2021. Still the current published edition
January 1, 2021	Washington's statutory date. Commerce is authorized to set a later one, and does
October 26, 2022	The OpenADR Alliance announces the first EcoPort certified products . Twenty-two months after the date Washington's statute named
January 1, 2023	Washington's rule, WAC 194-24-180, actually applies. Commerce delayed it two years, for supply chain
January 2025	CTA-2045-C project launched. Nineteen months later, nothing published

The socket was written into law before there was a way to certify it. Washington's statute named 2021; the first certifications came in October 2022, and Commerce had by then moved the operative date to 2023. The certification program ran about two years behind the Alliance's own published schedule.

Federal: nothing. S.4061 and H.R.7962 would have had DOE decide by December 31, 2024 whether to require demand response capability on electric storage water heaters. Both died in committee. **DOE has never been asked the question.**

WHAT CARRIES OVER WHEN THE SOCKET RETIRES

The semantics are already expressible somewhere else

The other standard's own text says so. OpenADR 3 User Guide, section 8.11: "OpenADR 3 is well suited to be a standard external protocol for CTA-2045B... For many capabilities of CTA-2045, e.g. sending prices, an emergency signal, or reporting energy use, there are existing mechanisms in OpenADR that implement the functionality. For a few capabilities, enumeration values specific to CTA-2045 have been added."

Those enumerations are in the payload registry, `CTA2045_REBOOT` and `CTA2045_SET_OVERRIDE_STATUS`, both pass-through for resources that support CTA-2045-B, and the user guide says a document giving an unambiguous mapping between the two standards is forthcoming. **Retiring the socket delivers the same semantics without the \$209 part.**

The same rule text, as bench tests

A capability nobody can test is a capability nobody will adopt. Appliance rules run on test methods. Each line below is measurable on a bench in an afternoon, with no help from the manufacturer, and every one of them is something Washington's current rule explicitly does not do.

CAPABILITY	WHAT THE LAB MEASURES
Open protocol in the appliance	Point the water heater at a reference server on the bench. It connects and acts, with the manufacturer's cloud unreachable
Customer-configurable server	Change the server address using only the appliance's own interface, with no vendor account and no vendor app. Time it
The price is consumed	Publish a day-ahead price schedule. Observe the heating decision change
Local survival	Deliver a schedule, then cut the WAN. The tank keeps acting on the retained schedule for the full horizon
Network interfaces	Present Ethernet, Wi-Fi and cellular in turn, integrated or over USB-C. Each reaches the configured server
No enrollment	Connect to a reference server with no account creation, no program enrollment and no intermediary. It receives and acts

The clusters, by name and by content

Water Heater Management, 0x0094, revision 2. Read `HeaterTypes` (immersion element 1, immersion element 2, heat pump, boiler, other), `HeatDemand` (which is firing now), `BoostState`, and with the optional EnergyManagement feature `TankVolume`, `EstimatedHeatRequired` in mWh and `TankPercentage`. Commands: `Boost` (duration, one-shot, emergency, temporary setpoint, target percentage, target reheat percentage) and `CancelBoost`. Events: `BoostStarted`, `BoostEnded`.

Water Heater Mode, 0x009E. `SupportedModes` and a read/write `CurrentMode`, from mode tags including Auto, Quick, LowEnergy, Vacation, Off, Manual, Timed. `StartUpMode`, `OnMode` and the OnOff dependency are explicitly disallowed.

A controller can see how hot the tank is, how much energy reheating would take, which element is firing, and can set the mode or call for a bounded boost with a temperature and a target fill.

Matter is local by construction: there is no cloud-mediated Matter, so this is a home-network capability and cannot cross the grid boundary by itself. **Matter 1.5, November 2025, added an electrical energy tariff device type**, so Matter now has somewhere to put a price and still no way to fetch one from the grid. **Something in the house still has to hold the grid connection. That is the whole reason there are two interfaces.**

The clusters are released and the device type is certifiable today. I could not establish that a Matter-certified water heater is shipping. If anyone here has certified one, I would like to know that too.

WHAT THE RADIO COSTS ONCE THE CLIENT IS IN THE APPLIANCE

Three interfaces, three listings, one port

Amazon Basics Aluminum USB-C to RJ45
Gigabit Ethernet Adapter, Fast Network, Grey,
2.07 x 0.81 x 0.6 inches

\$15¹⁹

4G LTE USB Modem Dongle Router with
WiFi Hotspot, 4G Modem Wireless WiFi
Hotspot Router with SIM Card Slot
Unlocked Portable for AT&T/T-Mobile in
USA/CA/MX

\$39⁹⁹

USB WiFi Adapter, Plug-n-Play, Built-in high-
gain Antenna, USB Adapter for PC
Desktop/Laptop, Wireless Network Adapter
Supports Windows 11/10/8/7

\$11⁹⁹

Left to right: a USB-C to Gigabit Ethernet adapter at **\$15.19**, an unlocked 4G LTE modem with a SIM slot at **\$39.99**, and a USB Wi-Fi adapter at **\$11.99**. All three are class-compliant retail listings and all three plug into the same port. The cheapest Ethernet adapter is **\$4.76**.

The requirement was never a bill of materials. At least one integrated network interface, plus a USB-C host port that accepts a class-compliant adapter, and whoever needs that basement online supplies the adapter. This is not a like-for-like comparison: a module price includes a cloud service, a certification and a support relationship, and a dongle is cheap precisely because the appliance supplies the client. Move the client, and the radio becomes a commodity. For scale, the Wi-Fi module is \$209 and the cellular module \$249 plus a \$36 annual platform fee.

Everything here is public and free

I maintain these. They are open source, and I take no money for any of them.

This deck	grid-coordination.energy/presentations
The price server , with client tutorials	github.com/grid-coordination/price-server-user-guide
Home Assistant integration , in the HACS default repository	github.com/grid-coordination/openadr3-ven-hass
Open-source libraries (Clojure and Python)	github.com/grid-coordination
OpenADR 3	openadr.org
Matter	csa-iot.org
URPX , machine-readable tariffs	lfenergy.org/projects/utility-rate-plan-exchange-urpx

No account, no contract, no enrollment on any of it.