
held-out build

φ = encoder ∘ render

Real above Fill-Interior




Real




Fill-Interior

peach = sealed air

4 exterior views
az 45/135/225/315
el 30, ortho, 224 px
fill survives
0.8/255 per frame

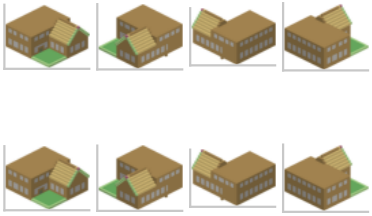

4 cutaway views
four 1-voxel floor slabs

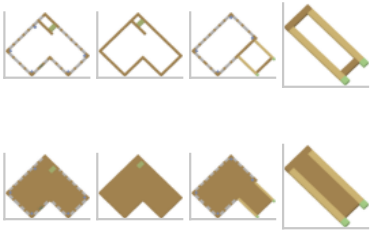

DINOv2-B/14
mean-pool 4 views
L2-norm → 768-d

φ = D4-invariant occupancy descriptor
55 local-pattern orbits + 5 thickness bins
+ 8 height bins + 9 scalars = 77-d

unbiased KID
$k = (a \cdot b/D + 1)^3$

+0.38 noise floors

not separated
KID +0.000
real floor -0.001

bench run, n = 128

+57 noise floors

separated
4 cutaway protocols, +9 to +57

view ablation, n = 256
row 1: +1.1

+202 noise floors

separated
KID +22.03
real floor -0.09

bench run, n = 128