


1

2


3

4


nCS is active low and has an integrated pull-up resistor 70-190kOhm
SDO: Slave address LSB (GND = '0', VDDIO = '1')

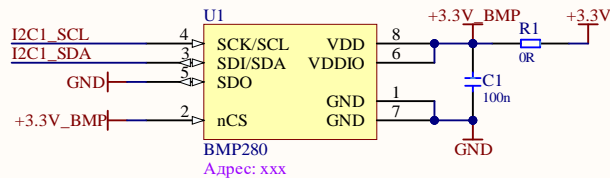

Адрес: xxx

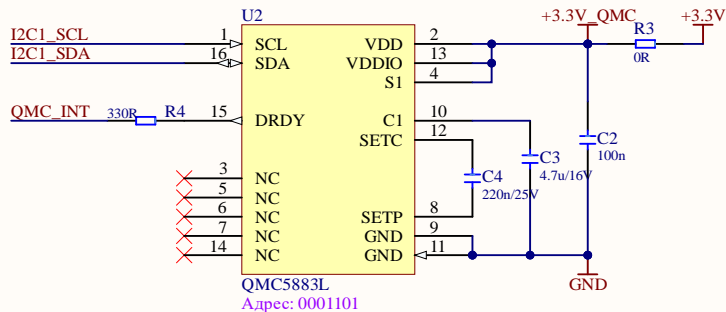

Адрес: 0001101

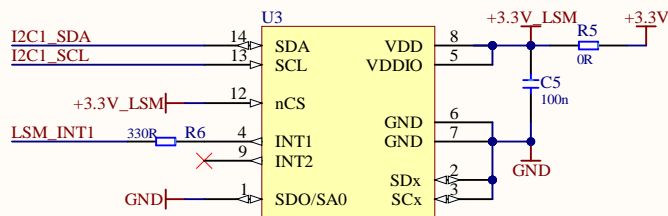

Адрес: 110101x

SDx, SCx, Connect to VDDIO or GND
nCS Input with pull-up 30-50kOhm
I2C least significant bit of the device address (SA0)

