

CP-1597

Cox Research and Technology, Inc.
P.O. Box 77808
Baton Rouge, LA. 70879
(225) 756-3271 Fax (225) 755-1030

GROUND LUG TORQUE SCHEDULE

250MCM	-	325 POUND-INCHES
3/0-4/0	-	250 POUND-INCHES
3-2/0	-	150 POUND-INCHES
6-4	-	110 POUND-INCHES

MAIN AND NEUTRAL LUG TORQUE SCHEDULE

400MCM	-	375 POUND-INCHES
250-350MCM	-	325 POUND-INCHES
3/0-4/0	-	250 POUND-INCHES
2-2/0	-	150 POUND-INCHES


LARGEST MOTOR HP/FLA

200-208V 3Ø	-	100/273
240V	-	125/312
480V	-	250/302
600V	-	350/336


FIELD WIRING TO BE COPPER CONDUCTORS
WITH 75°C INSULATION RATING

2/0 BONDING JUMPER
MAY BE REQUIRED

SOURCE 1

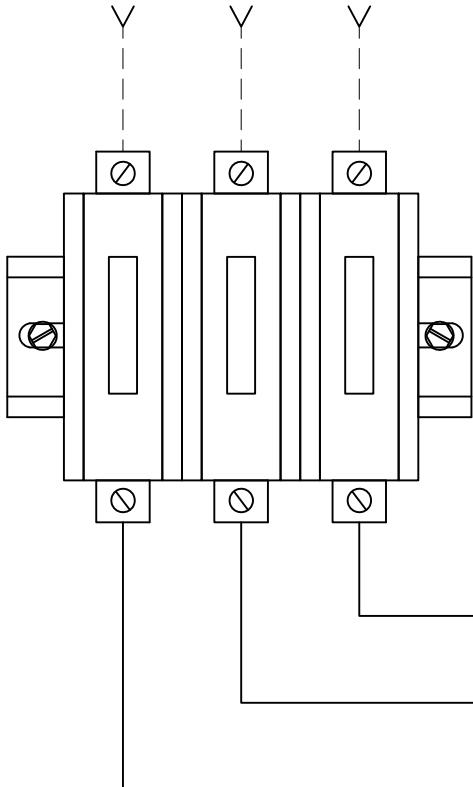

SOURCE 2

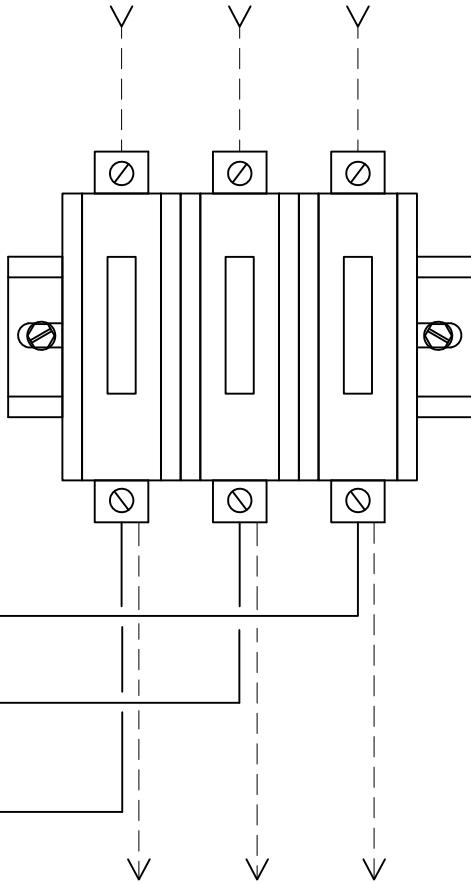

LOAD