


SCHEMATIC DIAGRAM
CP1312R1

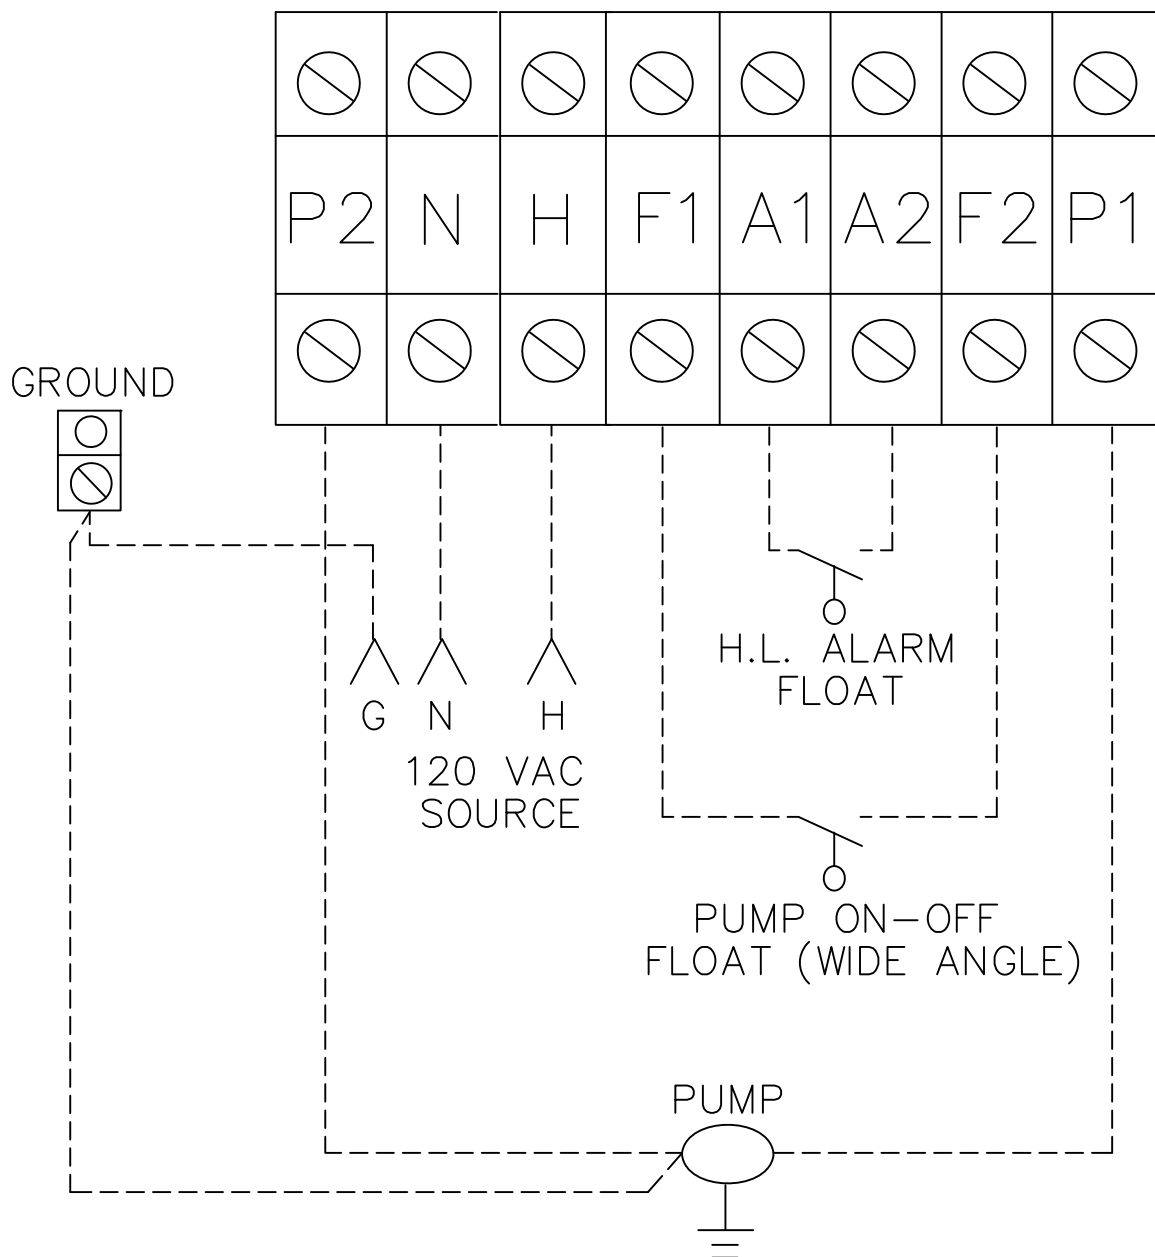

EXTERNAL CONNECTIONS

CP1312R1

NOTES:

1. EXTERNAL DISCONNECT IS REQUIRED
2. PUMP MUST HAVE INTERNAL THERMAL OVERLOAD PROTECTION.
3. PUMP FLOAT MUST BE CAPABLE OF CARRYING FULL MOTOR CURRENT. (MAX PUMP CURRENT MUST NOT EXCEED 16 AMPS)