

Oil-Resistant Soft Buna-N O-Ring

1/8 Fractional Width, Dash Number 228




1-9 Packs \$10.57
10 or more \$8.99

2418T183

Material	Buna-N Rubber
Cross Section Shape	Round
Dash Number	228
Fractional	
Width	1/8
ID	2 1/4
OD	2 1/2
Actual	
Width	0.139"
ID	2.234"
OD	2.512"
Hardness	Durometer 50A (Soft)
For Use With	Acetic Acid Ammonia Boric Acid Brake Fluids Butyl Alcohol Calcium Hydroxide Citric Acid Diluted Salt Solutions Ethanol Ethylene Glycol Glycerin Grease Hydraulic Oils Methanol Mineral Oils Motor Oil Petroleum Fluids Phosphoric Acid Potassium Hydroxide Sodium Bicarbonate
Specifications Met	ASTM D2000, SAE AS568, SAE J200
Temperature Range	-30° to 225° F
Color	Black
RoHS	RoHS 3 (2015/863/EU) Compliant
REACH	REACH (EC 1907/2006) (06/25/2025, 250 SVHC) Compliant
DFARS	Specialty Metals COTS-Exempt
Country of Origin	Taiwan
Schedule B	401693.0000
ECCN	EAR99

For a better seal in low-pressure applications, such as hydraulic return lines and oil drain plugs, these O-rings are softer than standard Buna-N O-rings.

They offer the same level of oil resistance and are often used with hydraulic oil and motor oil.

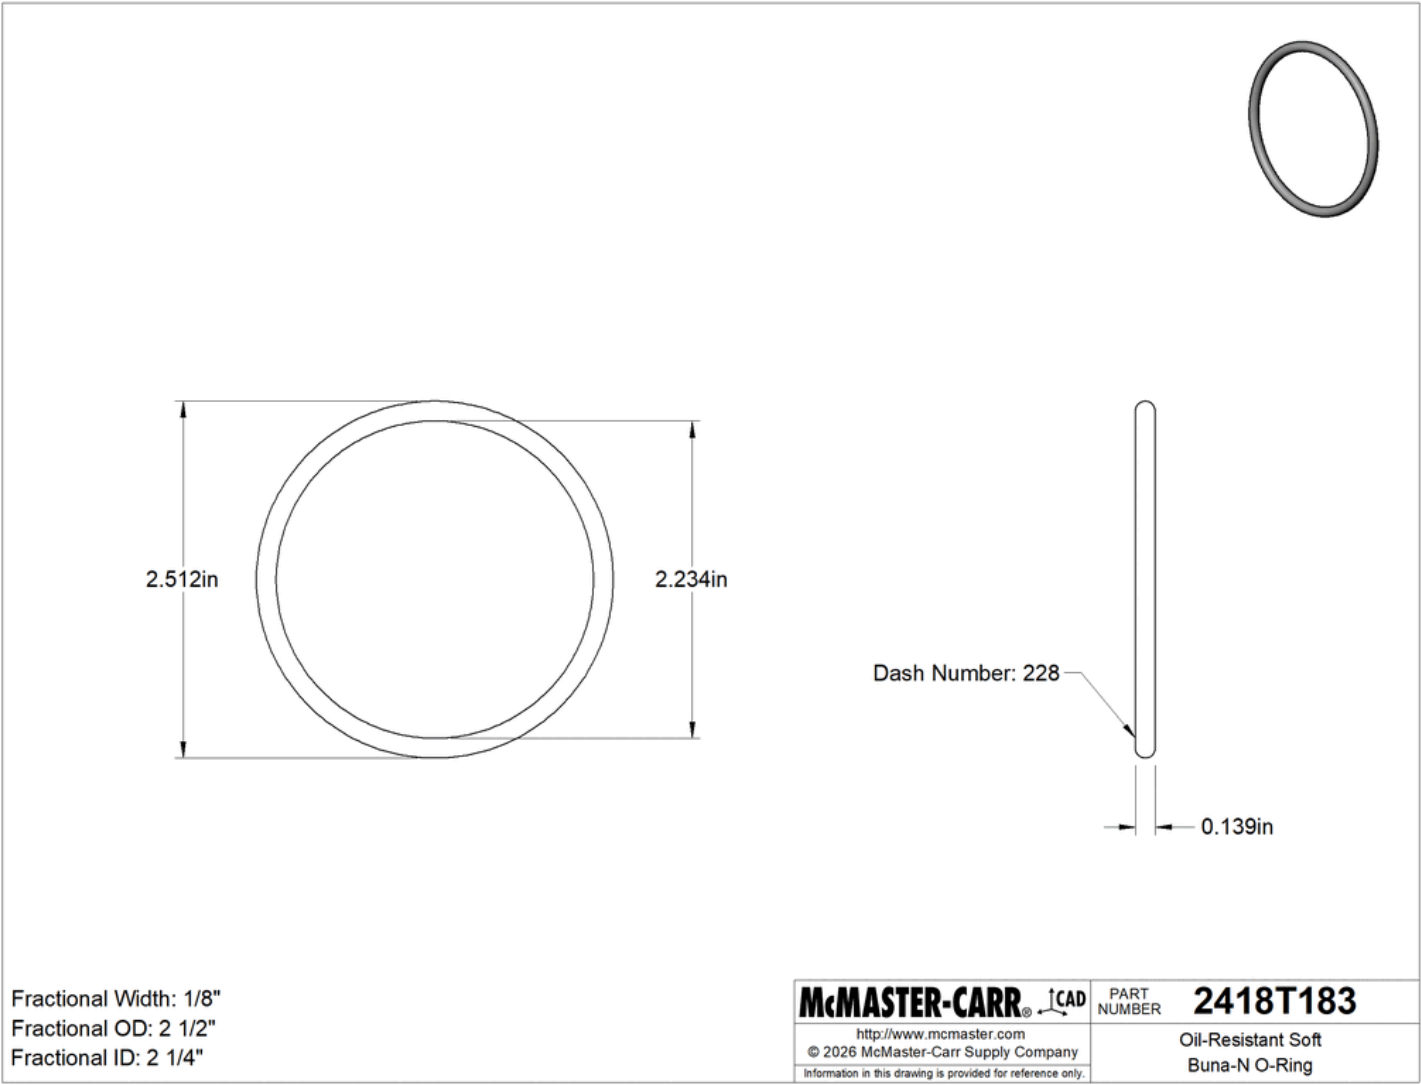

The information in this 3-D model is provided for reference only.