Microchip Pin	Signal	Motor Direction
RA5 RA4	PWM 0-100% Low	Forward
RA5 RA4	Low PWM 0-100%	Reverse

J1 connector

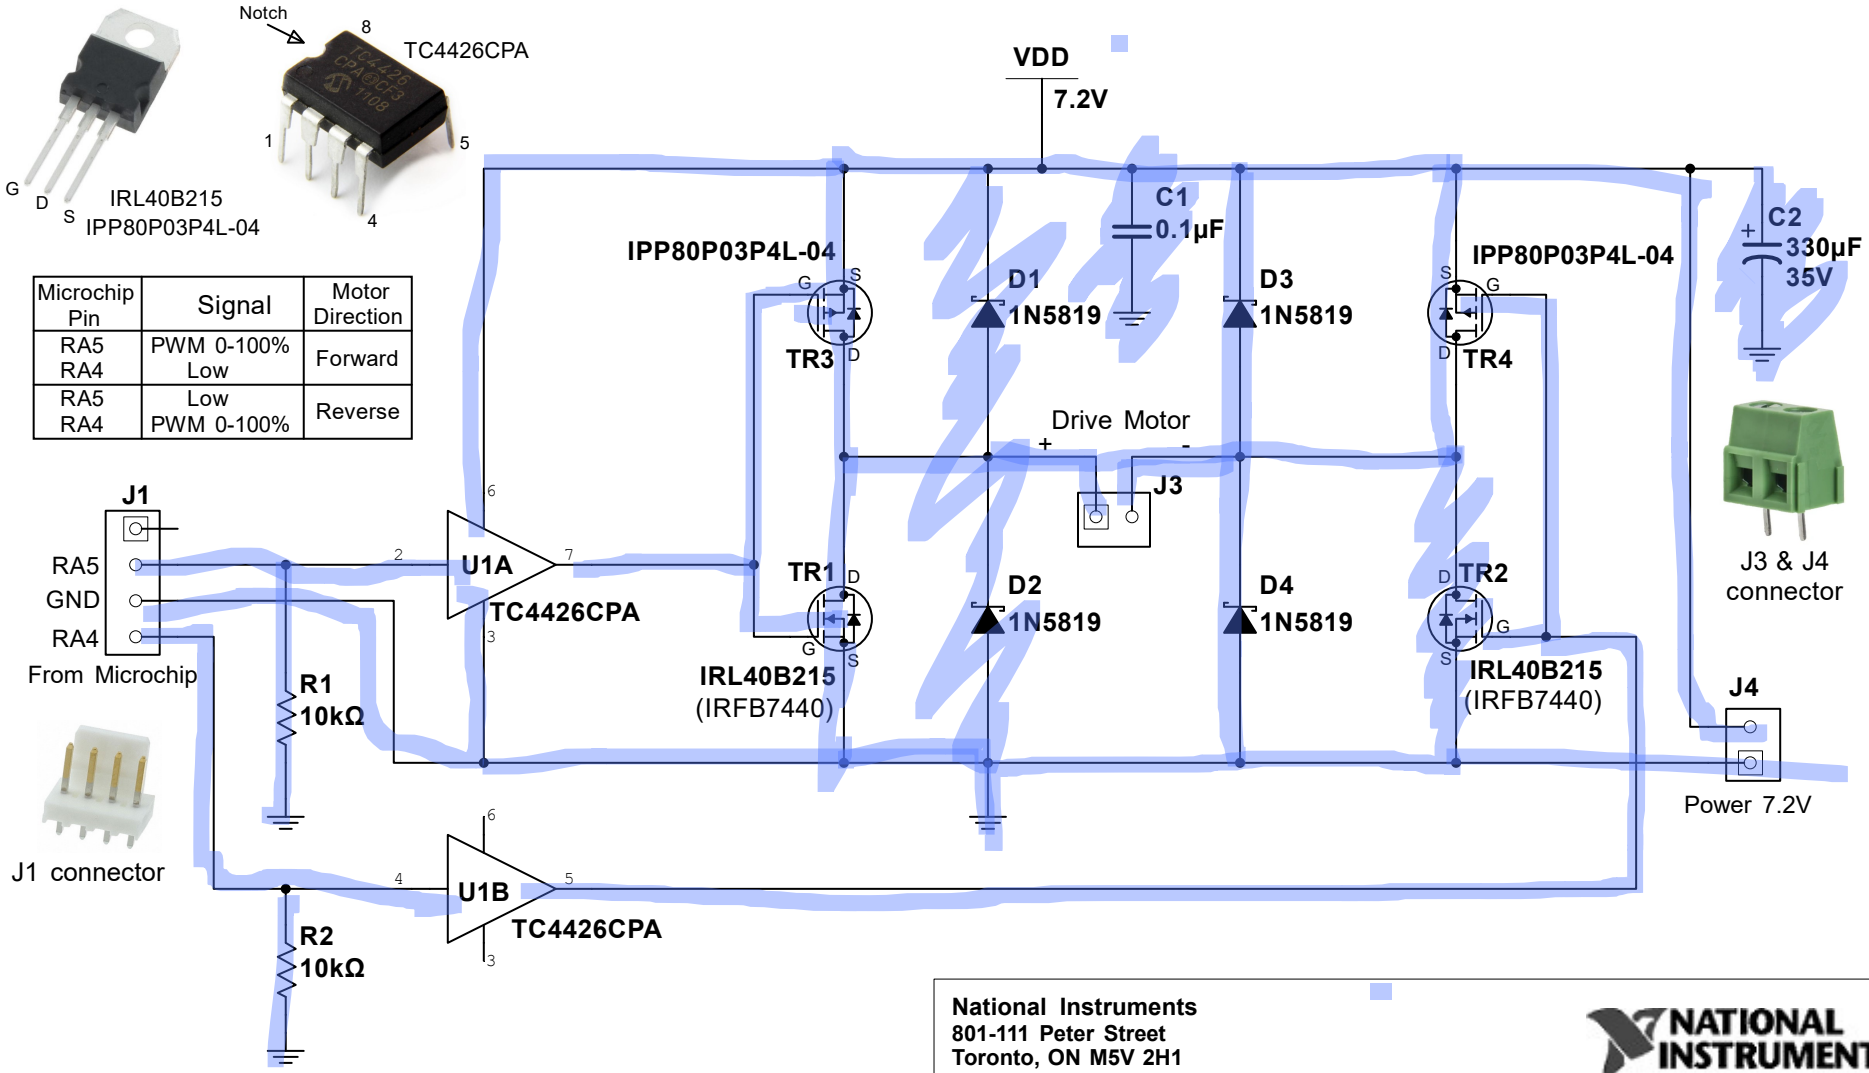

Notes:-
For J1 (signal) external connections use 7/0.2mm equipment wire.
For J4 (power) external connections use 16/0.2mm equipment wire.

To increase the current carrying capacity of the stripboard use parallel tracks or tinning the stripboard tracks with solder.

National Instruments
801-111 Peter Street
Toronto, ON M5V 2H1
(416) 977-5550

Title: Maverick H Bridge TC4426	Desc.: Maverick H Bridge TC4426	
Designed by:	Document No:	Revision:
Checked by:	Date: 14/02/2025	Size: A4
Approved by:	Sheet 1 of 1	