

Fall protection plan template

This is one example of a fall protection plan template. If you choose to use this template, make sure you customise it to your work and work site.

Name of employer: _____

Work site (i.e. civic address) _____

Period for which this plan is valid:

Fall hazards at the work site

Identify the specific work area and circumstances where a worker could fall (e.g. “leading edge of second-floor work area”, “unguarded opening on the third floor”, etc.)

1. **Falling**
2. **Slippery Surface**
3. **ladder unbalance**
4. **Roof Holes**
5. **Weather**
6. **Unstable Work Platform**
7. **Edges**
8. **Communication and coordination**

Fall protection system(s) to be used at the work site

Brief description of the system(s) being used (fall arrest, travel restraint, fall restriction, horizontal lifeline, safety net, work positioning, control zone, etc.)

1. **Harness**
2. **Ropes**
3. **Anchors**
4. **Ladder safety system**
5. **Regular Inspection and maintenance**
6. **Fall Hazard Assessment**
7. **Open ladder 3 ft above the height of the roof edge**
8. **Secure the ladder with Bunzee**

Use a Body harness at all times. Use a shock absorber lanyard to keep impact forces on the body to a minimum. Use nylon rope with locking snap hooks for restraints, lanyard must have self-locking snap hooks. Inspect all professional fall protection equipment before every use.

Anchor(s) to be used

Locations of permanent and improvised (if used) anchors, any special requirements such as connecting hardware, type, thickness, and condition of material to which the anchor is connected to ensure minimum required strength, etc.



The employer should ensure the site has adequate anchor points to minimise the possibility of a worker experiencing a swing fall.

Anchors are attached to the hip of the roof where they are needed.

Install all anchors on the top ridge of the roof. Anchors will be screwed into the roof.

Clearance requirement

This must be calculated (you can use the worksheet below for convenience). The distance the worker falls must be less than the distance to the ground or an object or level below the work area (such as a balcony, mezzanine, or HVAC ducting).

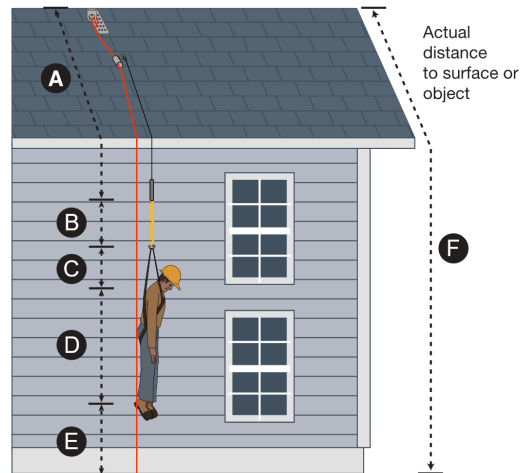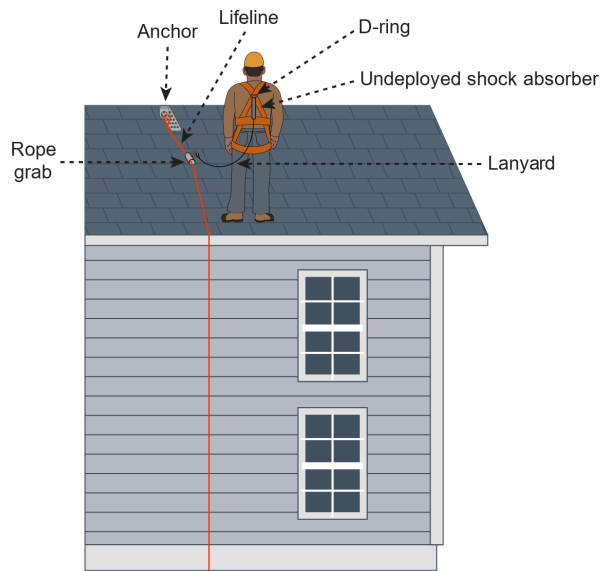

CALCULATE REQUIRED CLEARANCE

A Distance from anchor to rope grab, plus length of lanyard: _____

B Length of shock absorber extended – typically 1.1m (3.6') or 1.75m (5.7'), depending on the absorber: _____

C D-ring slippage and harness stretch – 0.3m (1') minimum: _____


D Height of worker's D-ring from foot level – typically 1.5m (5'), but can be longer for taller workers: _____

E Safety factor – minimum 0.6m (2'): _____

F SUM OF A + B + C + D + E

(Clearance required – i.e. minimum distance from anchor point to nearest surface or object below worker): _____

NOTE: The actual distance to the surface or object below must be greater than the clearance required. If not, a falling worker will strike that lower surface or object. A different anchor location or type of fall protection system may be required.

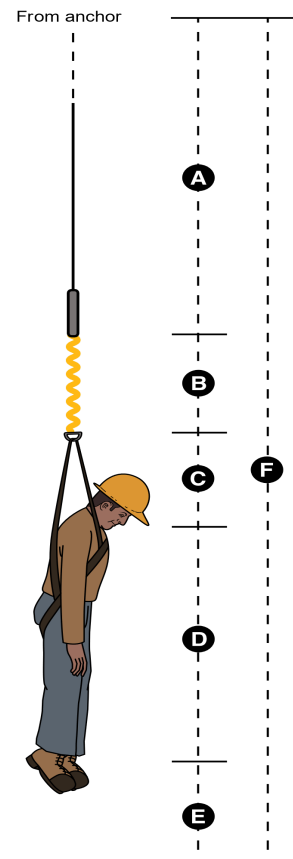

A 12.5ft

B 2 ft

C 1.5ft

D 6 ft

E 2 ft

F= A+B+C+D+E = 24 ft

Procedures to assemble, maintain, inspect, use and disassemble the fall protection system

Procedures for simple systems can be listed here. For complex systems, it is acceptable to reference procedures that appear elsewhere as a separate document. The procedures must be readily available for reference at the work site. This can mean a paper copy of the instructions on-site or an electronic copy that is downloaded to a tablet, laptop, or smartphone. The information must be retrievable without an internet connection so that the person needing it has access to it at all times.

1. **When we use fall protection on the roof first of all place the ladder on a secure base and extend it three feet above the roof.**
2. **Install Anchors on the top ridge of the or on a safe place and hook the ropes with these anchors.**
3. **All Workers wear Harnesses and hook the ropes.**
4. **Inspect all worksites Before starting the work.**

Rescue procedures

List the rescue procedures that are in place to quickly return a worker to safety if the worker is left suspended as a result of a fall.

If any accident happens on the site. First worker should pump his legs frequently to activate muscles. Second, keep watch on the suspended worker for signs and symptoms of orthostatic intolerance. If worker is unconscious keep the worker air passage open and obtaining first aid until 911 arrived.

Worker sign-off

The employer must ensure all workers affected by this fall protection plan have reviewed it. As an example of a way to fulfil that requirement, this template asks workers to sign off on the plan. However, employers are free to determine the best way to fulfil this requirement at their particular work site.

Worker Name: _____	Signature: _____
Worker Name: _____	Signature: _____
Worker Name: _____	Signature: _____
Worker Name: _____	Signature: _____
Worker Name: _____	Signature: _____
Worker Name: _____	Signature: _____

This template is for example purposes only. Completing this template alone will not necessarily put you in compliance with legislation. It is important and necessary that you customize this document to meet the unique circumstances of your work site. Further, it is essential that this document is not only completed, but is used, communicated, and implemented in accordance with the legislation. Neither the Crown, nor its agents, employees, or contractors, will be liable to you for any damages, direct or indirect, arising out of your use of this template.

This template is for example purposes only. Completing this template alone will not necessarily put you in compliance with legislation. It is important and necessary that you customize this document to meet the unique circumstances of your work site. Further, it is essential that this document is not only completed, but is used, communicated, and implemented in accordance with the legislation. Neither the Crown, nor its agents, employees, or contractors, will be liable to you for any damages, direct or indirect, arising out of your use of this template.

Formal hazard assessment and control (template)

Job/position/work type: Owner						Date of assessment: 25 September 2025	
Assessment performed by: (names) Manpreet Singh						Reviewed/revised:	
Tasks (List all tasks/activities of the job/position)	Hazards (List all existing and potential health and safety hazards)	Severity	Likelihood	Risk	Controls (List the controls for each hazard: Elimination, Engineering, Administrative, Personal Protective Equipment)	Date implemented:	
		S x L = R					
Installing shingles	fall from height				ropes		
Install drip edge	slippery surface				anchors		
Install ice and water	unstable surface				shock absorber		
Install synthetic underlayment	working on the slope				secure the ladder		
	weather				open ladder 3 ft above the height of the roof.		
	ladder unstable				proper training		
	roof holes						

Severity: How serious could the consequences be? 3 – It could kill you or cause a permanent disability, today or over time. 2 – It could send you to the hospital. 1 – It could make you uncomfortable.	Likelihood: How likely is it going to happen? 3 – It is highly likely. 2 – It might happen. 1 – It is unlikely.	Risk: Calculate the risk of hazards to prioritize preventive actions. Severity x Likelihood = Risk
--	--	---

This form is for example purposes only. Completing this form alone will not necessarily put you in compliance with the legislation. It is important and necessary that you customize this document to meet the unique circumstances of your work site. Further, it is essential that this document is not only completed, but is used, communicated, and implemented in accordance with the legislation. The Crown, its agents, employees or contractors will not be liable to you for any damages, direct or indirect, arising out of your use of this form.