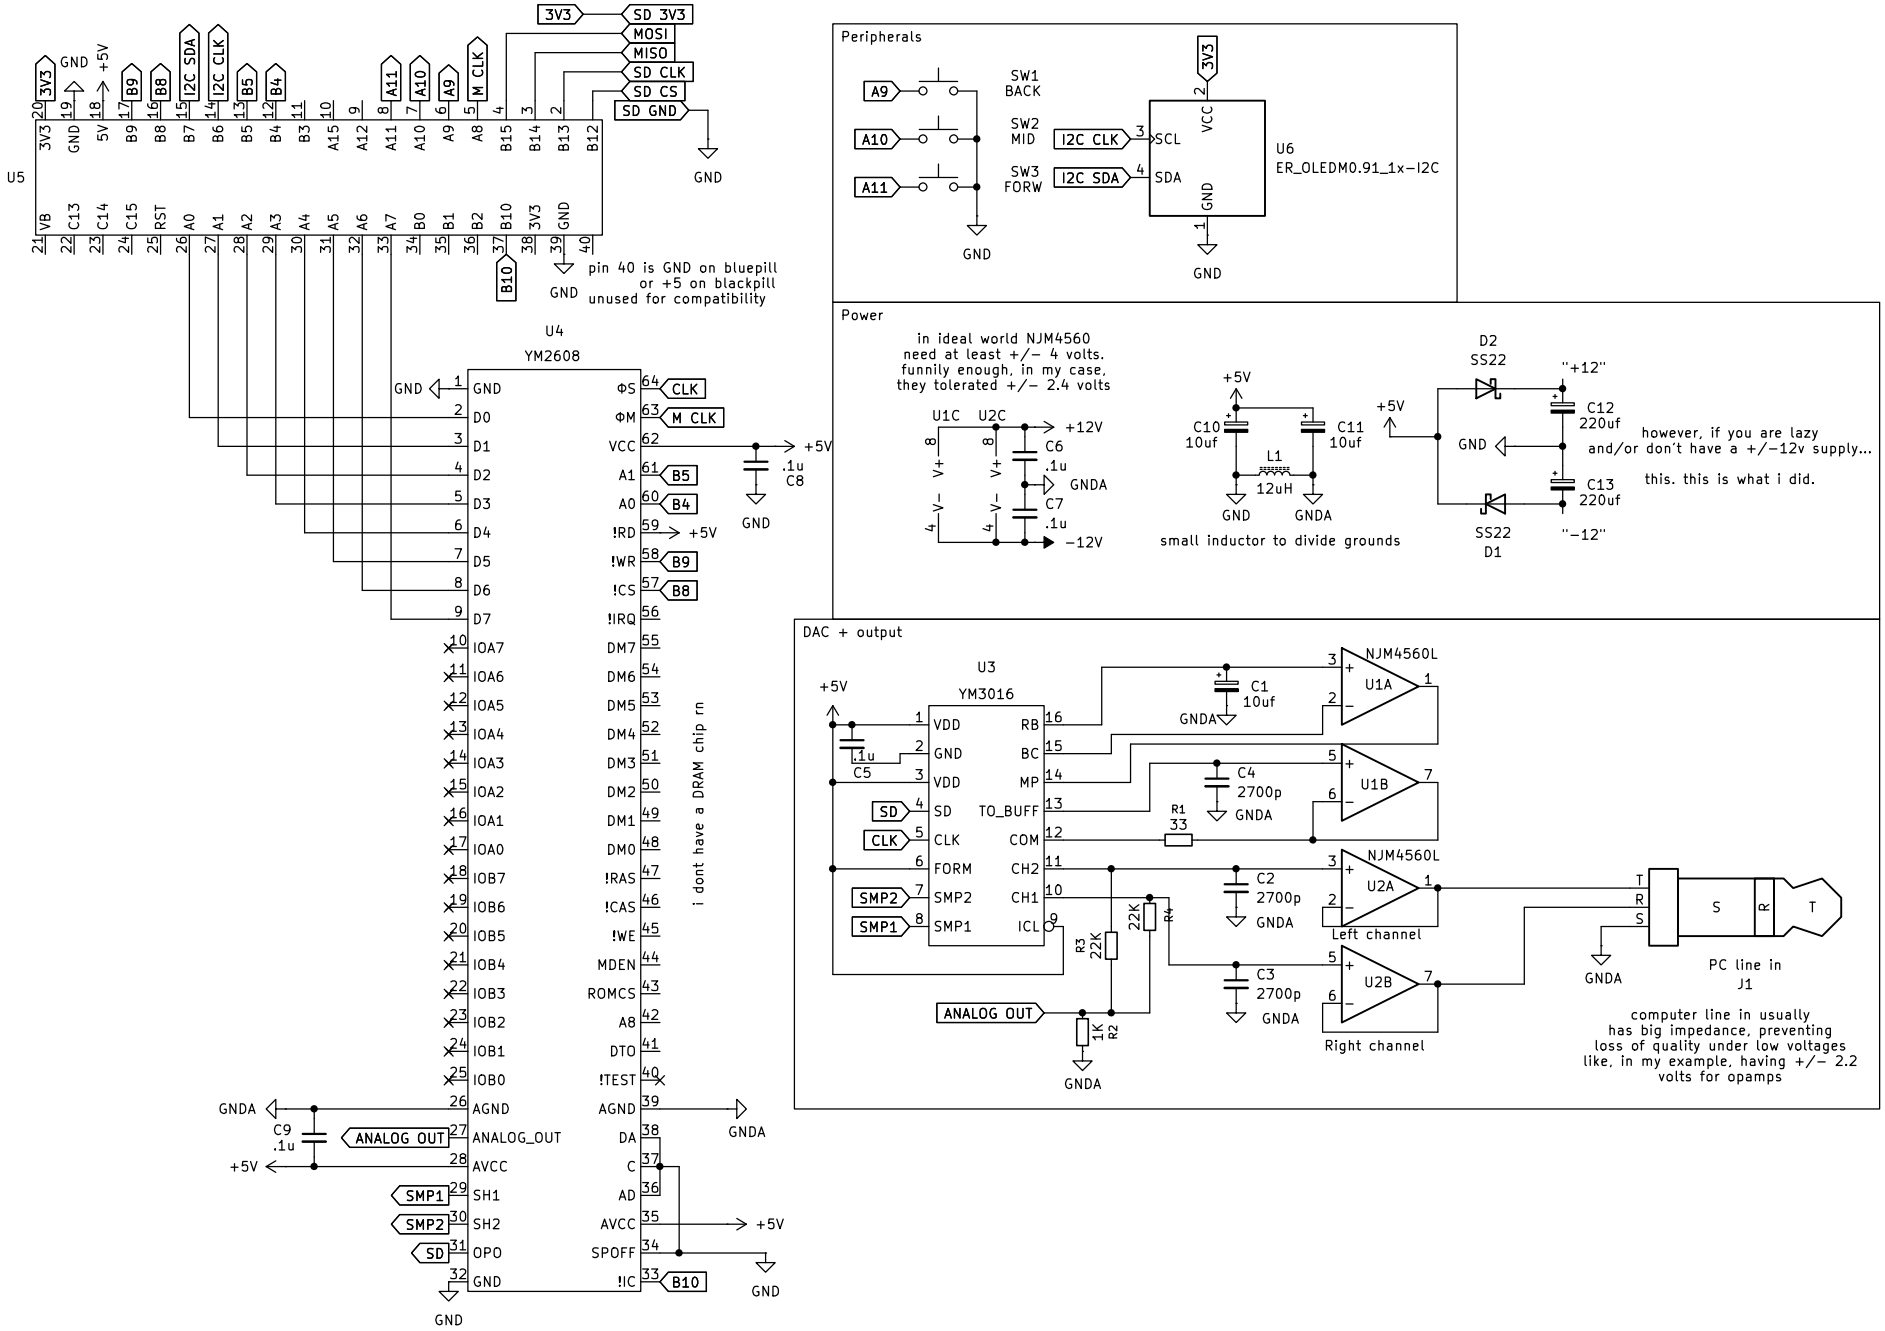
U5
3V3
SD 3V3
MOSI
MISO
SD CLK
SD CS
SD GND
I2C SDA
I2C CLK
M CLK
GND
+5V
pin 40 is GND on bluepill
or +5 on blackpill
unused for compatibility
U4
YM2608
i dont have a DRAM chip rn
ANALOG OUT
Peripherals
SW1
BACK
SW2
MID
SW3
FORW
U6
ER_OLEDM0.91_1x-I2C
Power
in ideal world NJM4560
need at least +/- 4 volts.
funnily enough, in my case,
they tolerated +/- 2.4 volts
+12V
-12V
GNDA
small inductor to divide grounds
however, if you are lazy
and/or don't have a +/-12v supply...
this. this is what i did.
DAC + output
U3
YM3016
NJM4560L
Left channel
Right channel
PC line in
J1
computer line in usually
has big impedance, preventing
loss of quality under low voltages
like, in my example, having +/- 2.2
volts for opamps