

Alternative for sound output  
 If the PIC32 can cope with full 44.1KHz stereo audio streams I will use this circuit instead of PWM  
 Remember that CAN i/f has to be moved to SPI1 if used.

Schema taken from an other open source project at <http://www.k9spud.com/traxmod/>

SweetBox

Copyright (C) 2008 Ake Hedman


<http://www.vscp.org>

sweetbox

10/11/08 1:34 PM

Sheet: 1/1

0.0.1

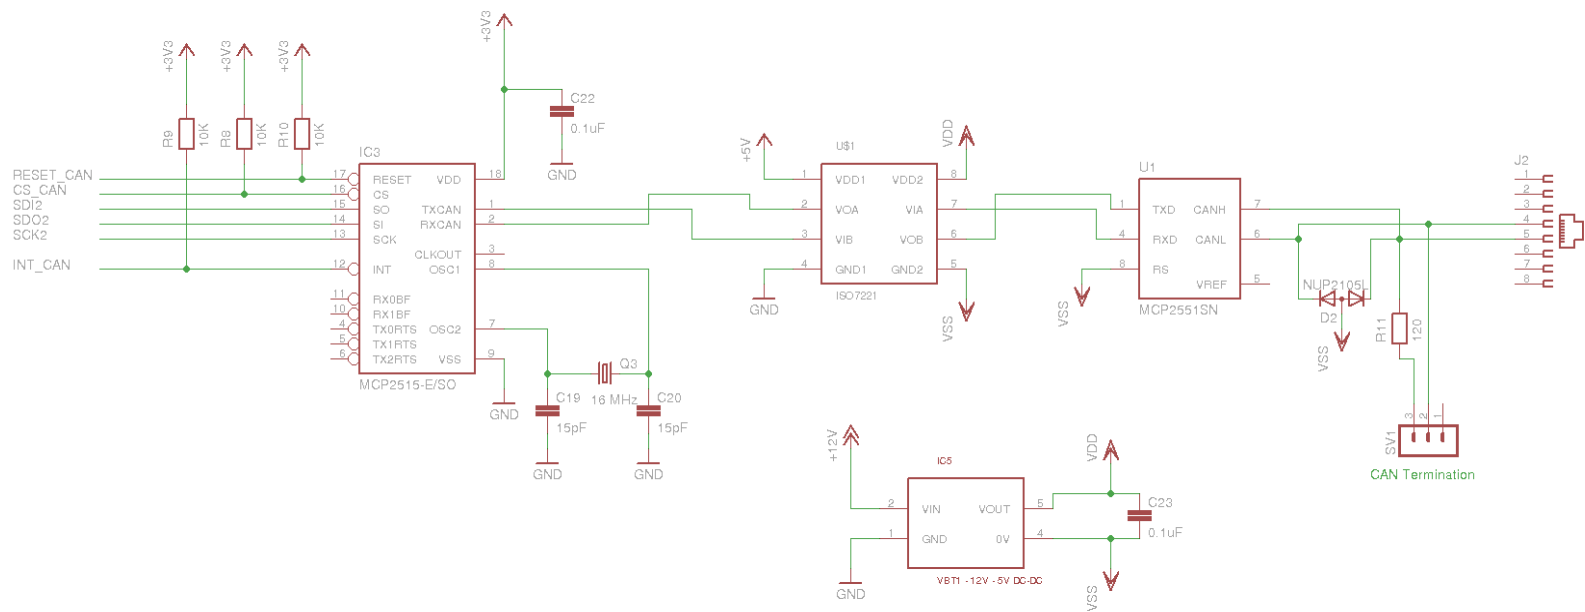

**SweetBox**  
CAN

Copyright (C) 2008 Ake Hedman


<http://www.vscop.org>

sweetbox

10/11/08 1:34 PM

Sheet: 1/1

0.0.1

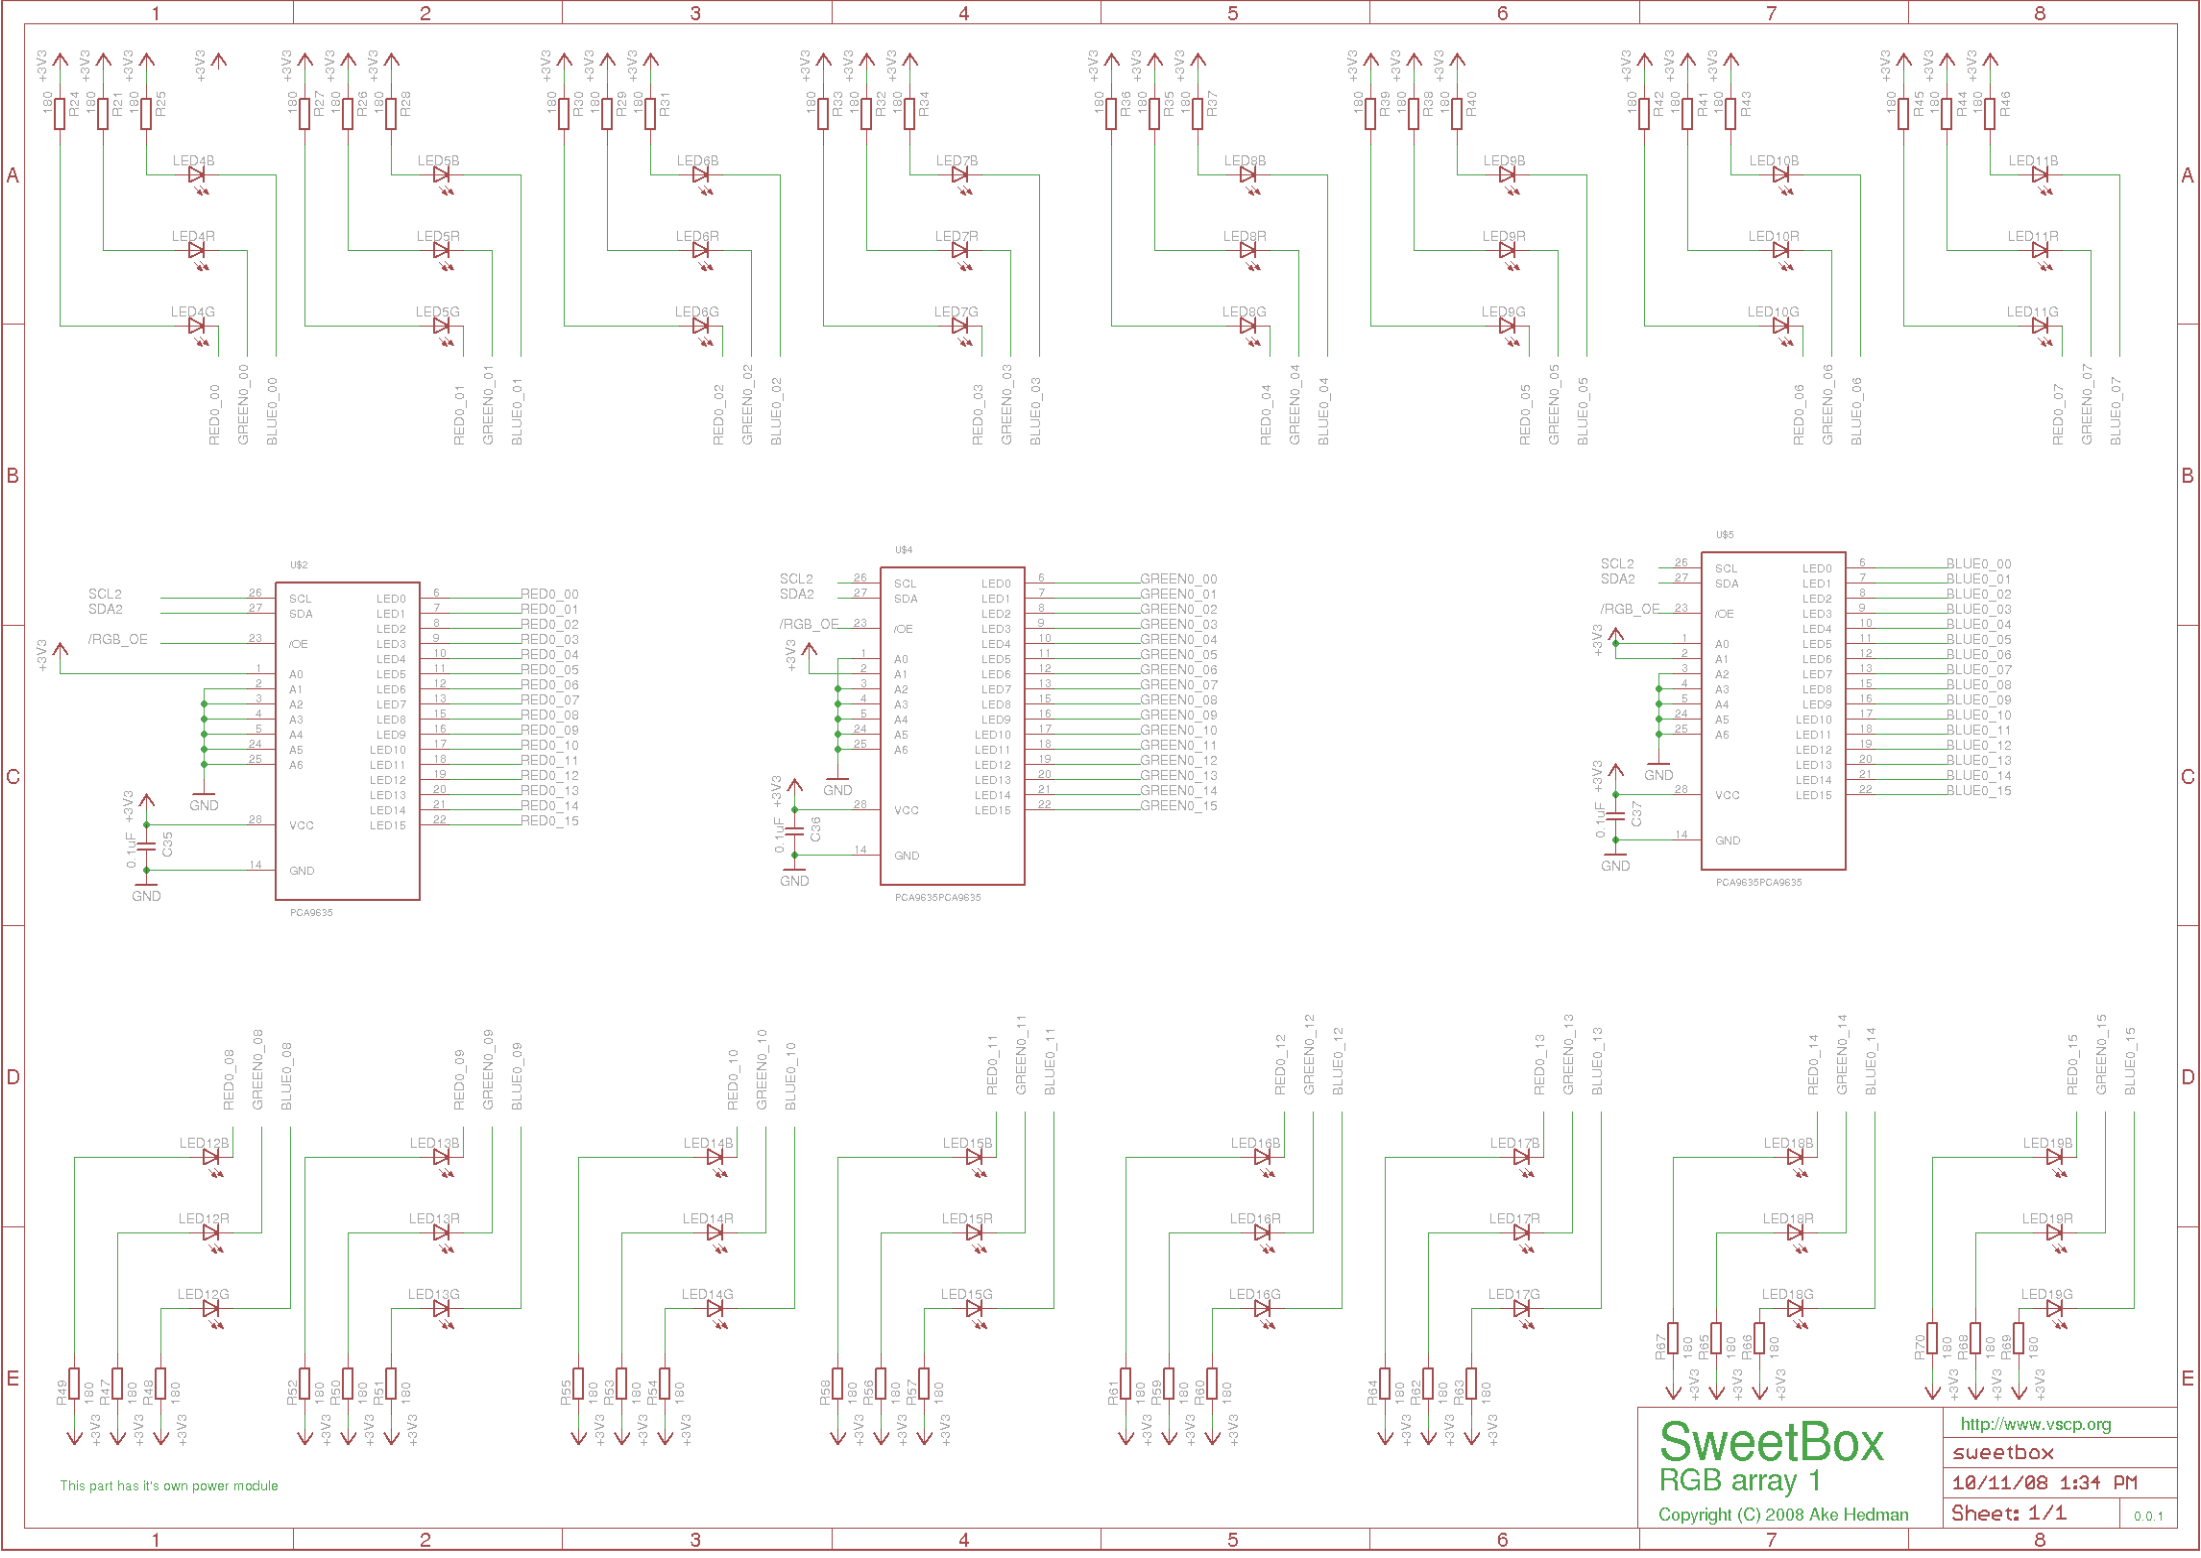

This part has it's own power module

# SweetBox

## RGB array 1

Copyright (C) 2008 Ake Hedman

<http://www.vscp.org>

sweetbox

10/11/08 1:34 PM

Sheet: 1/1

0.0.1

