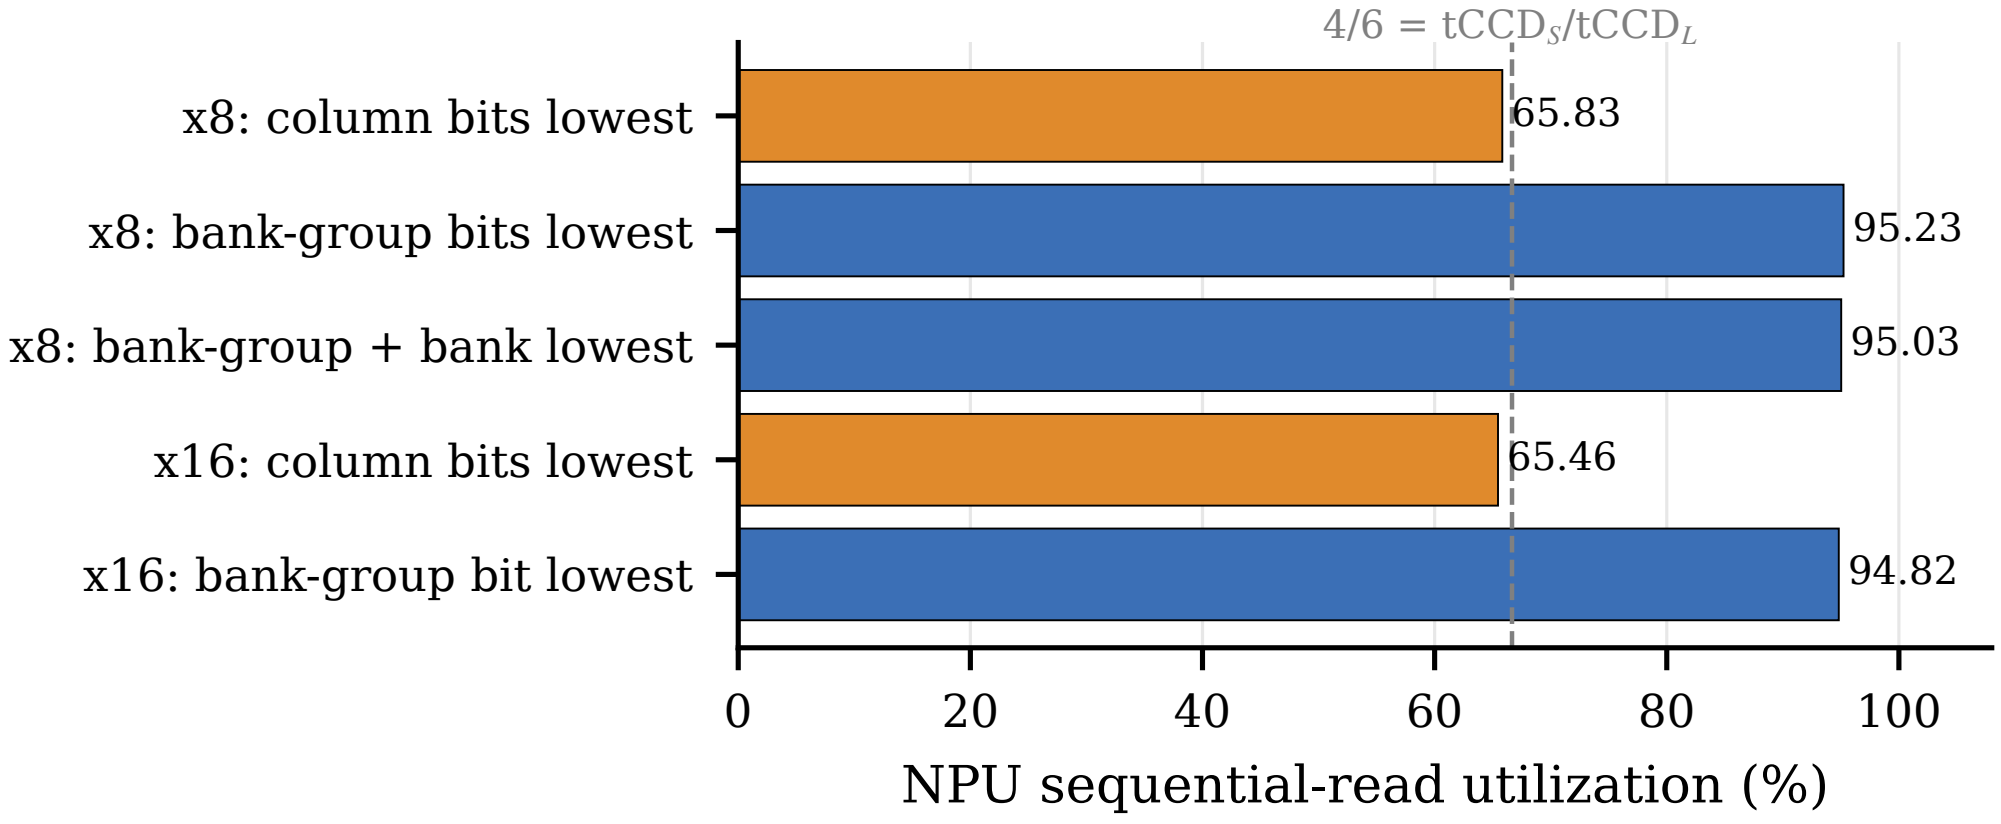
4/6 = tCCD$_S$/tCCD$_L$
x8: column bits lowest
65.83
x8: bank-group bits lowest
95.23
x8: bank-group + bank lowest
95.03
x16: column bits lowest
65.46
x16: bank-group bit lowest
94.82
0
20
40
60
80
100
NPU sequential-read utilization (%)