GRS
EQUIPMENTS AND SERVICES

QUALITY | RELIABILITY | PERFORMANCE

HORIZONTAL DIRECTIONAL DRILLING MACHINES

INDIA AUTHORIZED DEALER FOR

STETON
ENGINEERING MACHINERY

PRODUCT CATALOG

ADVANCED TECHNOLOGY SUPERIOR PERFORMANCE



HIGH PERFORMANCE | ADVANCED TECHNOLOGY | HIGH EFFICIENCY | DURABLE & RELIABLE | EXCELLENT AFTER SALES SERVICE

GRS EQUIPMENT AND SERVICES
Ghansoli, Maharashtra

FOR ENQUIRIES
8655886888 / 8922805992

www.grsequipment.in

GRS

STETON
ENGINEERING MACHINERY

S60 水平定向钻机

HORIZONTAL DIRECTIONAL DRILLING MACHINE



主要性能特点 MAIN PERFORMANCE CHARACTERISTICS

- 该机采用闭式液压回路与主泵驱动动力强劲，确保钻进扭矩稳定，回拖和推进速度适合各种施工。
- 动力头采用浮动式夹紧装置和六棱主动钻杆，能大大提高钻杆的上卸速度和攻丝不打滑。
- 该机为全液压系统，具备低故障率和易于维护的特点。
- 整机结构合理，功能齐全，造型美观，满足人性化使用更轻松方便。
- 配置固定，操作行走更稳人性化。
- 适用于城市排水管道铺设、石油、天然气、电力电缆光缆敷设等施工领域。

- The power head is driven by a closed hydraulic circuit and main pump, providing strong power, ensuring stable drilling torque, and making the pullback and drilling speed suitable for various construction.
- The rotary power head adopts a floating clamp device and a hexagonal active drill rod, which greatly improves the speed of loading and unloading the drill rod without slipping.
- Equipped with a full hydraulic system, it features low failure rate and easy maintenance.
- The machine has a reasonable structure, complete functions, beautiful appearance, and is more convenient and user-friendly.
- Fixed counterweight ensures stable and user-friendly operation.
- Widely used in horizontal directional projects such as municipal water and sewage pipeline laying, oil & gas pipeline laying, power cable and fiber optic cable installation.

技术参数 SPECIFICATIONS

项目 Item	参数 Parameter
发动机 Engine Power	46.3/2200KW
最大推力 Max Thrust force	60KN
最大回拖力 Max Pullback force	60KN
最大扭矩 Max Torque	2000N.M
最高特迳 Max Rotary speed	180rpm
最高动力头推进速度 Max Moving speed of power head	45m/min
最大泥浆泵流量 Max Mud pump flow	75L/min
最大泥浆压力 Max Mud pressure	6 ± 0.5Mpa

项目 Item	参数 Parameter
尺寸 size(L*W*H)	3850x1424x1550mm
重量 weight	3.5T
钻杆直径 Diameter of drilling rod	Φ42mm
钻杆长度 Length of drilling rod	1.8m
回拖管径 Max diameter of pullback pipe	Φ150~ Φ600mm
最大穿越长度 Max construction length	~100m
入射角 Incidence Angle	11°~20°
爬坡角 Climbing Angle	15°

GRS
EQUIPMENT AND SERVICES

STETON
ENGINEERING MACHINERY

S200 水平定向钻机

HORIZONTAL DIRECTIONAL DRILLING MACHINE



主要性能特点 MAIN PERFORMANCE CHARACTERISTICS

- 配置国际知名品牌动力，动力强劲，性能稳定，可靠性高，故障率低，使用寿命长。
- 动力头采用浮动式夹紧装置和六棱主动钻杆，能大大提高钻杆的上卸速度和夹持不打滑。
- 动力头前后进采用马达直接驱动，回转无级变速，回扩孔无级变速，操作简单实用。
- 3支撑点配置键盘操作结构稳定，履带行走强壮有力，整机作业稳定性高，操作行走更具人性化。
- 整机布局合理，功能齐全，造型美观，满足人性化使用更轻松方便。

- Equipped with well-known brand engine, with strong power, stable performance, high reliability, low failure rate and long service life.
- The power head adopts a floating clamping device and a hexagonal active drill rod, which greatly improves the speed of loading and unloading the drill rod without slipping.
- The forward and backward propulsion of the power head is directly driven by the motor, and the backlash is stepless speed change. The hole reaming is stepless speed change, easy and practical to operate.
- 3 support points configuration makes the whole machine structure stable, the crawler walking strong, the whole machine operation stability high, operation and walking more humanized.
- The whole machine layout is reasonable, complete in function and beautiful in shape, which makes it easier and more convenient to use in a user-friendly way.

技术参数 SPECIFICATIONS

项目 Item	参数 Parameter	项目 Item	参数 Parameter
发动机 Engine Power	110/2200KW	尺寸 size(L*W*H)	5680x1720x2150mm
最大推力 Max Thrust force	200KN	重量 weight	7T
最大回拖力 Max Pullback force	200KN	钻杆直径 Diameter of drilling rod	Φ60mm
最大扭矩 Max Torque	6000N.M	钻杆长度 Length of drilling rod	3m
最高转速 Max Rotary speed	180rpm	回拖管径 Max diameter of pullback pipe	Φ150~Φ700mm
最高动力头推进速度 Max Moving speed of power head	38m/min	最大穿越长度 Max constructionlength	~500m
最大泥浆泵流量 Max Mud pump flow	250L/min	入射角 Incidence Angle	11-20°
最大泥浆压力 Max Mud pressure	8±0.5Mpa	爬坡角 Climbing Angle	14°

GRS

STETON
— ENGINEERING MACHINERY —

S350 水平定向钻机

HORIZONTAL DIRECTIONAL DRILLING MACHINE



- **POWERFUL PERFORMANCE**
- **STABLE & RELIABLE OPERATION**
- **PRECISE CONTROL HIGH EFFICIENCY**
- **DURABLE CONSTRUCTION**

主要性能特点 MAIN PERFORMANCE CHARACTERISTICS

- 配置国际知名品牌动力，动力强劲，性能稳定，可靠性高、故障率低，使用寿命长。
- 动力头采用浮动式夹紧装置和六棱主动钻杆，能大大提高钻杆的上卸速度和对接平行度。
- 动力头前后推进采用马达直接驱动，回拖无级变速，回扩无级变变速，操作简单实用。
- 3 支前后配置使整机结构稳定，履带行走强壮有力，整机作业稳定性高，操作行走更具人性化。
- 整机布局合理、功能齐全、造型美观，满足人性化使用更轻松方便。

- Equipped with well-known brand engine, with strong power, stable performance, high reliability, low failure rate and long service life.
- The power head adopts a floating clamping device and a hexagonal active drill rod, which greatly improves the speed of loading and unloading the drill rod without slipping.
- The forward and backward propulsion of the power head is directly driven by the motor, and the backhaul is stepless speed change. The hole reaming is stepless speed change, easy and practical to operate.
- 3 support points configuration makes the whole machine structure stable, the crawler walking strong, the whole machine operation stability high, operation and walking more humanized.
- The whole machine layout is reasonable, complete in function and beautiful in shape, which makes it easier and more convenient to use in a user-friendly way.

技术参数 SPECIFICATIONS

发动机 Engine Power	153/2200 kW
最大推力 Max Thrust force	350/700 kN
最大回拉力 Max Pullback force	350/700 kN
最大扭矩 Max Torque	13000/15800 N.m
最高转速 Max Rotary speed	180 rpm
最高动力头推进速度 Max Moving speed of power head	38 m/min
最大泥浆泵流量 Max Mud pump flow	400 L/min
最大泥浆压力 Max Mud pressure	10–0.5 MPa

尺寸 size(L*W*H)	6800×2240×2260 mm
重量 weight	11 T
钻杆直径 Diameter of drilling rod	Φ73 mm
钻杆长度 Length of drilling rod	3 m
回拖管径 Max diameter of pullback pipe	Φ1200 mm (根据实际要求) Based on actual requirements
最大穿越长度 Max constructionlength	450 m (根据实际要求) Based on actual requirements
入射角 Incidence Angle	11°–20°
爬坡角 Climbing Angle	15°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON

DRILLING MACHINE

S450 水平定向钻机...

主要性能特点 Main Performance Characteristics

- 推进性能采用双液压减速系统，其液压系统与传统液压系统相比工作效率提高20%以上，系统效率提高约50%左右，设备节能20%以上等。
- 采用集成的全套操作手柄及按钮，节能、环保、高效、动力强劲。
- 无线遥控行走系统，彻底能调前行走、转场，装运过程中的安全隐患事事井80X300mm钻杆，机身占地适中，满足各类工程地质及施工的需求。
- 多维度旋转供给自动拆一杆定一杆，大大提高了产品性能和可靠性和安全性。
- 履带采用加厚钢镜链加履带，日常行走更稳定，及部件性能更好和通过性更高。
- 推进及回拉均采用独立阀箱，有效冷却，正倒挡保，保养功能。

- The pull-push unit adopts a dual-circuit hydraulic system, which, compared to traditional hydraulic systems, increases efficiency by over 20%, reduces heat generation by around 50%, and achieves energy savings of over 20%.
- Utilizes Cummins specialized engines for construction machinery, which are energy-efficient, environmentally friendly, highly efficient, and provide powerful performance.
- Wireless remote control walking system ensures the safety of the drilling, during walking, rotation, and loading processes. It is compatible with Φ83×3000mm drill rods, with a moderate footprint meeting the demands for difficult construction in many cases.
- The main hydraulic components are sourced from top international brand factories, significantly enhancing product performance reilability and safety.
- Track are made of steel with a rubber track pads,capable of adapting to lands with a high/lowing movement on different types of roads.
- The pull-pull mechanism adopts a gear rack structure, offering high efficiency, long lifespan, stable operation, and easy maintenance.

High Power Output
Strong power, stable performance, efficient and reliable.

Advanced Control System
Easy operation, more intelligent, higher construction efficiency



Suitable for Φ83x3000mm drill rod, widely used in various projects

Sturdy & Durable
Robust structure, long service life

Easy Maintenance
Accessible design, convenient maintenance

技术参数 Specifications

发动机 Engine Power	179/220KW	尺寸 size(L*W*H)	7000x2480x2450mm
最大推力 Max Thrust force	450KN	重量 weight	13T
最大回拖力 Max Pullback force	450KN	钻杆直径 Diameter of drilling rod	Φ83mm
最大扭矩 Max Torque	20000 N.M	钻杆长度 Length of drilling rod	3m
最高转速 Max Rotary speed	138rpm	回拖管径 Max diameter of pullback pipe	Φ1300mm
最高动力头推进速度 Max Moving speed of power head	42m/min	最大穿越长度 Max construction length	650m
最大泥浆泵流量 Max Mud pump flow	450L/min	入射角 Incidence Angle	11°~20°
最大泥浆压力 Max Mud pressure	10±0.5Mpa	爬坡角 Climbing Angle	15°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON
DRILLING MACHINE

S520 水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

主要性能特点
MAIN PERFORMANCE CHARACTERISTICS

- 大功率、稳定的定向钻机系统，其液压系统与传统液压系统相比工作效率提高20%以上，节能节油约20%。
  Both the rotation and pull-pull mechanisms are driven by advanced hydraulic systems, which improve efficiency by 15%-20% compared to traditional hydraulic systems, resulting in energy savings of 15%-20%.
- 采用集成的全套操作手柄及按钮，节能、环保、高效、动力强劲。
  Equipped with Cummins specialized engines for construction machinery, providing powerful performance.
- 先进的无线遥控系统，控制性能优异，实现掘进、旋转、装运过程中的安全隐患。
  Wireless remote control walking system ensures safe walking and rod rotation processes.
- 施工过程中的定向钻杆与孔壁摩擦阻力小化加固油缸，大大提高施工人员劳动强度，提高工作效率。
  The steel rod support structure arm mechanism with adjustable lifting angle solves the issue of loading oil rods, making the process convenient and efficient.
- 多重更换地貌前合动作一杆到度，大大提高了产品性能和可靠性和安全性。
  Compatible with Φ89×3000mm drill rods with moderate footprint, balancing efficient construction and low requirements for more size construction in various cases.
- 设计采用加厚钢板和加强润滑，日常行走更稳定，及部件性能更好和通过性更高。
  Our cutting-edge seismic-resistant construction enhances construction performance reliability, significantly enhancing product performance reliability.
- 齿进及回拉均采用独立阀箱，有效冷却，正倒挡保，保养功能。
  Rack gear propulsion system is reliable, easy to maintain, and has a longer service life.
- 适用Φ89×3000mm钻杆，机身占地适中，满足各类工程地质及施工的需求。
  Ratchet gear mechanism ensures the reliability of pull-back speed regulation of walking mechanism and drilling.
- 大液压油缸，动力更加强劲，更可靠、持久，运行时间更长。
  Rotate operating lever, walking lever, and feed push-button are designed for smooth operation and ease of use.

液压马达
动力更加强劲，更可靠，持久，
运行时间更长

适用Φ89×3000mm钻杆，
机身占地适中
满足各类工程地质及
施工的需求



大泵 + 双泵
大动力输出

康明斯发动机
充足的动力，节能、环保、
高效、动力强劲

舒适可旋转（液压）
操作座椅

技术参数 Specifications

发动机 Engine Power	194/2200KW/r	尺寸 size(L*W*H)	7340x2350x2500mm
最大推力 Max Thrust force	520KN	重量 weight	13T
最大回拖力 Max Pullback force	520KN	钻杆直径 Diameter of drilling rod	Φ89mm
最大扭矩 Max Torque	27000N.M	钻杆长度 Length of drilling rod	3m
最高转速 Max Rotary speed	138rpm	回拖管径 Max diameter of pullback pipe	Φ1500mm
最高动力头推进速度 Max Moving speed of power head	42m/min	最大穿越长度 Max construction length	700m
最大泥浆泵流量 Max Mud pump flow	600L/min	入射角 Incidence Angle	11°~20°
最大泥浆压力 Max Mud pressure	10±0.5Mpa	爬坡角 Climbing Angle	14°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

S520

GRS
EQUIPMENTS AND SERVICES

STETON

DRILLING MACHINE

S600A 水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

主要性能特点

MAIN PERFORMANCE CHARACTERISTICS

- 传动性能采用双液压减速系统，其液压系统与传统液压系统相比工作效率提高15%-20%。
- 整体、模块化结构布局合理，互不干涉，可整体吊装，快速组装，方便维护保养。
- 采用康明斯工程机械专用发动机，功率强劲。
- 大功率回转头驱动机构，动力强劲，同时能增大外扭矩控制可以降低开孔扭矩，提高安全性能。
- 采用回环同头驱动机制，转矩大、支承重量大、回转寿命长。
- 采用可伸缩钻杆和翻卸材料托杆和回转夹夹手机构，超高钻杆的使用寿命，及钻杆的开孔性能，大大降低施工人员劳动强度，提高工作效率。
- 适用Φ89×3000mm钻杆，机身占地适中，满足各类工程地质及施工的需求。
- 配置无线遥控行走系统，操作便捷、工作可靠。
- 配置康明斯发动机，功率更大，工作寿命更长。
- 配置康明斯发动机功率更大，工作寿命更长。
- 配置防溅罩和紧急停机装置，工作手操系统性能保护功能更完善。
- 配置伸缩式排渣(泥)口，用于清除钻进过程中产生的泥浆和渣屑，及可以远距离合流注土缓解方法。

- The transmission system adopts a dual hydraulic reduction system, which improves work efficiency by 15%-20% compared to traditional hydraulic systems.
- Overall modular structure with reasonable layout, no interference between components, allowing for integrated lifting, quick assembly, easy maintenance.
- Equipped with Cummins construction machinery engine, delivering strong power.
- High-torque rotary head drive, provides strong power and increases additional torque time to reduce operating torque, improving safety.
- Four-planetary rotary reducer with high torque, high load capacity, and long service life.
- Drill rods and swivel protection system made of 8-inch special wear-resistant steel, extending service life and enhancing operating performance, significantly reducing labor intensity and improving work efficiency.
- Compatible with Φ89×3000mm drill rods, moderate footprint, suitable for large-scale geological and construction projects.
- Wireless remote control walking system for convenient and reliable operation.
- Equipped with Cummins engine for greater power and longer service life.
- Roll-over protection frame and emergency stop device for better operational safety.
- Telescopic spoil discharge system for removing drilling mud and cuttings, with long-distance integrated discharge method.

液压马达
扭矩大、传动稳定；
施钻速度可无级调整；
推拉效率更高、运行平稳

适用Φ89×3000mm钻杆，机身占地适中
满足各类工程地质及施工的需求



大象腿支撑
稳定可靠、快速升降
适应复杂地形施工

康明斯发动机
发动机功率大、动力强劲、
节能、环保、高效、动力强劲

伸缩式排渣(泥)口
远距离合流排土
减少人工清理，提高效率

S600A

技术参数 Specifications

发动机 Engine Power	194/220KW	尺寸 size(L*W*H)	8100x2500x3131mm
最大推力 Max Thrust force	600/1200KN	重量 weight	14T
最大回拖力 Max Pullback force	600/1200KN	钻杆直径 Diameter of drilling rod	Φ89mm
最大扭矩 Max Torque	30000N.M	钻杆长度 Length of drilling rod	3m
最高转速 Max Rotary speed	120rpm	回拖管径 Max diameter of pullback pipe	Φ1500mm
最高动力头推进速度 Max Moving speed of power head	48m/min	最大穿越长度 Max construction length	810m
最大泥浆泵流量 Max Mud pump flow	600L/min	入射角 Incidence Angle	11°~20°
最大泥浆压力 Max Mud pressure	10 ± 0.5Mpa	爬坡角 Climbing Angle	14°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。

We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON

DRILLING MACHINE

S600A-L

水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

主要性能特点

MAIN PERFORMANCE CHARACTERISTICS

- 旋转、推进采用闭式液压系统，转速范围低至15%~20%，主系升级更稳定、更可靠，钻孔、旋转扭矩更大。
- 整体、模块化结构布局合理，互不干涉，可整体吊装、快速连接，方便维护保养。
- 采用康明斯工程机械专用发动机，动力强劲。
- 大功率回转头驱动机构，动力强劲，同时能做大外扭矩控制可以降低开孔扭矩，提高安全性能。
- 采用同行同类型通通优惠，转矩大、支承重量大、回转寿命长。
- 适用Φ89×3000mm钻杆，机身占地适中，满足各类工程地质及施工的需求。
- 无线遥控行走系统，彻底消除操作行走、转场，装运过程中的安全隐患。
- 配置无线遥控行走系统，操作便捷，工作可靠。
- 配置康明斯发动机，功率更大，工作寿命更长。
- 配置两界深沉覆泵脱油机装置，工作手柄系统性能保护功能更完善。
- 配置伸缩式排渣(泥)口，用于清除钻进过程中产生的泥浆和渣屑，及可以远距离合流达土壤处理方法。

- Both rotation and pull-pull mechanisms utilize closed-loop systems, with hydraulic systems improving efficiency by 15%–20% compared to traditional systems, resulting in energy savings of 15%–20%.
- Integrated and modular structure ensures reasonable layout, no interference between components, allowing for integrated lifting, quick assembly, easy maintenance.
- Equipped with Cummins construction machinery engine, delivering strong power.
- High-torque rotary head drive, provides strong power and increases additional torque time to reduce operating torque, improving safety.
- Four-planetary rotary reducer with high torque, high load capacity, and long service life.
- Drill rods and swivel protection system made of 8-inch special wear-resistant steel, extending service life and enhancing operating performance, significantly reducing labor intensity and improving work efficiency.
- Compatible with Φ89×3000mm drill rods, moderate footprint, suitable for large-scale geological and construction projects.
- Wireless remote control walking system for convenient and reliable operation.
- Equipped with Cummins engine for greater power and longer service life.
- Roll-over protection frame and emergency stop device for better operational safety.
- Telescopic spoil discharge system for removing drilling mud and cuttings, with long-distance integrated discharge method.

液压马达
扭矩大、传动稳定；
旋转速度可无级调整；
推进效率更高、运行平稳

适用Φ89×3000mm钻杆，
机身占地适中
满足各类工程地质及
施工的需求



大象腿支撑
稳定可靠，快速升降
适应复杂地形施工

康明斯发动机
发动机功率大，动力强劲，
节能、环保、高效、动力强劲

伸缩式排渣(泥)口
远距离合流排出；
减少人工清理，提高效率

技术参数 Specifications

发动机 Engine Power	194/220KW	尺寸 size(L*W*H)	9500x2400x2900mm
最大推力 Max Thrust force	600/1200KN	重量 weight	15T
最大回拖力 Max Pullback force	600/1200KN	钻杆直径 Diameter of drilling rod	Φ89mm
最大扭矩 Max Torque	30000N.M	钻杆长度 Length of drilling rod	4.5m
最高转速 Max Rotary speed	120rpm	回拖管径 Max diameter of pullback pipe	Φ1500mm
最高动力头推进速度 Max Moving speed of power head	48m/min	最大穿越长度 Max construction length	800m
最大泥浆泵流量 Max Mud pump flow	600L/min	入射角 Incidence Angle	11° ~ 20°
最大泥浆压力 Max Mud pressure	10±0.5Mpa	爬坡角 Climbing Angle	14°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON
DRILLING MACHINE

S800A 水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

主要性能特点

MAIN PERFORMANCE CHARACTERISTICS

- 传动性能采用双液压减速系统，转速范围更宽，扭矩更大，整体传动性能更优，性能提高15%-20%，被拉、推拉、旋转扭矩更大。
- 整体、模块化结构布局合理，互不干涉，可整体吊装，快速连接，方便维护保养。
- 采用康明斯正品机电专用发动机，动力强劲，节能环保，满足国四排放标准。
- 大功率回转头驱动机构，动力强劲，同时能借大外扭矩控制可以降低开孔扭矩，提高安全性能。
- 采用闭环液压系统，动作平稳，效率高，发热低，系统性能更可靠耐久。
- 适用φ102×4500mm钻杆，机身占地适中，满足各类工程地质及施工的需求。
- 配置无线遥控行走系统，操作便捷，工作可靠。
- 配置履带防滑发动机，功率更大，工作寿命更长。
- 配置吊臂，工作范围更大，装卸更便捷。
- 配置前端式排渣(泥)口，用于清除钻进过程中产生的泥浆和渣屑，及可以远距离输送至土壕排放放。

- The transmission system adopts a dual hydraulic reduction system, with a wider speed range, larger torque, and overall performance improvement of 15%-20%.
- Integrated and modular structure ensures reasonable layout, no interference between components, easy hoisting, quick assembly, and convenient maintenance.
- Equipped with Cummins dedicated engine, delivering powerful performance, fuel efficiency, and meeting National IV emission standards.
- High-power rotary head drive provides strong power, and large outer torque control reduces opening torque, improving safety.
- The closed-loop hydraulic system ensures smooth action, high efficiency, low heat generation, and higher reliability and durability.
- Suitable for φ102×4500mm drill rods, with compact footprint to meet various geological and construction requirements.
- Wireless remote control walking system ensures convenient and reliable operation.
- High-power crawler engine, with higher power and longer service life.
- Equipped with boom arm for wider working range and easier loading/unloading.
- Front-end slurry outlet is used to remove mud and cuttings during drilling, and can be transported to designated discharge areas.

液压马达
扭矩大，传动稳定；
旋转速度可无级调整；
推拉效率更高，运行平稳

适用φ102×4500mm钻杆，机身占地适中
满足各类工程地质及施工的需求



大象腿支撑
稳定可靠，快速升降
适应复杂地形施工

康明斯发动机
发动机功率大，动力强劲，
节能、环保、高效、动力强劲

前端式排渣(泥)口
运输离合器排生；
减少人工清理，提高效率

技术参数 Specifications

发动机 Engine Power	264/220KW	尺寸 size(L*W*H)	9600x2500x2600mm
最大推力 Max Thrust force	800/1600KN	重量 weight	19T
最大回拖力 Max Pullback force	800/1600KN	钻杆直径 Diameter of drilling rod	φ102mm(或φ114mm)
最大扭矩 Max Torque	40000N.M	钻杆长度 Length of drilling rod	4.5m
最高转速 Max Rotary speed	120rpm	回拖管径 Max diameter of pullback pipe	φ300mm~φ1200mm
最高动力头推进速度 Max Moving speed of power head	40m/min	最大穿越长度 Max construction length	1000m
最大泥浆泵流量 Max Mud pump flow	800L/min	入射角 Incidence Angle	11°~20°
最大泥浆压力 Max Mud pressure	10±0.5Mpa	爬坡角 Climbing Angle	15°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON

DRILLING MACHINE

S1350 水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

主要性能特点

MAIN PERFORMANCE CHARACTERISTICS

- 传动性能优越，整体传动效率高15%-20%，扭矩更大，推拉更大。
- 整机结构布局合理，互不干涉，可整体拆装，快速运输，方便维护保养。
- 采用康明斯发动机，动力强劲，节能环保，满足国四排放标准。
- 大功率回转头驱动效机，动力强劲，回转扭矩大大扭矩控制可以降低开孔扭矩，提高安全性能。
- 采用闭式液压系统，动作平稳，效率高，发热低，系统性能更可靠耐久。
- 适用于135x6000mm钻杆，机身占地适中，满足各类工程地质及施工的要求。
- 配置无线遥控行走系统，操作轻松、工作可靠。
- 配置康明斯高发动机，功率更大，工作寿命更长。
- 配置抛雾泥桶，泥浆循环走向顺畅。
- 配置伸缩式排渣(泥)口，用于清除钻进过程中产生的泥浆和渣屑，及可以远距离运输至土罐排放。

- Excellent transmission performance with 15%-20% higher overall efficiency, providing larger torque and thrust.
- Reasonable overall layout with non-interfering components, allowing for complete disassembly, quick connection, and easy maintenance.
- Equipped with Cummins engine, delivering strong power, fuel efficiency, and meeting National IV emission standards.
- High-power rotary head drive system provides powerful torque while reducing opening torque for enhanced safety.
- Closed-loop hydraulic system ensures smooth operation, high efficiency, low heat generation, and long-lasting reliability.
- Suitable for Φ135x6000mm drill rods, with a compact footprint to meet various geological and construction requirements.
- Wireless remote control walking system for convenient and reliable operation.
- Equipped with high-power anti-slip engine on crawler, offering greater power and extended service life.
- Equipped with lighting system for safe and efficient night operations.
- Telescopic mud discharge outlet for efficient removal of mud and cuttings during drilling, with long-distance transport to designated discharge areas.

液压马达
扭矩大，传动稳定；
施转速度可无级调速；
推拉效率更高，运行平稳

适用Φ135x6000mm钻杆，
机身占地适中
满足各类工程地质及
施工的要求



大象腿支撑
稳定可靠，快速升降
适应复杂地形施工

康明斯发动机
发动机功率大，动力强劲，
节能，环保，高效，动力强劲

伸缩式排渣(泥)口
远距离运输操作；
减少人工清理，提高效率

S1350

技术参数 Specifications

	发动机 Engine Power	264/2200kW		尺寸 size(L*W*H)	11900×2960×3350mm
	最大推力 Max Thrust force	1350/2700KN		重量 weight	28T
	最大回拖力 Max Pullback force	1350/2700KN		钻杆直径 Diameter of drilling rod	Φ127mm
	最大扭矩 Max Torque	55000 N.M		钻杆长度 Length of drilling rod	6m
	最高转速 Max Rotary speed	100rpm		回拖管径 Pullback pipe	Φ1500mm
	最高动力头推进速度 Max Moving speed of power head	40m/min		最大穿越长度 Max construction length	1000m
	最大泥浆泵流量 Max Mud pump flow	1000 lpm		入射角 Incidence Angle	11°~22°
	最大泥浆压力 Max Mud pressure	10±0.5Mpa		爬坡角 Climbing Angle	15°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON
DRILLING MACHINE

ST2200 水平定向钻机...

HORIZONTAL DIRECTIONAL DRILLING MACHINE

MAIN FEATURES

- Efficient and stable transmission system with 15%-20% higher overall efficiency, ensuring stronger thrust and pullback.
- Optimized structure design with integrated layout for easy transportation, quick connection, and convenient maintenance.
- Adopts Cummins engine with strong power, high fuel efficiency, and meets National IV emission standards.
- Advanced hydraulic system with energy-saving technology, offering smooth operation, high efficiency, and low heat generation.
- Dual-speed rotary head drive system delivers powerful torque while reducing opening torque for enhanced safety.
- Closed-loop hydraulic system ensures smooth operation, high efficiency, low heat generation, and long-lasting reliability.
- Suitable for Φ127×6000mm drill rods, providing a compact footprint to meet various geological and construction requirements.
- Remote control walking system for convenient and reliable operation.
- Equipped with high-power anti-slip engine on crawler, offering greater power and extended service life.
- Lighting system for safe and efficient night operations.
- Telescopic mud discharge outlet for efficient removal of mud and cuttings during drilling, with long-distance transport to designated discharge areas.

POWERFUL ROTARY HEAD
High torque, stable transmission; dual-speed rotation for optimal performance in all geological conditions.

COMPACT & FLEXIBLE
Suitable for Φ127×6000mm drill rods, ideal for urban underground projects and various construction needs.



STABLE SUPPORT
Hydraulic leg support ensures fast leveling and stable operation even on uneven ground.

CUMMINS ENGINE
High-power, fuel-efficient engine delivers strong power with low fuel consumption and low emissions.

MUD DISCHARGE OUTLET
Telescopic mud discharge design reduces manual work and improves drilling efficiency.

ST2200

TECHNICAL SPECIFICATIONS

Engine Power	2*264/2200 KW	Dimension (L*W*H)	13300×3311×3650 mm
Max Thrust Force	2200/3000 kN	Weight	33 T
Max Pullback Force	2200/3000 kN	Diameter of Drilling Rod	Φ127 mm
Max Torque	85000 N·m	Length of Drilling Rod	6 m
Max Rotary Speed	100 rpm	Pullback Pipe	Φ1500 mm
Max Moving Speed of Power Head	38 m/min	Max Construction Length	1500 m
Max Mud Pump Flow	1000 L/min	Incidence Angle	11°~22°
Max Mud Pressure	10±0.5 Mpa	Climbing Angle	15°

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。
We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON
DRILLING MACHINE

ST3800

POWERFUL. PRECISE. RELIABLE.

HORIZONTAL DIRECTIONAL DRILLING MACHINE

MAIN FEATURES

- High power Cummins engine, powerful and reliable;
- Load-sensitive hydraulic system, energy-saving and efficient, smoother operation, and more coordinated compound actions;
- High torque power head, providing greater rotary torque, suitable for various complex geological conditions;
- Rack & pinion thrust system, strong thrust force, ensuring stable construction;
- Spacious and comfortable operator cabin, wide view and easy operation;
- Modular design, easier maintenance and service;
- Suitable for municipal engineering, oil & gas pipelines,
- power communication, water supply & drainage,
- and various trenchless applications.

SPACIOUS OPERATOR CABIN
Wide view, comfortable and easy operation.

POWERFUL ENGINE SYSTEM
Strong power, stable and reliable, suitable for a variety of complex working conditions.



HIGH TORQUE POWER HEAD
Adaptable to complex geological conditions.

RACK & PINION THRUST SYSTEM
Powerful thrust, stable and efficient operation.

LARGE DIAMETER MUD OUTLET
Efficient spoil discharge, reduce manual cleaning and improve efficiency.

SPECIFICATIONS

Engine Power	2*295/2200 KW	Diameter of Drilling Rod	Φ140 / 168 mm
Max Thrust Force	3800 kN	Length of Drilling Rod	9.6 m
Max Pullback Force	3800 kN	Max Diameter of Pullback Pipe	Φ300 mm ~ Φ2000 mm
Max Torque	138000 N·m	Max Construction Length	2000 m
Max Rotary Speed	95 rpm	Incidence Angle	8° ~ 19°
Max Moving Speed of Power Head	38 m/min	Climbing Angle	18°
Transport Dimensions (L*W*H)	18800×3200×4300 mm		
Weight	68 T		

Due to continuous product upgrades, specifications and appearance may change without prior notice. We reserve the right to change the parameters and design without informing the user in advance.

GRS

STETON

— ENGINEERING MACHINERY —

ST12000 水平定向钻机

HORIZONTAL DIRECTIONAL DRILLING MACHINE


POWERFUL PERFORMANCE

STABLE & RELIABLE OPERATION


PRECISE CONTROL HIGH EFFICIENCY

DURABLE CONSTRUCTION



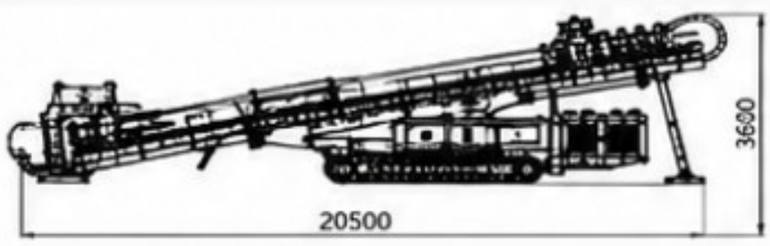



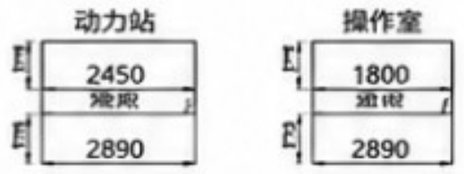

主要性能特点 MAIN PERFORMANCE CHARACTERISTICS

- 动力强劲，推拉力大，满足大口径长距离管道铺设需求。
- 采用大扭矩回转头，动力强劲，施工效率高。
- 推拉管采用大直径设计，承载能力强，适用于多种管材。
- 整机结构合理，稳定性高，爬坡、穿越能力强。
- 液压系统先进，操作精准，响应快速，施工更高效。
- 动力站与操作室分体设计，维护方便，适应复杂工况。

- Powerful engine with high thrust and pullback force, suitable for large diameter and long distance pipeline installation.
- Large torque rotary head ensures strong power and high construction efficiency.
- Large diameter pullback pipe design with strong bearing capacity, suitable for various pipe materials.
- Reasonable structure, high stability with strong climbing and crossing capability.
- Advanced hydraulic system with precise control, fast response and high construction efficiency.
- Separate power station and operator cabin for easy maintenance and adaptability to complex working conditions.

技术参数 SPECIFICATIONS

发动机（kW） Engine Power	410×3 + 153
最大顶力（kN） Max Thrust force	12000
最大回拖力（kN） Max Pullback force	12000
最大扭矩（N·m） Max Torque	240000
最高钻速（rpm） Max Rotary speed	92
最高推进速度（m/min） Max Moving speed of power head	35
最大泥浆泵流量（L/min） Overall Dimensions	NA
最大泥浆泵压力（Mpa） Max Mud pressure	NA
尺寸 L×W×H（mm） Size L×W×H	20500 × 3200 × 3600

重量（T） Weight	85
钻杆直径（mm） Diameter of drilling rod	Φ194 / Φ219
钻杆长度（m） Length of drilling rod	9.6
回拖管径（mm） Max diameter of pullback pipe	Φ300 ~ Φ2000
最大穿越长度（m） Max construction length	2000
入射角（°） Incidence Angle	8 – 19
爬坡角（°） Climbing Angle	18

因产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。

We reserve the right to change the parameters and design without informing the user in advance.

GRS
EQUIPMENTS AND SERVICES

STETON

DRILLING MACHINE

SEP-2000 永磁同步电动泥浆泵站...

PMSM Electric Mud Pump Station

STETON



技术参数 Specifications

形式 Type	三缸往复泵
行程 Stroke(mm)	150
缸径 Bore Diameter(mm)	165
流量 Flow Rate(Lpm)	2000/2300
压力 Pressure(Mpa)	10
电机功率 Rated Power(kW)	180
外形尺寸 Overall Dimensions(mm)	3100*2200*1700
重量 Weight (kg)	5000
动力电源 Power Unit	永磁同步电机
传动系统 Transmission System	行星减速机
控制方式 Control Method	本地/远程

SEP-2000

SEP-3000 永磁同步电动泥浆泵站...

PMSM Electric Mud Pump Station

STETON



技术参数 Specifications

形式 Type	三缸往复泵
行程 Stroke(mm)	175
缸径 Bore Diameter(mm)	200
流量 Flow Rate(Lpm)	3000/3500
压力 Pressure(Mpa)	10
电机功率 Rated Power(kW)	315
外形尺寸 Overall Dimensions(mm)	3555*2200*1875
重量 Weight (kg)	7980
动力电源 Power Unit	永磁同步电机
传动系统 Transmission System	行星减速机
控制方式 Control Method	本地/远程

SEP-3000

SEC-800 增程式混合动力电源站...

Range-Extender Hybrid Power Station



增程器	型号	BJ3.7Z35S*100
	电压/电容	600VDC/4242WC
	额定功率	100kW/2000rps
	油箱储容量	4.6L/min/油
动力电池	排放标准（国标示）	国IV标准（国标R）
	电池平台	600V
	容量	55kwh
整机电输出1	频率	50Hz
	输出1	3相 380V + N
	额定功率	150kW
整机电源输出1	频率	50Hz
	电压	220V
	额定功率	30kW
整机电源输出柴油	额定/最大功率	100kW/200kW
	额定/峰值扭矩	1200Nm/2400Nm
	额定/峰值转速	1500rps/3000rps
整机	整机重量	2000KG
	外形尺寸 (长*宽*高)	2860*1107*1700mm

SEC-800

STETON

SEP-1500 永磁同步电动泥浆泵站...

PMSM Electric Mud Pump Station

STETON



技术参数 Specifications

形式 Type	三缸往复泵
行程 Stroke(mm)	150
缸径 Bore Diameter(mm)	140
流量 Flow Rate(Lpm)	1500/1700
压力 Pressure(Mpa)	10
电机功率 Rated Power(kW)	110
外形尺寸 Overall Dimensions(mm)	2700*1950*1500
重量 Weight (kg)	3600
动力电源 Power Unit	永磁同步电机
传动系统 Transmission System	行星减速机
控制方式 Control Method	本地/远程

SEP-1500

因产品不断改进升级，技术参数及外观如如有变更恕不另行通知，敬请谅解。

We reserve the right to change the parameters and design without informing the user in advance.

钻具 Drill Tools...



导向钻头&分体定向钻头 Guide Head

规格(Model)	螺纹(寸) Thread	总长 (mm) Total Length	重量 (KG) Weight
ø44	R25 / R32	620	2.0
ø57	R25 / R32	620	3.0
ø67	R25 / R32	620	3.5
ø73	R32	660	4.5
ø89	R32	660	5.0
ø102	R50	660	10.0
ø127	R50	660	12.5
ø152	R50	660	16.0



风爪钻头 Reamer Bit



打开放扩孔器 Hole Opener



分体定向短钻头系列 Swivel Series

规格(DMM) Diameter	总长 (MM) Total Length	重量 (KG) Weight	喷嘴 (MM) Nozzle
ø44	127	0.7	ø12*2
ø57	133	1.2	ø14*2
ø67	141	1.6	ø14*2
ø75	145	2.0	ø16*2
ø89	153	2.5	ø16*3
ø102	165	3.2	ø18*3
ø127	185	6.5	ø20*3
ø152	195	8.0	ø20*3

牙轮钻头 Tricone Bit

规格(DMM) Diameter	总长 (MM) Total Length	重量 (KG) Weight
ø76	141	2.4
ø89	152	3.5
ø102	168	4.8
ø127	185	7.5

扩孔器 Reamer



泥浆泵配套系统 Mud mixing system



其他配件 Accessories





产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。 We reserve the right to change the parameters and design without informing the user in advance.

钻杆 Drill Rod





整体螺杆详细参数

规格型 (Model)	杆径径 Dia.	扣型/螺纹 Thread	杆径径 (mm)	扣型/螺纹 Thnm)	扣型螺 Thread	扣型螺 Thread	长度(mm) Length	重量(kg/根) Weight	壁厚(mm) Wall	抗拉强度级别 Grade	钢级别
ø90	2.1	1-1/10	7/6	G2	66	19	35	31	22	2.5	S135
ø50	3.0-	1-1/18	7/6	G2	66	19	35	31	22	2.5	S135
ø63	3.1	1-1/8	7/6	G2	60	19	35	31	22	2.6	S135
ø89	ST	NC23	8.6	G2	100	25	52	38	25	3.5	S135
ø102	ST	NC26	10.0	G2	102	26	52	38	26	5.0	S135
ø114	5/2	NC13.5	11.0	G2	117	31	31	31	26	6.0	S135
ø114	6/3	NC13.5	19.0	G2	153	40	70	57	28	7.0	S135
ø140	7/9	5-1/2FH	19.0	G2	158	40	70	57	28	7.0	S135
ø168	9/0	6-5/8FH	22.0	G2	180	50	86	66	36	10.0	S135

{STETON}

摩擦钻杆详细参数

规格型号 (Model)	杆径 (inch)	扣型 (inch)	壁厚 (mm)	扣外径 (nm)	内孔ID (nm)	扣长度 (mm)	全长度 (m)	全长度 (m)	产品重量 (kg/根)	产品重量 (kg/m)	钢级
s90	4	1-11/8	7.6	G2	66	19	35	35	22	2.5	S135
s90	4	1-11/8	7.6	G2	66	19	35	31	22	2.5	S135
s60	4	1-11/8	7.6	G2	66	19	35	31	22	2.5	S135
s63	4	NC23	8.6	G2	100	25	52	38	25	3.5	S135
g89	4	NC23	8.6	G2	100	25	52	38	25	3.5	S135
g102	4	NC26	10.0	G2	107	25	52	57	26	5.0	S135
g114	4	NC13.5	11.0	G2	117	31	31	50	50	5.0	S135
g152	4	5-1/2FH	19.0	G2	153	40	70	57	28	61.0	S135
g159	9/6	5-1/2FH	19.0	G2	153	40	70	57	28	61.0	S135
g168	9/6	6-5/8FH	22.0	G2	180	50	86	66	36	94.0	S135
g178	9/6	NC70	14.5	G2	190	25	281	775	133	113.0	S135
g273	12	NC70	14.5	G2	190	25	281	775	136	137.0	S135
g223	12	3-3/4FH	38.0	G2	330	91	127	102	50	28.0	2540

产品不断改进升级，技术参数及外观如有变更恕不另行通知，敬请谅解。 We reserve the right to change the parameters and design without informing the user in advance.

产品特点 Features

- 优质原材料 High Quality Raw Materials
- 精密加工 Precision Machining
- 耐磨耐用 Wear Resistant And Durable
- 高效作业 Efficient Operation
- 规格齐全 Complete Specifications

GRS
EQUIPMENTS AND SERVICES

STETON
» DRILLING MACHINE

BUILT FOR PERFORMANCE
TRUSTED WORLDWIDE

ADVANCED ENGINEERING | RELIABLE PERFORMANCE | GLOBAL PRESENCE | CUSTOMER SATISFACTION

The GRS EQUIPMENTS AND SERVICES continues to provide high quality drilling solutions that exceed expectations and drive success in every project. Our machines are operating in various countries across 5 Continents.

We are gradually expanding globally and have more satisfied customers in countries of Africa, Asia & Middle East, Europe and Worldwide.



国际服务
International Service

We can provide on-site Service.
We & Our partners spread services & spareparts in all over countries.

Service No. : Gulf, Africa, Asia, Europe, Thailand, and Worldwide.

国内服务
Domestic Service

快速、有效的服务是我们对您的承诺。
全国部分地区设有服务网点。

服务电话：400-114-4568
Service No. : All Domestic Areas

售后服务
AFTER-SALES SERVICE

PROVEN IN REAL PROJECTS
POWERING INFRASTRUCTURE ACROSS THE GLOBE



STRONG MACHINES. STRONGER SUPPORT. LASTING PARTNERSHIP.

THANK YOU FOR CHOOSING GRS EQUIPMENTS AND SERVICES.