


USART1: GDB Port  
 TRACESWO: External device or Optional FT232 Breakout  
 SPI2: JTAG interface (also supports bit-bang)  
 TIM4: JTMS signal generation  
 GPIO: LEDG, JTAG (partial)

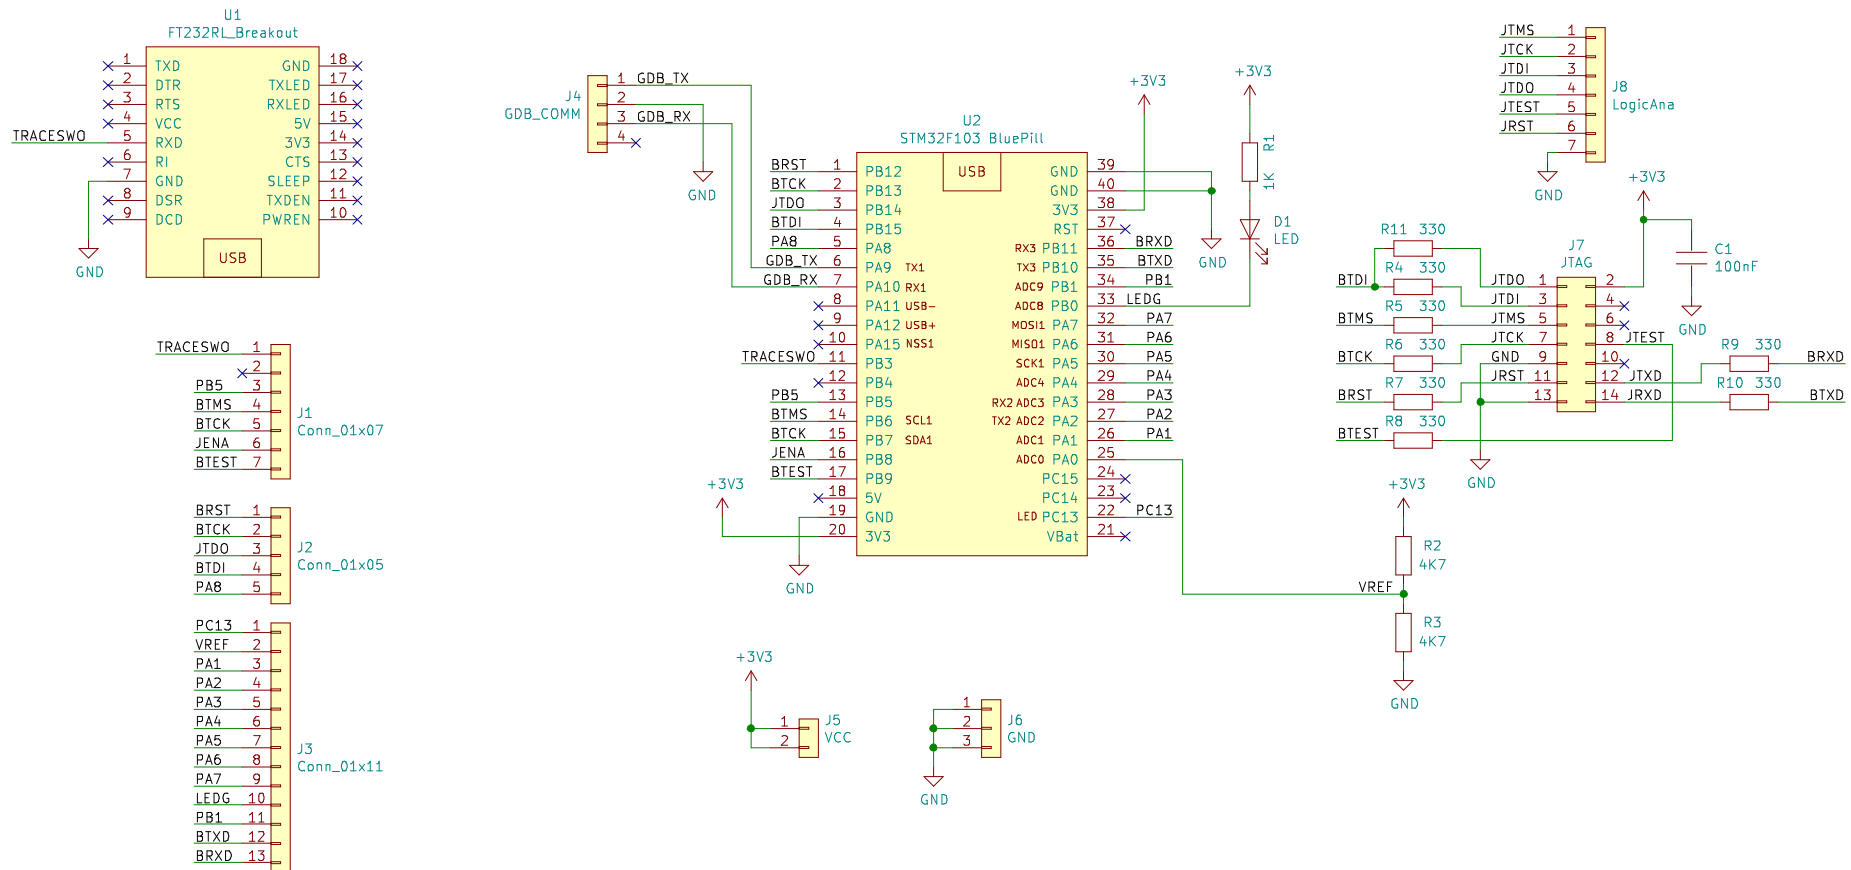

With optional TRACE SWO using FT232RL  
 Mathias Gruber

Sheet: /  
 File: BluePill-BMP.kicad\_sch

Title: MSPBMP Development Protoboard

Size: A4 Date: 2022-01-09

KiCad E.D.A. kicad (6.0.0)

Rev: 3

Id: 1/1