


USART1: GDB Port
 TRACESWO: External device or Optional FT232 Breakout
 SPI2: JTAG interface (also supports bit-bang)
 TIM4: JTMS signal generation
 GPIO: LEDG, JTAG (partial)

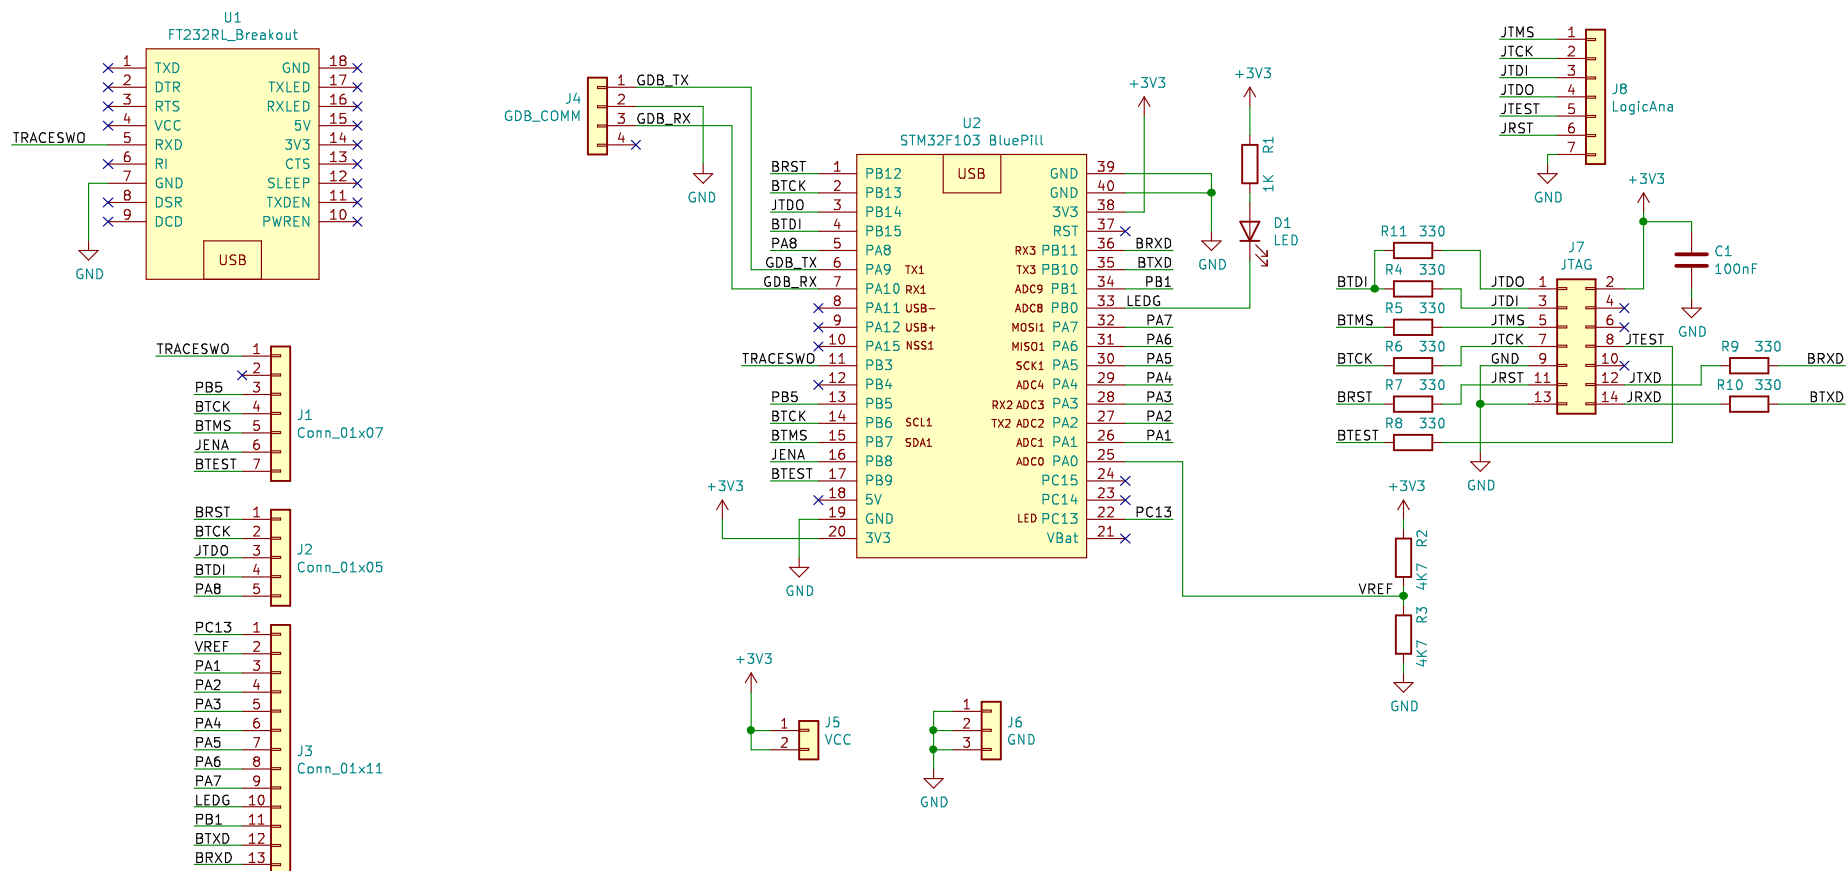

With optional TRACE SWO using FT232RL

Mathias Gruber

Sheet: /
File: BluePill-BMP.sch

Title: MSPBMP Development Protoboard

Size: A4 Date: 2021-11-07

KiCad E.D.A. kicad (5.1.12)-1

Rev: 1

Id: 1/1