

MPPT 4KW Solar Inverter




Features


- Pure sine wave
- Power factor 1.0
- PV input Voltage 60Vdc-500Vdc
- Built-in MPPT 100A
- Lithium Battery Activation
- Compatible work with LifePO4 Battery via RS485
- Capable to work without battery
- Detachable dust cover for harsh environment
- WiFi remote monitoring optional
- Support multiple output priority: UTL,SOL,SBU,SUB
- EQ function to optimize battery performance and extend lifecycle

This is a multi-functional inverter/charger, combining functions of inverter,solar charger and battery charger to offer uninterruptible power support in portable size. Its comprehensive LCD display offers user -configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority ,and acceptable input voltage based on different applications.

Application Diagram

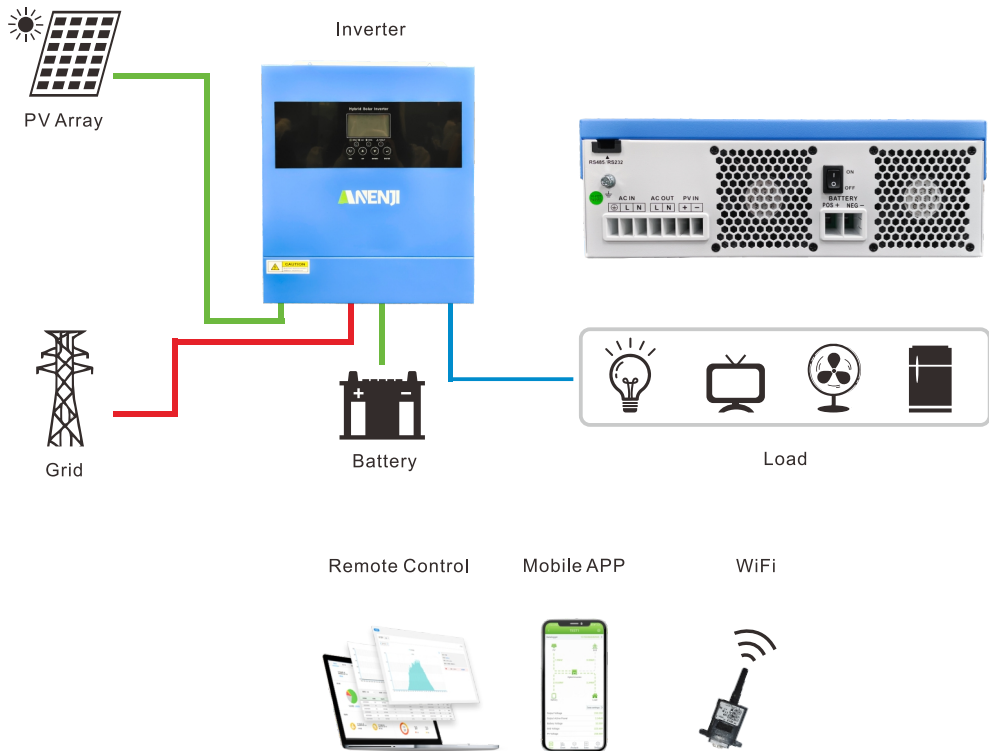

Working Mode

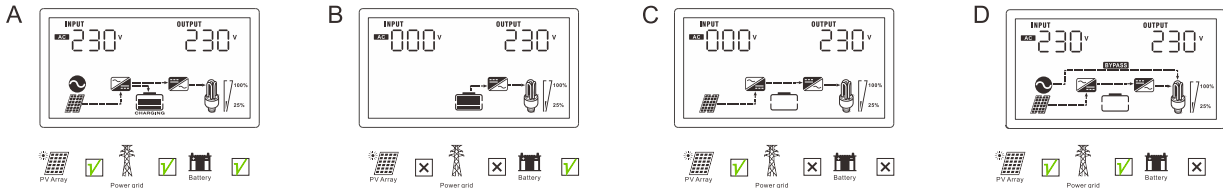

Technical Data

MODEL	ANJ-4000W-24V-WIFI
Capacity	4KVA/4KW
Parallel Capability	NO
INPUT	
Nominal Voltage	230VAC
Acceptable Voltage Range	170-280VAC(For personal Computer);90-280vac(For Home Appliances)
Frequency	50/60 Hz(Auto sensing)
OUTPUT	
Nominal Voltage	220/230VAC±5%
Surge Power	7000VA
Frequency	50/60Hz
Waveform	Pure Sine wave
Transfer Time	10ms(For personal Computer);20ms(For Home Appliances)
Peak Efficiency(PV to INV)	96%
Peak Efficiency(Battery to INV)	93%
Overload Protection	5s@ >= 150% load; 10s@110%~150% load
Crest Factor	3:1
Admissible Power Factor	0.6~1 (inductive or capacitive)
BATTERY	
Battery Voltage	24VDC
Floating Charge Voltage	27VDC
OverCharge Protection	33VDC
Charging Method	CC / CV
Lithium Battery Activation	YES
Lithim battery Communication	YES(RS485)
SOLAR CHARGER & AC CHARGER	
Solar Charger Type	MPPT
Max.PV Array Power	4000W
Max.PV Array Open Circuit Voltage	500VDC
PV Array MPPT Voltage Range	60VDC~500VDC
Max.Solar Input Current	15A
Max.Solar Charge Current	100A
Max.AC Charge Current	80A
Max.Charge Current (PV+AC)	100A
PHYSICAL	
Dimensions,D x W x H(mm)	358*295*100
Package Dimensions,D x W x H(mm)	465*380*175
Net Weight(Kg)	7
Communication Interface	RS232+RS485
ENVIRONMENT	
Operating Temperature Range	(-10°C to 50°C)
Storage Temperature	(-15°C ~ 50°C)
Humidity	5% to 95% Relative Humidity (Non-condensing)

Product specifications are subject to change without further notice.